



CONFIDENTIAL

TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +125 degrees C
Vcc Voltage, Vdc	+9.0
Vtune Voltage, Vdc	+13.0
DC Voltage applied to RF out	+/- 25

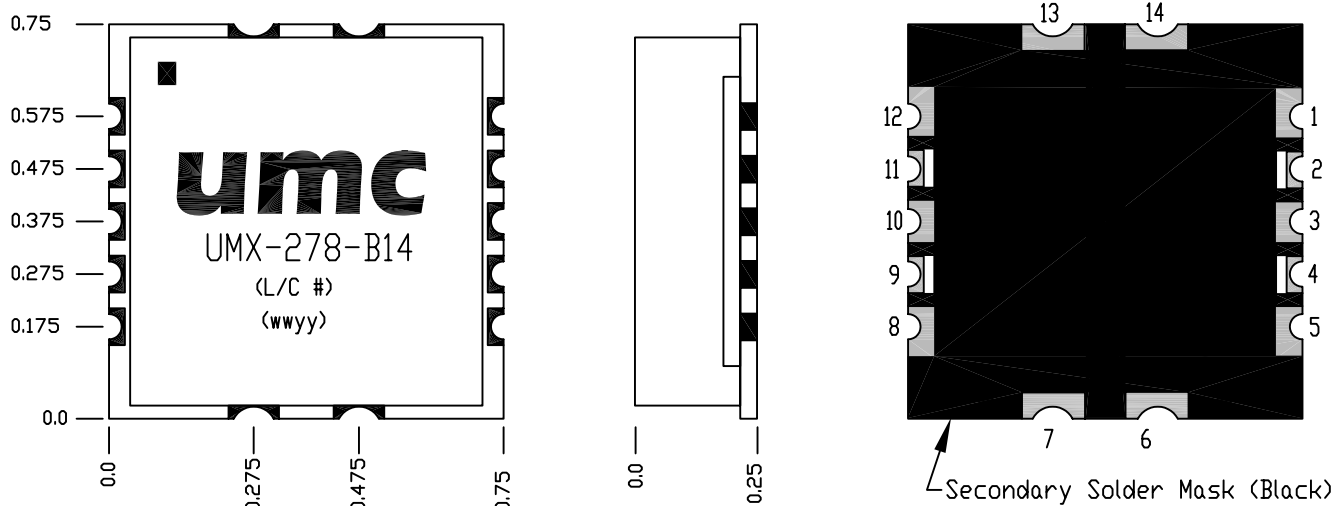


TABLE 1.2, CONTACT ASSIGNMENTS

CONTACT ASSIGNMENTS:	
2: TUNING VOLTAGE INPUT	
4: NO CONNECT	
9: RF OUTPUT	
11: DC SUPPLY INPUT	
ALL OTHER CONTACTS ARE GROUND	

Unless otherwise specified,
dimensions are in inches
TOLERANCES
.X = +/- .1
.XX = +/- .01
.XXX = +/- .005
ANG = +/- 2°
Universal Microwave Corporation
Proprietary Document

Prepared by: A.BYRD 11/17/05
Engineer:
Universal Microwave Corporation
2339 Destiny Way
Odessa, FL 33556

Universal Microwave Corp.
SPECIFICATION CONTROL
DRAWING FOR UMX-278-B14

SIZE A	FSCM NO.	DWG NO. UP-278	REV A
SCALE: N/A		SHEET 1 OF 2	

	MIN.	TYP.	MAX.
Frequency, MHz	1015	--	1055
Power Output, dBm	+4.0	+6.0	+8.0
Harmonics, dBc		-20	-10
SSB Phase Noise, dBc/Hz:			
@ Offset = 100Hz		-70	-65
@ Offset = 1kHz		-100	-95
@ Offset = 10kHz		-125	-122
@ Offset = 100kHz		-145	-142
@ Offset = 1MHz		-164	-159
Pushing, MHz/V		0.2	1
Pulling, MHz p-p, @12dB_r, all phases		0.3	1
Tuning Voltage, Vdc	0		+12.0
Tuning Sensitivity, MHz/V		4	
Frequency drift with temperature:			
@ -40°C, MHz		1	2
@ +85°C, MHz		0.8	2
Supply Voltage, Vdc		+8.0	
Supply Current, mA		29	
Output Power @ V_t = 0 and 12V	+3.0		
Tuning Port Capacitance, pF		100	
3dB Modulation Bandwidth, kHz		1000	

TABLE 1.3 ELECTRICAL SPECIFICATIONS

SPECIFICATION CONTROL DRAWING			
Drawing No. UMX-278-B14			
Size	A	REV	A
Engineer: T.KRAUS 10/11/05		SHEET 2 OF 2	