



CONFIDENTIAL

TABLE 1.1, ABSOLUTE MAXIMUM RATINGS

Operating Temperature Range	-40 to +85 degrees C
Storage Temperature Range	-55 to +125 degrees C
Vcc Voltage, Vdc	+9.0
Vtune Voltage, Vdc	+9.0
DC Voltage applied to RF out	+/- 0V

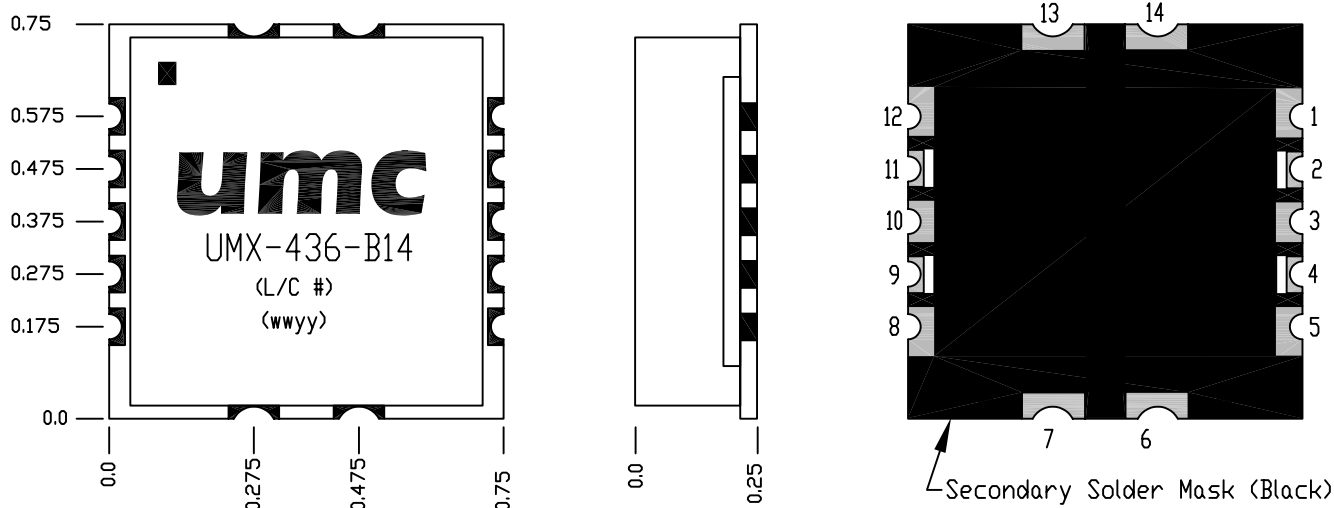


TABLE 1.2, CONTACT ASSIGNMENTS

CONTACT ASSIGNMENTS:	
2: TUNING VOLTAGE INPUT	
4: NO CONNECT	
9: RF OUTPUT	
11: DC SUPPLY INPUT	
ALL OTHER CONTACTS ARE GROUND	

Unless otherwise specified, dimensions are in inches
 TOLERANCES
 .X =+/-0.1
 .XX =+/-0.01
 .XXX =+/-0.005
 ANG =+/-2°
 Universal Microwave Corporation
 Proprietary Document

Universal Microwave Corp.
 SPECIFICATION CONTROL
 DRAWING FOR UMX-436-B14

Prepared by: A.BYRD 11/22/05
 Engineer:
 Universal Microwave Corporation
 2339 Destiny Way
 Odessa, FL 33556

SIZE A	FSCM NO.	DWG NO. UP-436	REV A
SCALE: N/A		SHEET 1 OF 2	

	MIN.	TYP.	MAX.
Frequency, MHz		1200	
Power Output, dBm	+6.0	+8.0	+10.0
Harmonics, dBc		-20	-10
SSB Phase Noise, dBc/Hz:			
@ Offset = 1kHz		-103	-98
@ Offset = 10kHz		-127	-122
@ Offset = 100kHz		-147	-142
@ Offset = 1MHz		-164	-159
@ Offset = 10MHz		-164	-159
Pushing, MHz/V		0.1	0.5
Pulling, MHz p-p, @12dB _r , all phases		0.5	1.0
Tuning Voltage, Vdc	+1.0		+8.0
Tuning Sensitivity, MHz/V		2.0	
Frequency drift with temperature:			
@ -40°C, MHz		0.25	0.50
@ +85°C, MHz		0.25	0.50
Supply Voltage, Vdc		+8.0	
Supply Current, mA		29	
Output Power @ $V_t = 0$ and 8V	+6.0		
Tuning Port Capacitance, pF		47	
3dB Modulation Bandwidth, kHz		1000	

TABLE 1.3 ELECTRICAL SPECIFICATIONS

SPECIFICATION CONTROL DRAWING			
Drawing No. UMX-436-B14			
Size	A	REV	A
Engineer: T.KRAUS 11/10/05		SHEET 2 OF 2	