


Power Supply IC
S1F7760x Series
Technical Manual

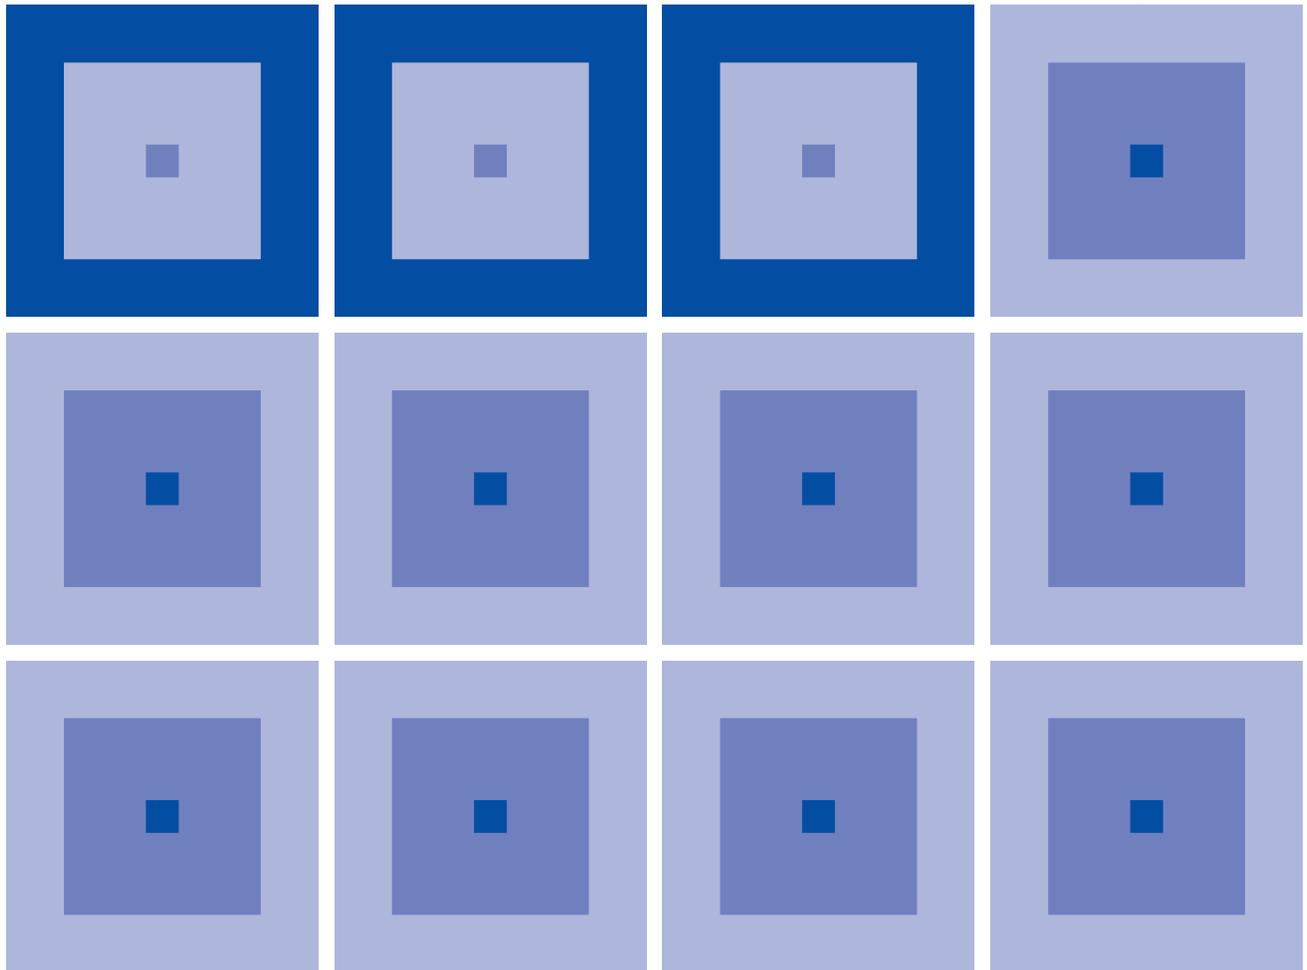

NOTICE


No part of this material may be reproduced or duplicated in any form or by any means without the written permission of Seiko Epson. Seiko Epson reserves the right to make changes to this material without notice. Seiko Epson does not assume any liability of any kind arising out of any inaccuracies contained in this material or due to its application or use in any product or circuit and, further, there is no representation that this material is applicable to products requiring high level reliability, such as, medical products. Moreover, no license to any intellectual property rights is granted by implication or otherwise, and there is no representation or warranty that anything made in accordance with this material will be free from any patent or copyright infringement of a third party. This material or portions thereof may contain technology or the subject relating to strategic products under the control of the Foreign Exchange and Foreign Trade Law of Japan and may require an export license from the Ministry of International Trade and Industry or other approval from another government agency.

All other product names mentioned herein are trademarks and/or registered trademarks of their respective companies.

©SEIKO EPSON CORPORATION 2003, All rights reserved.

Configuration of product number

● DEVICES

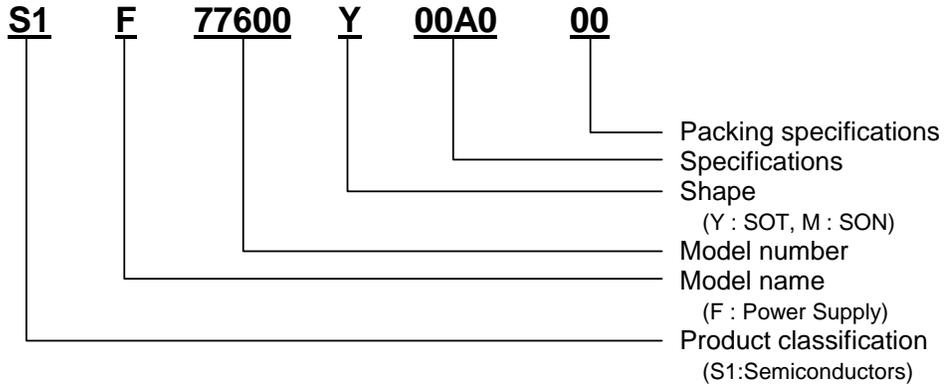

CONTENTS

1. DESCRIPTION	1
2. FEATURES	1
3. LIST OF SERIES PRODUCT NAMES	1
4. BLOCK DIAGRAM	2
5. DESCRIPTION OF BLOCK DIAGRAM	3
6. PACKAGE	3
6.1 SOT89-3pin (S1F7760xY0x000L).....	3
6.2 SON-6pin (S1F7760xM0x000L).....	4
7. FUNCTIONAL DESCRIPTION	5
7.1 Outline of Operation	5
8. ABSOLUTE MAXIMUM RATINGS	7
9. ELECTRICAL CHARACTERISTICS	8
9.1 Model with Detection Voltage 1.2V and Release Voltage 2.0V, Nch/Pch models	8
9.2 Model with Detection Voltage 2.4V and Release Voltage 2.7V, Nch/Pch models	9
10. EXTERNAL CONNECTION DIAGRAM	12
11. EXAMPLES OF CIRCUITS	13

1. DESCRIPTION

S1F77600 Series comprises high-accuracy, low-consumption low-voltage detectors which work at a low voltage. Output is guaranteed until supply voltage reaches 0V. They are ICs used to prevent liquid leakage of a dry cell by detecting the voltage drop of power supply of two cells connected in series. The internal circuits of the ICs consist of reference voltage circuits, comparators, resistances for detecting voltage, hysteresis circuits, output-securing circuits (forced output Hi-Z) and output transistors.

Detection voltage is of non-adjustment type, fixed inside the IC at high accuracy.

Output form is selectable from P-ch open drain and N-ch open drain.

The package is comprised of SOT89-3 pin and SON-6 pin (under development).

These ICs are best suited to the dry-cell liquid leakage prevention/protection circuit of a portable product which uses power supply of two dry cells connected in series.

2. FEATURES

- Current consumption..... Max.5.0μA (V_{DD} = 3.0V, P-ch output)
Max.5.5μA (V_{DD} = 3.0V, N-ch output)
- Operational voltage..... 0.8V to 5.5V
- Forced output Hi-Z..... 0.0V to 1.0V
- Detection voltage ① 1.2V to 1.6V (0.05V step: mask option)
② 1.7V to 2.5V (0.1V step: mask option)
- Accuracy of voltage detection..... ① ±3.5% (T_a = 25°C, detection voltage 1.2V)
② ±2.0% (T_a = 25°C, detection voltage 2.4V)
- Detection temperature characteristics -320ppm/°C
- Hysteresis width..... ① 0.2V to 1.0V (0.05V step: mask option)
② 0.12V to 0.3V (0.02V step: mask option)
- Release voltage Detection voltage + hysteresis width
- Accuracy of release voltage ① ±2.5% (T_a = 25°C, detection voltage 1.2V)
② ±2.0% (T_a = 25°C, detection voltage 2.4V)
- Release temperature characteristics -260ppm/°C
- Operational temperature..... -30°C to +85°C
- Output form..... P-ch open drain, N-ch open drain (mask option)
- Shipment form SOT89-3pin, SON-6 pin (under development)

※ The products have no radiation-resistant or light-proof design.

3. LIST OF SERIES PRODUCT NAMES


Table 3.1 List of Series Product Names

Product name	Detection voltage [V]			Release voltage [V]			Output form	Shipment form
	Min.	Typ.	Max.	Min.	Typ.	Max.		
S1F77600Y0A000L	1.158	1.200	1.242	1.950	2.000	2.050	Nch	SOT89-3
S1F77600M0A000L*								SON-6
S1F77601Y0A000L							Pch	SOT89-3
S1F77601M0A000L*								SON-6
S1F77602Y0A000L*	2.352	2.400	2.448	2.646	2.700	2.754	Nch	SOT89-3
S1F77602M0A000L*								SON-6
S1F77603Y0A000L*							Pch	SOT89-3
S1F77603M0A000L*								SON-6

* Under development

(Note 1) A lineup of detection voltage and release voltage other than those in the above table is also available.

4. BLOCK DIAGRAM

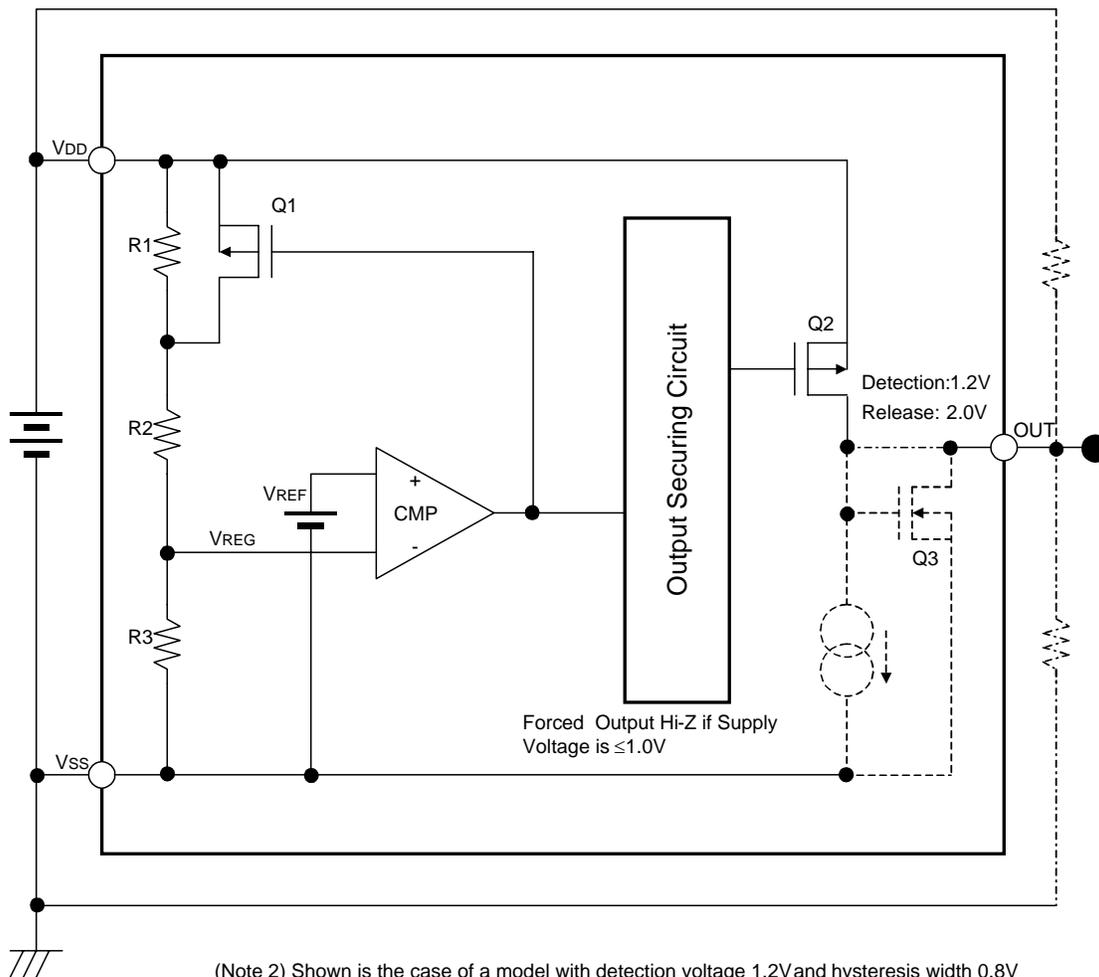

(Note 2) Shown is the case of a model with detection voltage 1.2V and hysteresis width 0.8V

(Note 3) - - - - P-ch open drain output
 - - - - N-ch open drain output
 (Mask option allows you to select either output form.)

Fig.4.1 Block diagram

5. DESCRIPTION OF BLOCK DIAGRAM

(1) Reference voltage: V_{REF}

Generates reference voltage and reference current required for the inside of IC.

(2) Comparator CMP

Compares the divided potentials of resistances connected between power supply (V_{REG}) with the reference voltage generated inside IC (V_{REF}).

(3) Resistances for detecting voltage: R1, R2, R3

Divided potential resistances which determine detection and release voltages. Either voltage is selectable with aluminum option.

(4) Hysteresis: Q1

A transistor for hysteresis to prevent malfunction (output oscillation, etc.) caused by noise in power supply.

(5) Output securing circuit

Forces output pin to output fixed voltage Hi-Z if IC's operational voltage drops to the lower limit or lower.

(6) Output transistors: Q2, Q3

Transistors to output by P-ch open drain (Q2) and N-ch open drain (Q3).

6. PACKAGE

6.1 SOT89-3pin (S1F7760xY0x000L)

Pin Assignment

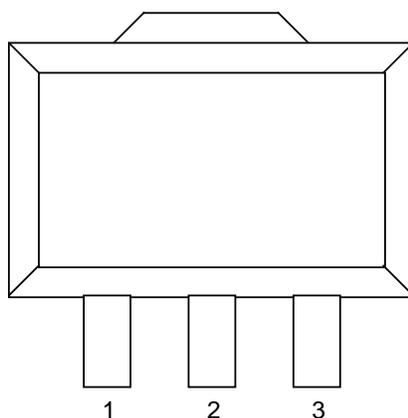


Fig.6.1 SOT89-3 Pin Assignment

Pin Description

Table 6.1 List of SOT89-3 Pins

Pin name	I/O	Pin No.	Function
OUT	O	1	Detected-voltage output pin (selectable from P-ch/N-ch open drain)
VSS	I	2	Input voltage pin (negative)
VDD	I	3	Input voltage pin (positive)

6.2 SON-6pin (S1F7760xM0x000L)

Pin Assignment

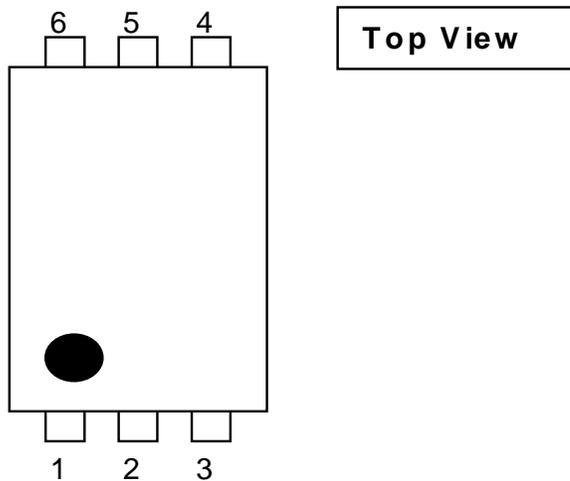


Fig.6.2 SON-6 Pin Assignment

Pin Description

Table 6.2 List of SON-6 Pins

Pin name	I/O	Pin No.	Function
OUT	O	1	Voltage detection output pin (Pch/Nch open drain selectable)
Vss	I	2	Input voltage pin (negative)
VDD	I	3	Input voltage pin (positive)
NC	—	4	NC pin (normally open)
NC	—	5	NC pin (normally open)
NC	—	6	NC pin (normally open)

7. FUNCTIONAL DESCRIPTION

7.1 Outline of Operation

S1F77600 Series comprises high-accuracy, low-consumption low-voltage detectors which work at a low voltage. A detector detects voltage by inputting into a comparator the divided potentials of resistances, R1, R2 and R3, connected between power supply (VREG) and the reference voltage generated inside IC (VREF). It has hysteresis added to prevent malfunction caused by power supply noise because it can detect difference of potential between VREG and VREF even if the difference is very small.

The detection voltage (-VDET), which is found if input voltage drops, and the release voltage (+VDET), which is found if input voltage rises, are defined by the following formulas:

$$\text{Detection voltage: } -V_{DET} = ((R2+R3)/R3) \times V_{REF} \dots\dots\dots(\text{formula 7.1.1})$$

$$\text{Release voltage: } +V_{DET} = ((R1+R2+R3)/R3) \times V_{REF} \dots\dots\dots(\text{formula 7.1.2})$$

S1F77600 Series forces output of fixed voltage Hi-Z if operational voltage drops to the lower limit or lower. Fig.7.1.1 and 7.1.2 show I/O characteristics of P-ch and N-ch open drain outputs, respectively.

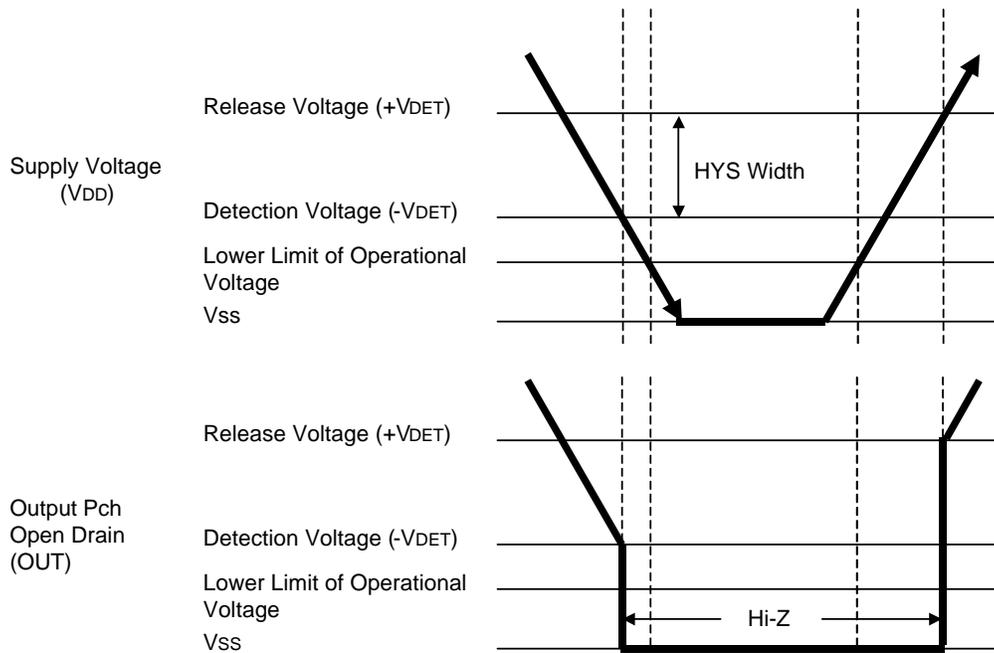


Fig.7.1.1 I/O characteristics of P-ch open drain

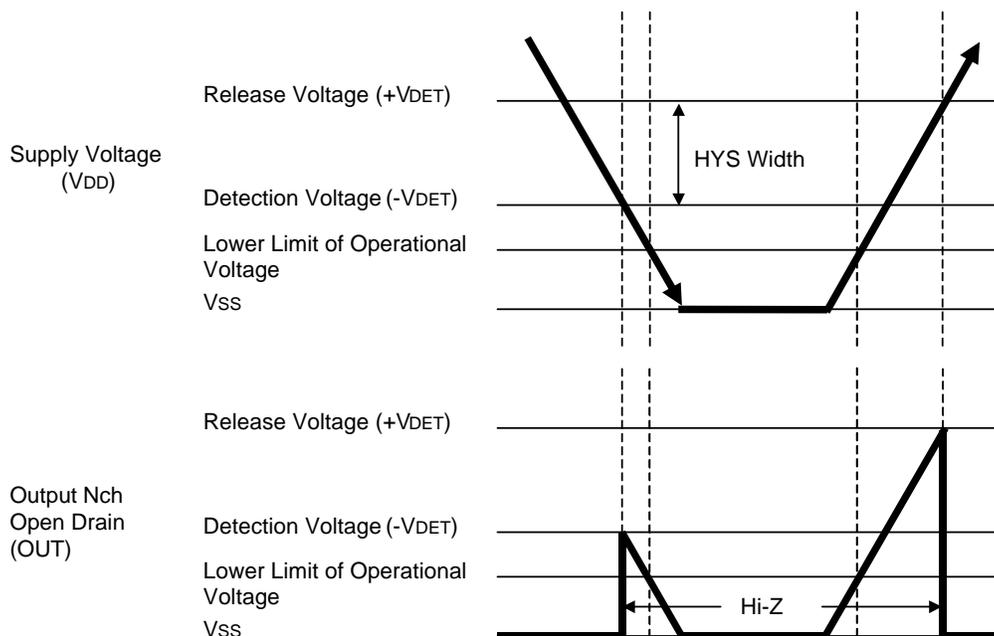


Fig.7.1.2 I/O characteristics of N-ch open drain

(Note 4) The I/O characteristics of output P-ch or N-ch open drain shown in each figure above show examples where a pull-down or pull-up resistance is connected to output pin, respectively.

8. ABSOLUTE MAXIMUM RATINGS

Items	Symbols	Rated values		Units	Applicable pins	Remarks
		Min.	Max.			
Input supply voltage	V _{DD}	-0.3	7.0	V	V _{DD}	—
Output voltage	V _{OUT}	-0.3	7.0	V	OUT	—
Output current	I _{OUT}	—	10	mA	OUT	—
Tolerable loss	P _d	—	200	mW	—	-30 to +85°C
Operating temperature	T _{opr}	-30	85	°C	—	—
Storage temperature	T _{stg}	-55	150	°C	—	—
Soldering temperature and time	T _{sol}	—	250•10	°C•s	—	—

(Note 5) Don't apply voltage to output pin from outside.

(Note 6) Use of the product under a condition beyond absolute maximum ratings may cause malfunction or permanent failure of the IC.

Also, it may reduce reliability of the IC greatly, even if the IC works normally just temporally under such condition.

9. ELECTRICAL CHARACTERISTICS

9.1 Model with Detection Voltage 1.2V and Release Voltage 2.0V, Nch/Pch models

($T_a=25^{\circ}\text{C}$, unless specified otherwise (Note 7))

Items	Symbols	Conditions	Standard values			Units	Notes		
			Min.	Typ.	Max.				
Operational voltage	VDD	$T_a = -30^{\circ}\text{C}$ to $+85^{\circ}\text{C}$	0.80	—	5.50	V	—		
Detection voltage	-VDET	—	1.158	1.200	1.242	V	—		
Release voltage	+VDET	—	1.950	2.000	2.050	V	—		
Hysteresis width	VHYS	$V_{\text{HYS}} = (+V_{\text{DET}}) - (-V_{\text{DET}})$	0.708	0.800	0.892	V	—		
Current consumption 1	IOP1	$V_{\text{DD}} = 3.0\text{V}$ $T_a = -30^{\circ}\text{C}$ to $+85^{\circ}\text{C}$	P-ch	—	3.00	5.00	μA	—	
			N-ch	—	3.50	5.50	μA	—	
Current consumption 2	IOP2	$V_{\text{DD}} = 0.7\text{V}$ $T_a = -30^{\circ}\text{C}$ to $+85^{\circ}\text{C}$	P-ch	—	0.35	0.95	μA	—	
			N-ch	—	0.40	1.00	μA	—	
Output current	IOUT	P-ch	$V_{\text{DD}} = 3.0\text{V}$, $\text{OUT} = 2.8\text{V}$		0.30	0.45	—	mA	—
		N-ch	$V_{\text{DD}} = 3.0\text{V}$, $\text{OUT} = 0.2\text{V}$		0.40	0.55	—	mA	—
Transfer delay time	TPHL	P-ch	$T_a = -30^{\circ}\text{C}$ to $+85^{\circ}\text{C}$		—	—	1	ms	9
		N-ch	$T_a = -30^{\circ}\text{C}$ to $+85^{\circ}\text{C}$		—	—	1	ms	10
	TPLH	P-ch	$T_a = -30^{\circ}\text{C}$ to $+85^{\circ}\text{C}$		—	—	100	μs	9
		N-ch	$T_a = -30^{\circ}\text{C}$ to $+85^{\circ}\text{C}$		—	—	100	μs	10
Temperature characteristics of detection voltage	$\Delta\text{-VDET}$ ΔT_{opr}	$T_a = -30^{\circ}\text{C}$ to $+85^{\circ}\text{C}$	-560	-320	-200	ppm / $^{\circ}\text{C}$	8		
Temperature characteristics of release voltage	$\Delta\text{+VDET}$ ΔT_{opr}	$T_a = -30^{\circ}\text{C}$ to $+85^{\circ}\text{C}$	-470	-260	0	ppm / $^{\circ}\text{C}$	8		

(Note 7) OUT pin is open unless specified otherwise.

(Note 8) Temperature characteristics are calculated using the following formula:

$$\Delta V_{\text{DET}} / \Delta T_{\text{opr}} = (((V_{\text{DETH}} - V_{\text{DETL}}) / V_{\text{DETM}}) / 115) \times 10^6$$

VDETH : Value of detection/release voltage at 85°C

VDETL : Value of detection/release voltage at -30°C

VDETM : Value of detection/release voltage at 25°C

9.2 Model with Detection Voltage 2.4V and Release Voltage 2.7V, Nch/Pch models

(Ta=25°C, unless specified otherwise (Note 7))

Items	Symbols	Conditions	Standard values			Units	Notes		
			Min.	Typ.	Max.				
Operational voltage	V _{DD}	T _a = -30°C to +85°C	0.80	—	5.50	V	—		
Detection voltage	-V _{DET}	—	2.352	2.400	2.448	V	—		
Release voltage	+V _{DET}	—	2.646	2.700	2.754	V	—		
Hysteresis width	V _{HYS}	V _{HYS} = (+V _{DET}) - (-V _{DET})	0.198	0.300	0.402	V	—		
Current consumption 1	IOP1	V _{DD} = 3.0V T _a = -30°C to +85°C	P-ch	—	3.00	5.00	μA	—	
			N-ch	—	3.50	5.50	μA	—	
Current consumption 2	IOP2	V _{DD} = 0.7V T _a = -30°C to +85°C	P-ch	—	0.35	0.95	μA	—	
			N-ch	—	0.40	1.00	μA	—	
Output current	IOUT	P-ch	V _{DD} = 3.0V, OUT = 2.8V		0.30	0.45	—	mA	—
		N-ch	V _{DD} = 3.0V, OUT = 0.2V		0.40	0.55	—	mA	—
Transfer delay time	T _{PHL}	P-ch	T _a = -30°C to +85°C		—	—	1	ms	9
		N-ch	T _a = -30°C to +85°C		—	—	1	ms	10
	T _{PLH}	P-ch	T _a = -30°C to +85°C		—	—	100	μs	9
		N-ch	T _a = -30°C to +85°C		—	—	100	μs	10
Temperature characteristics of detection voltage	Δ-V _{DET} ΔT _{opr}	T _a = -30°C to +85°C	-560	-320	-200	ppm / °C	8		
Temperature characteristics of release voltage	Δ+V _{DET} ΔT _{opr}	T _a = -30°C to +85°C	-470	-260	0	ppm / °C	8		

(Note 7) OUT pin is open unless specified otherwise.

(Note 8) Temperature characteristics are calculated using the following formula:



$$\Delta V_{DET}/\Delta T_{opr} = (((V_{DETH} - V_{DETL})/V_{DETM})/115) \times 10^6$$

V_{DETH} : Value of detection/release voltage at 85°C

V_{DETL} : Value of detection/release voltage at -30°C



V_{DETM} : Value of detection/release voltage at 25°C

(Note 9) Explanatory diagram of measuring transfer delay time

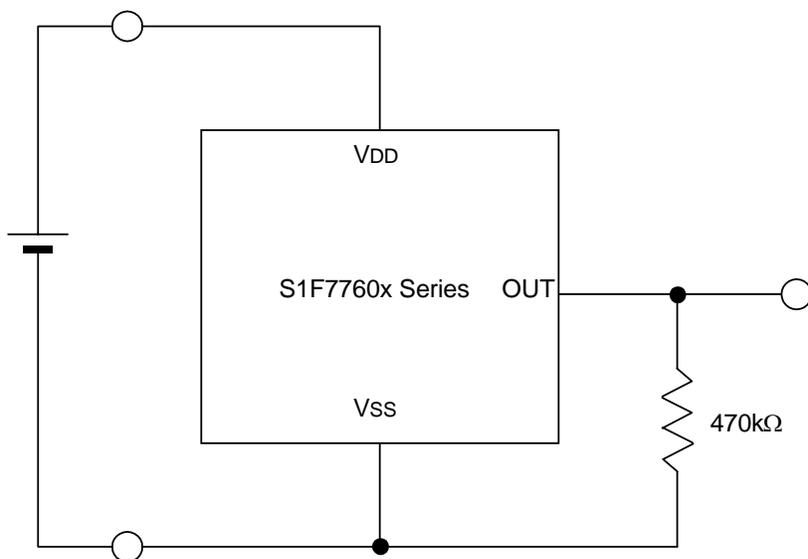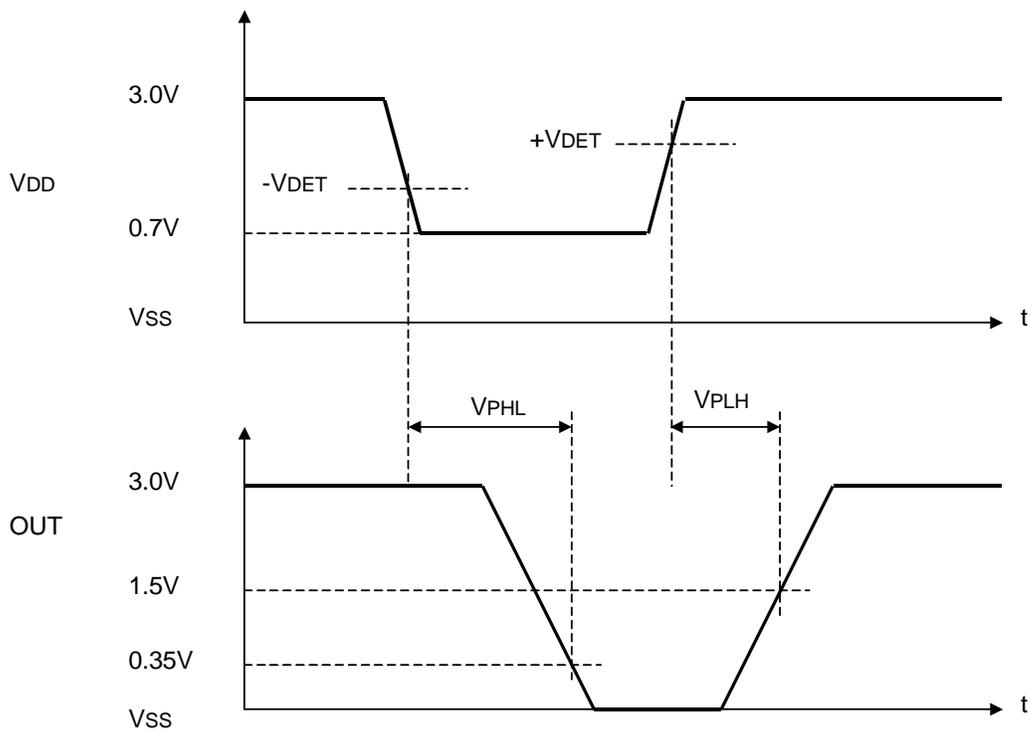

This explanatory diagram covers a P-ch open drain output model.

(Note 10) Explanatory diagram of measuring transfer delay time

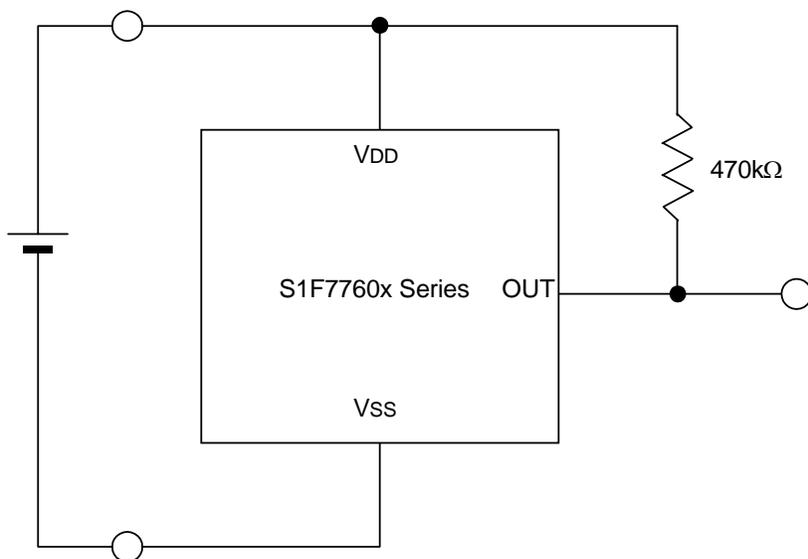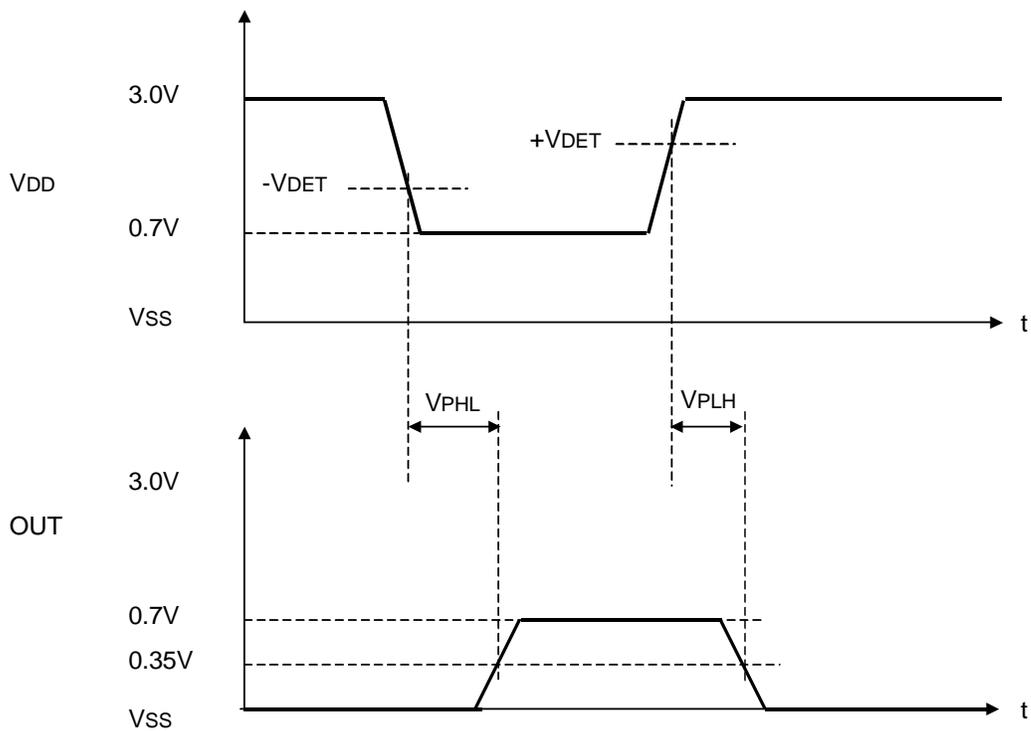

This explanatory diagram covers an N-ch open drain output model.

10. EXTERNAL CONNECTION DIAGRAM

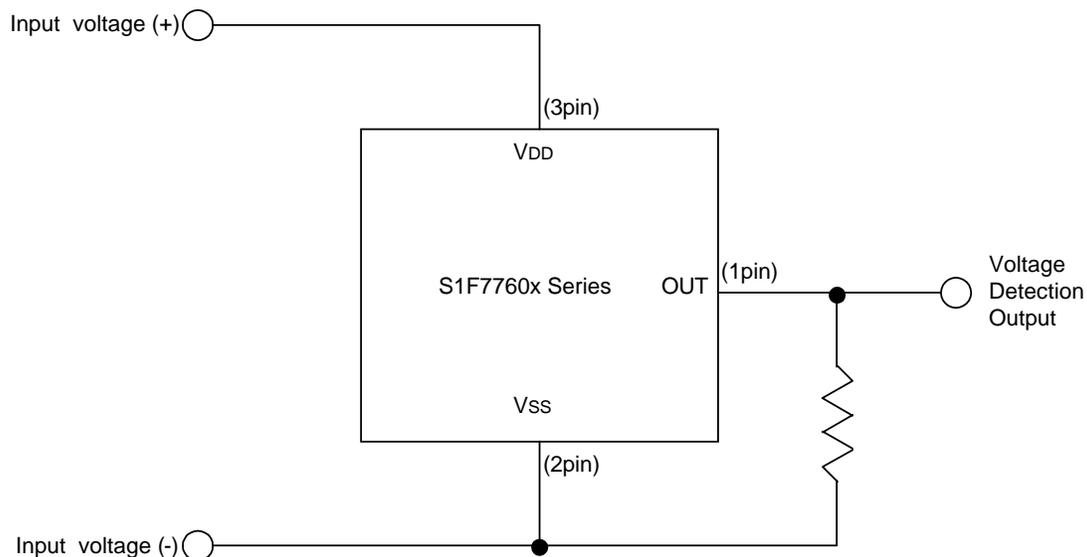


Fig.10.1 Connection diagram of a P-ch open drain model

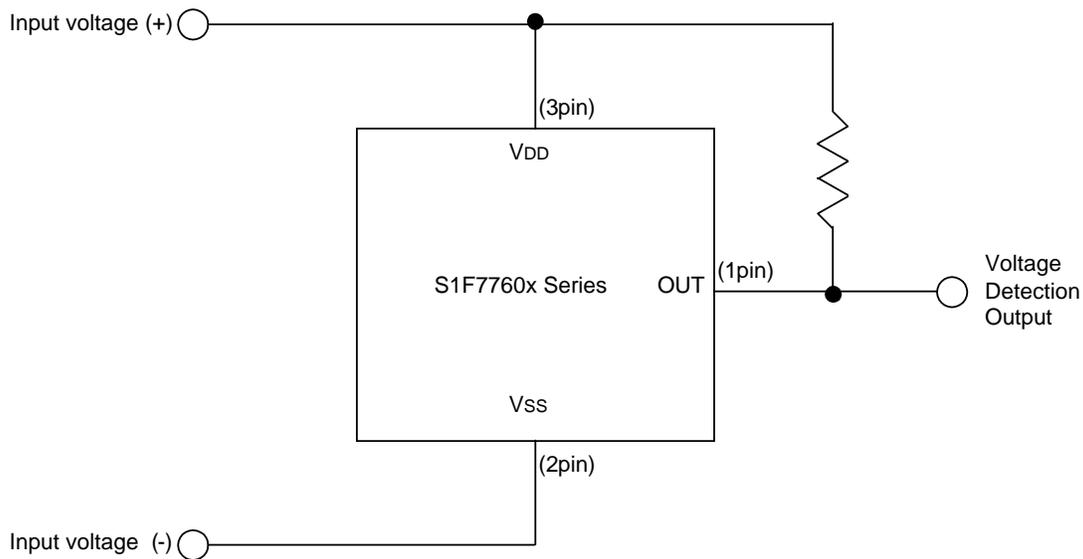


Fig.10.2 Connection diagram of an N-ch open drain model

11. EXAMPLES OF CIRCUITS

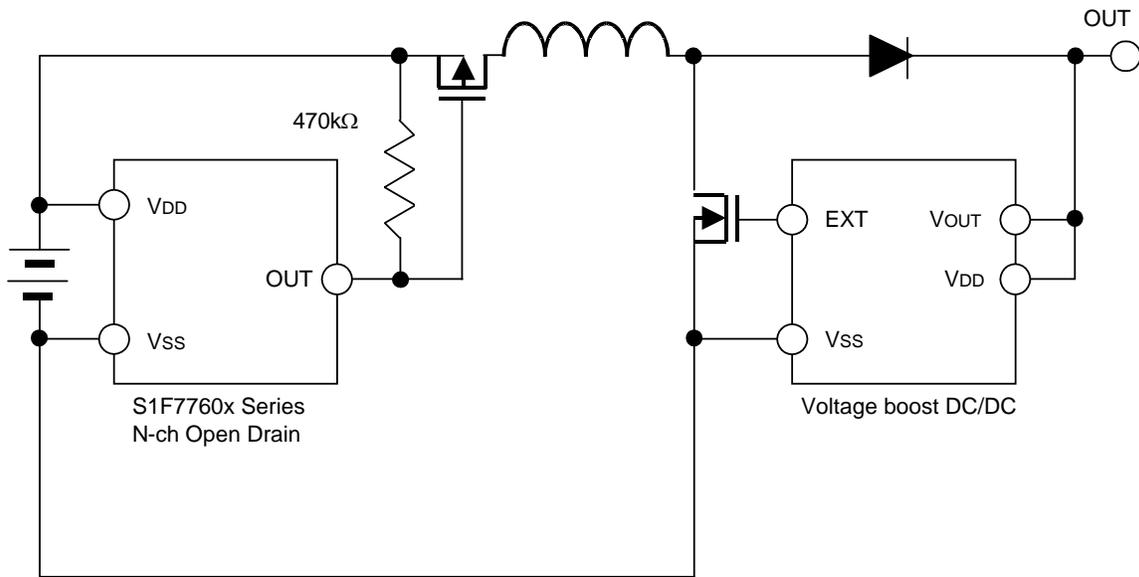


Fig.11.1 Example of Circuit 1

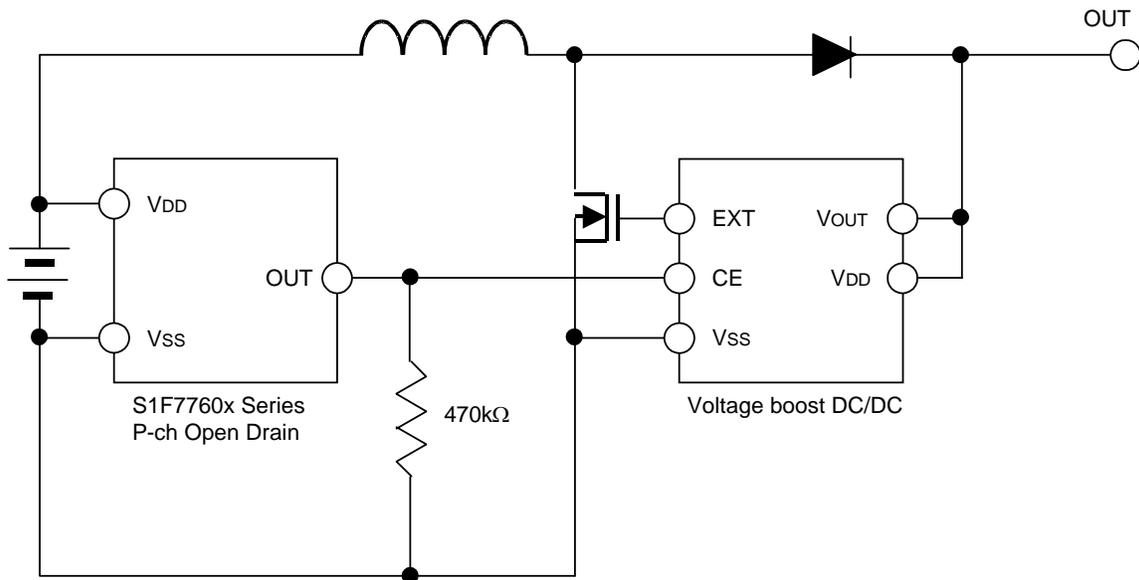


Fig.11.2 Example of Circuit 2

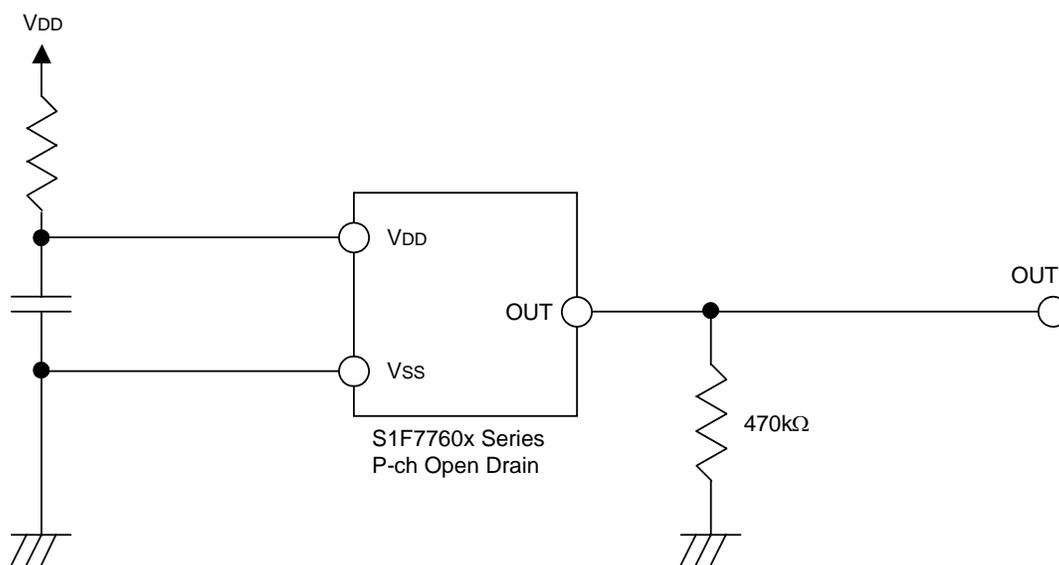


Fig.11.3 Example of circuit 3 (CR timer circuit)

AMERICA

EPSON ELECTRONICS AMERICA, INC.

HEADQUARTERS

150 River Oaks Parkway
San Jose, CA 95134, U.S.A.
Phone: +1-408-922-0200 FAX: +1-408-922-0238

SALES OFFICES

West

1960 E. Grand Avenue
El Segundo, CA 90245, U.S.A.
Phone: +1-310-955-5300 FAX: +1-310-955-5400

Central

101 Virginia Street, Suite 290
Crystal Lake, IL 60014, U.S.A.
Phone: +1-815-455-7630 FAX: +1-815-455-7633

Northeast

301 Edgewater Place, Suite 120
Wakefield, MA 01880, U.S.A.
Phone: +1-781-246-3600 FAX: +1-781-246-5443

Southeast

3010 Royal Blvd. South, Suite 170
Alpharetta, GA 30005, U.S.A.
Phone: +1-877-EEA-0020 FAX: +1-770-777-2637

EUROPE

EPSON EUROPE ELECTRONICS GmbH

HEADQUARTERS

Riesstrasse 15
80992 Munich, GERMANY
Phone: +49-(0)89-14005-0 FAX: +49-(0)89-14005-110

DÜSSELDORF BRANCH OFFICE

Altstadtstrasse 176
51379 Leverkusen, GERMANY
Phone: +49-(0)2171-5045-0 FAX: +49-(0)2171-5045-10

UK & IRELAND BRANCH OFFICE

Unit 2.4, Doncastle House, Doncastle Road
Bracknell, Berkshire RG12 8PE, ENGLAND
Phone: +44-(0)1344-381700 FAX: +44-(0)1344-381701

FRENCH BRANCH OFFICE

1 Avenue de l'Atlantique, LP 915 Les Conquerants
Z.A. de Courtaboeuf 2, F-91976 Les Ulis Cedex, FRANCE
Phone: +33-(0)1-64862350 FAX: +33-(0)1-64862355

BARCELONA BRANCH OFFICE

Barcelona Design Center

Edificio Testa, Avda. Alcalde Barrils num. 64-68
E-08190 Sant Cugat del Vallès, SPAIN
Phone: +34-93-544-2490 FAX: +34-93-544-2491

Scotland Design Center

Integration House, The Alba Campus
Livingston West Lothian, EH54 7EG, SCOTLAND
Phone: +44-1506-605040 FAX: +44-1506-605041

ASIA

EPSON (CHINA) CO., LTD.

23F, Beijing Silver Tower 2# North RD DongSanHuan
ChaoYang District, Beijing, CHINA
Phone: 64106655 FAX: 64107319

SHANGHAI BRANCH

7F, High-Tech Bldg., 900, Yishan Road,
Shanghai 200233, CHINA
Phone: 86-21-5423-5577 FAX: 86-21-5423-4677

EPSON HONG KONG LTD.

20/F., Harbour Centre, 25 Harbour Road
Wanchai, Hong Kong
Phone: +852-2585-4600 FAX: +852-2827-4346
Telex: 65542 EPSCO HX

EPSON TAIWAN TECHNOLOGY & TRADING LTD.

14F, No. 7, Song Ren Road,
Taipei 110
Phone: 02-8786-6688 FAX: 02-8786-6660

HSINCHU OFFICE

13F-3, No. 295, Kuang-Fu Road, Sec. 2
HsinChu 300
Phone: 03-573-9900 FAX: 03-573-9169

EPSON SINGAPORE PTE., LTD.

No. 1 Temasek Avenue, #36-00
Millenia Tower, SINGAPORE 039192
Phone: +65-6337-7911 FAX: +65-6334-2716

SEIKO EPSON CORPORATION

KOREA OFFICE

50F, KLI 63 Bldg., 60 Yoido-dong
Youngdeungpo-Ku, Seoul, 150-763, KOREA
Phone: 02-784-6027 FAX: 02-767-3677

GUMI OFFICE

6F, Good Morning Securities Bldg., 56 Songjeong-Dong,
Gumi-City, Seoul, 730-090, KOREA
Phone: 054-454-6027 FAX: 054-454-6093

SEIKO EPSON CORPORATION

ELECTRONIC DEVICES MARKETING DIVISION

IC Marketing Department

IC Marketing & Engineering Group

421-8, Hino, Hino-shi, Tokyo 191-8501, JAPAN
Phone: +81-(0)42-587-5816 FAX: +81-(0)42-587-5624

ED International Marketing Department

421-8, Hino, Hino-shi, Tokyo 191-8501, JAPAN
Phone: +81-(0)42-587-5814 FAX: +81-(0)42-587-5117



In pursuit of “**Saving**” **Technology**, Epson electronic devices.
Our lineup of semiconductors, displays and quartz devices
assists in creating the products of our customers’ dreams.

Epson IS energy savings.

SEIKO EPSON CORPORATION
ELECTRONIC DEVICES MARKETING DIVISION

- EPSON Electronic Devices Website

<http://www.epsondevice.com/>