

MC2316G Series

Specifications:

| Parameters | Units | MC2316GA01AW | MC2316GA03AW | MC2316GA06AW |
|------------------------------------|-------|--------------|--------------|--------------|
| ▶ Min Sound Pressure Level at 30cm | dBA | 70 | 70 | 70 |
| Rated Voltage | Vdc | 1.5 | 3 | 6 |
| Operating Voltage | Vdc | 1 - 3 | 2 - 4 | 4 - 8 |
| Resonance Frequency | Hz | 400 ± 50 | 400 ± 50 | 400 ± 50 |
| ▶ Max Operating Current | mA | 20 | 20 | 25 |
| Operating Temperature | °C | -20 - +65 | -20 - +65 | -20 - +65 |
| Case Material | - | ABS | ABS | ABS |
| Weight | g | 8 | 8 | 8 |




Specifications:

| Parameters | Units | MC2316GA09AW | MC2316GA12AW | MC2316GA24AW |
|------------------------------------|-------|--------------|--------------|--------------|
| ▶ Min Sound Pressure Level at 30cm | dBA | 75 | 75 | 75 |
| Rated Voltage | Vdc | 9 | 12 | 24 |
| Operating Voltage | Vdc | 6 - 12 | 9 - 15 | 15 - 27 |
| Resonance Frequency | Hz | 400 ± 50 | 400 ± 50 | 400 ± 50 |
| ▶ Max Operating Current | mA | 25 | 30 | 30 |
| Operating Temperature | °C | -20 - +65 | -20 - +65 | -20 - +65 |
| Case Material | - | ABS | ABS | ABS |
| Weight | g | 8 | 8 | 8 |

▶ Value applying rated voltage

Unit: mm • Tolerance: ±0.5mm

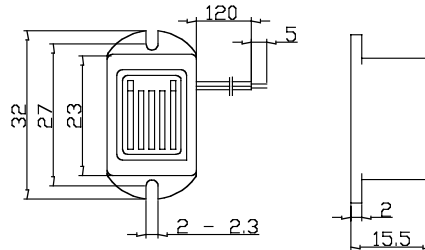

MC2320 Series

Specifications:

| Parameters | Units | MC2320A110HP | MC2320A230HP |
|------------------------------------|-------|--------------|--------------|
| ▶ Min Sound Pressure Level at 10cm | dBA | 75 | 78 |
| Rated Voltage | Vac | 110 | 230 |
| Operating Voltage | Vac | 70 - 150 | 160 - 260 |
| Resonance Frequency | Hz | - | - |
| ▶ Max Operating Current | mA | 25 | 30 |
| Operating Temperature | °C | -20 - +60 | -20 - +60 |
| Case Material | - | PBT | PBT |
| Weight | g | 20 | 20 |



▶ Value applying rated voltage

Unit: mm • Tolerance: ±0.5mm

