

# Surface Mount Frequency Mixer

Level 10 (LO Power +10 dBm) 40 to 2500 MHz

## SYM-25DLHW+ SYM-25DLHW



CASE STYLE: TTT167  
PRICE: \$7.95 ea. QTY (10-49)

+ RoHS compliant in accordance  
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site  
for RoHS Compliance methodologies and qualifications.

### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

### Pin Connections

LO	2
RF	1
IF	3
GROUND	4,5,6


### Features

- wide bandwidth, 40 to 2500 MHz
- low conversion loss, 6.3 dB typ.
- good L-R isolation, 40 dB typ.
- IF response to DC

### Applications

- cellular
- PCS
- satellite distribution


### Outline Drawing

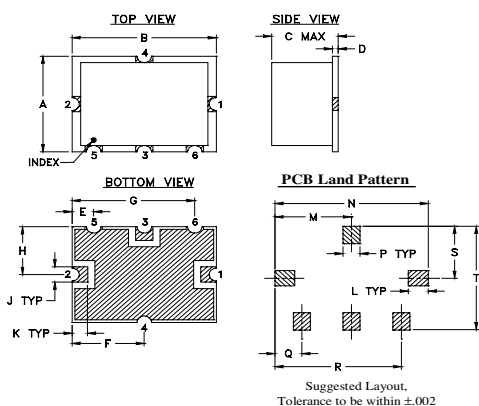

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K
.38	.50	.23	.020	.075	.250	.425	.187	.050	.050
9.65	12.70	5.84	0.51	1.91	6.35	10.80	4.75	1.27	1.27
L	M	N	P	Q	R	S	T	wt.	
.070	.270	.540	.060	.095	.445	.208	.415	grams	
1.78	6.86	13.72	1.52	2.41	11.30	5.28	10.54	0.8	

### Demo Board MCL P/N: TB-12 Suggested PCB Layout (PL-079)

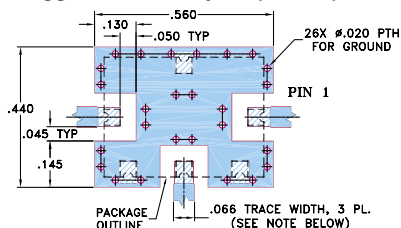

- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. GROUND PAD SHALL BE FREE OF SOLDER MASK IF REQUIRED FOR SOLDERING.  
3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER), SEE NOTE 2.  
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Electrical Specifications


FREQUENCY (MHz)	CONVERSION LOSS* (dB)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			IP3 at center band (dBm)						
		L	M	U	L	M	U							
40-2500	DC-1000*	48	28	40	25	38	22	36	25	33	25	39	21	22

1 dB COMP: +5 dBm typ.  
\*Conversion loss increases up to 6 dB higher as IF frequency decreases from 5MHz to DC.  
L = low range [ $f_L$  to  $10 f_L$ ]  
M = mid band [ $2 f_L$  to  $f_U/2$ ]  
U = upper range [ $f_U/2$  to  $f_U$ ]

### Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm
30.26	60.26	6.28	60.74	38.48	1.12	1.57
110.92	140.92	6.34	62.91	37.88	1.15	1.50
211.74	241.74	6.35	59.37	37.88	1.20	1.48
312.56	342.56	6.41	55.65	38.03	1.27	1.44
413.38	443.38	6.40	53.27	38.02	1.35	1.39
514.20	544.20	6.43	51.22	37.46	1.42	1.34
615.02	645.02	6.45	49.78	36.59	1.51	1.29
816.66	846.66	6.57	44.86	34.93	1.64	1.18
1018.30	1048.30	6.70	41.69	34.07	1.77	1.08
1240.10	1270.10	6.85	38.25	33.62	1.80	1.09
1401.41	1431.41	7.07	37.62	34.60	1.78	1.22
1502.23	1532.23	7.21	38.08	36.08	1.78	1.31
1643.38	1673.38	7.45	39.08	38.33	1.80	1.43
1804.69	1834.69	7.80	40.55	46.51	1.81	1.57
1905.51	1935.51	8.02	40.98	50.46	1.81	1.65
2006.33	2036.33	8.24	40.99	42.85	1.78	1.74
2207.97	2237.97	8.36	38.87	34.59	1.65	1.89
2308.79	2338.79	8.33	37.86	32.15	1.61	1.96
2409.61	2439.61	8.32	36.39	30.29	1.57	2.00
2510.43	2540.43	8.28	34.69	28.65	1.56	2.04

### Electrical Schematic

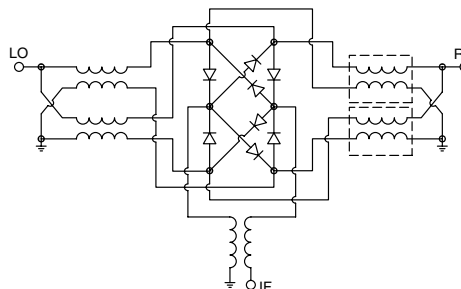

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

REV. D  
M112207  
SYM-25DLHW  
EDR-5073  
DJ/TD/AM  
070815  
Page 1 of 2

# SYM-25DLHW+ SYM-25DLHW

## Performance Charts

