



TF3000 Series

Thick Film Resistor Networks

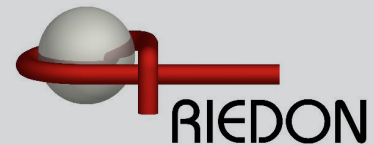

- Resistances from 25 Ohm to 10MOhms
- Power Rating to 1.35W
- Resistance Tolerances to $\pm 1\%$
- Temperature Coefficients to $\pm 100\text{ppm/K}$
- TCR Matching to $\pm 5\text{ppm/K}$
- Up to 9 Resistors

SPECIFICATIONS

Type	Wattage Rating (Watts @ 40°C)	L (MAX)	# of Pins	# of Resistors
TF3006A	0.75	0.590 [15.0]	6	3
TF3008A	1.0	0.780 [19.8]	8	4
TF3010A	1.25	0.996 [25.3]	10	5
TF3006B	0.75	0.590 [15.0]	6	5
TF3007B	0.90	0.685 [17.4]	7	6
TF3008B	1.05	0.780 [19.8]	8	7
TF3009B	1.20	0.878 [22.3]	9	8
TF3010B	1.35	0.996 [25.3]	10	9


Specification	Value
Resistance Range	25 Ohm to 10MOhms
Tolerances	$\pm 1\%$: $100\Omega \geq R \geq 1M\Omega$ $\pm 2\%$: $25\Omega \geq R \geq 5M\Omega$ $\pm 5\%$: $25\Omega \geq R \geq 10M\Omega$
Temperature Coefficient	$\pm 100\text{ppm/K}$
TCR Matching	to $\pm 5\text{ppm/K}$
Insulation Resistance	$> 50000\text{ MOhms}$
Temperature Range	-25°C to $+125^\circ\text{C}$
Voltage Coefficient	$5 \times 10^{-6} / V_{(\text{MAX})}$

Ordering Information


TF30 (# of Pins) (Circuit Type - A or B) - Resistance - Tolerance - TCR

Example: TF3008B 10 kOhms 1% 100ppm


SPECIFICATIONS

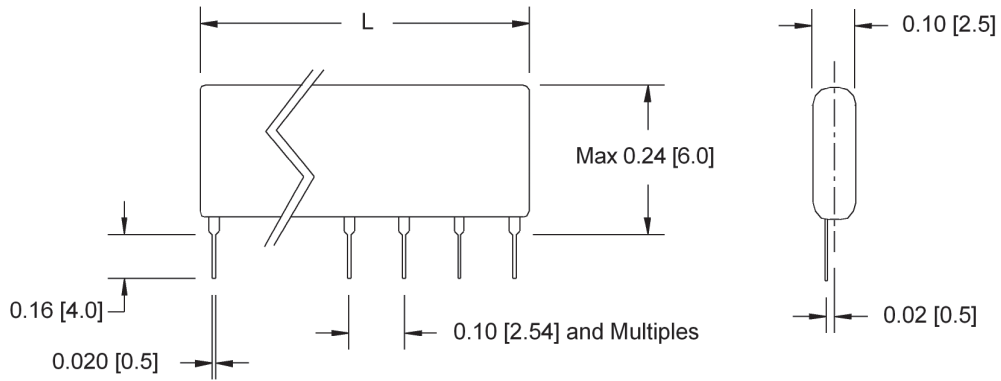

Isolated Circuit (A)

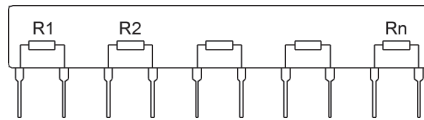

Common Circuit (B)



Power Derating Curve

