


## FEATURES

- Precision fixed operating frequency (70KHz)
- Pulse by pulse over current limiting
- Over load protection
- Internal thermal shutdown function
- Under voltage lockout
- Internal high voltage sense FET
- Low start up current ( $\leq 0.4\text{mA}$ )

## PRODUCT SUMMARY

Part Number	BVdss	Rds(on)	ID
KA1M0380	800V	5 $\Omega$	3A

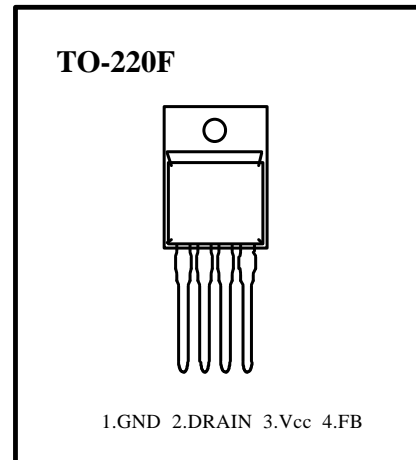

## ABSOLUTE MAXIMUM RATINGS ( Ta = 25 °C , unless otherwise specified )

Characteristics	Symbol	Value	Unit
Drain - Source(GND) Voltage (1)	V <sub>DSS</sub>	800	V
Drain - Gate Voltage (R <sub>s</sub> = 1M $\Omega$ ) (1)	V <sub>DGR</sub>	800	V
Gate - Source(GND) Voltage	V <sub>GS</sub>	$\pm 30$	V
Rise Time (2)	T <sub>r</sub>	95	ns
Fall Time (2)	T <sub>f</sub>	60	ns
Drain-Source Off State Leakage Current ( V <sub>ds</sub> = 0V, V <sub>gs</sub> = 0V )	I <sub>DSS</sub>	250	$\mu\text{A}$
Continuous Drain Current (T <sub>c</sub> = 25°C)	I <sub>D</sub>	3.0	A <sub>DC</sub>
Supply Voltage	V <sub>CC</sub>	30	V
Analog Input Voltage Range	V <sub>FB</sub>	-0.3 ~ V <sub>SD</sub>	V
Total Power Dissipation	P <sub>D</sub> ( wt H/S)	20	W
	Derating	0.28	W/ °C
Operating Temperature	T <sub>OPR</sub>	- 25 ~ + 85	°C
Storage Temperature	T <sub>STG</sub>	- 55 ~ + 150	°C

**Notes:** (1) T<sub>J</sub> = 25°C to 150°C

(2) V<sub>DD</sub> = 400V, I<sub>D</sub> = Max. Rating, V<sub>GS</sub> = 10V

**ELECTRICAL CHARACTERISTICS ( Control part )**

( Ta = 25°C unless otherwise specified )

Symbol	Characteristics	Min	Typ	Max	Unit	Test Conditions
<b>REFERENCE SECTION</b>						
Vref	Output Voltage	4.80	5.00	5.20	V	Ta = 25 °C
Vref/ ΔT	Temperature Stability	-	0.3	0.6	mV/ °C	-25°C ≤ Ta ≤ +85°C Note1
<b>OSCILLATOR SECTION</b>						
FOSC	Initial Accuracy	62	67	72	KHz	Ta = 25 °C
ΔF / ΔT	Frequency Change with Temperature		±5	±10	%	-25°C ≤ Ta ≤ +85°C
<b>PWM SECTION</b>						
DMAX	Maximum Duty Cycle	62	67	72	%	
<b>FEEDBACK SECTION</b>						
IFB	Feedback Source Current		1		mA	Ta = 25 °C , Vfb = 0
Idelay	Shutdown Delay Current		5		uA	5 V ≤ Vfb ≤ VSD
<b>OVER CURRENT PROTECTION SECTION</b>						
IL(MAX)	Over Current Protection	1.5	1.8	2.2	A	Max. Inductor Current
<b>UVLO SECTION</b>						
Vth(H)	Start Threshold Voltage	14	15	16	V	
Vth(L)	Minimum Operating Voltage	9	10	11	V	After turn on

**ELECTRICAL CHARACTERISTICS ( Continued)**

( Ta = 25°C unless otherwise specified )

Symbol	Characteristics	Min	Typ	Max	Unit	Test Conditions
<b>TOTAL STANDBY CURRENT SECTION</b>						
I <sub>ST</sub>	Start up Current		0.25	0.4	mA	V <sub>CC</sub> = 14V
I <sub>OPR</sub>	Operating Supply Current ( control part only )		15	18	mA	Ta = 25 °C ,
V <sub>Z</sub>	V <sub>CC</sub> Zener Voltage	30	32.5	35	V	I <sub>CC</sub> = 20mA
<b>SHUTDOWN SECTION</b>						
V <sub>SD</sub>	Shutdown Feedback Voltage	7	7.6	8.2	V	
T <sub>SD</sub>	ThermalShutdownTemperature(T <sub>j</sub> )		150		°C	Note 1

- Notes:** (1) These parameters, although guaranteed, are not 100% tested in production  
(2) In output section, the design target is the maximum current after current clamping  
(3) These parameters, although guaranteed, are tested in EDS(wafer test) process.

## TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	ISOPLANAR™	UHC™
CoolFET™	MICROWIRE™	VCX™
CROSSVOLT™	POP™	
E <sup>2</sup> CMOS™	PowerTrench™	
FACT™	QST™	
FACT Quiet Series™	Quiet Series™	
FAST®	SuperSOT™-3	
FASTr™	SuperSOT™-6	
GTO™	SuperSOT™-8	
HiSeC™	TinyLogic™	

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.