


# BB741S

## Tuner Diodes

### SOD-323

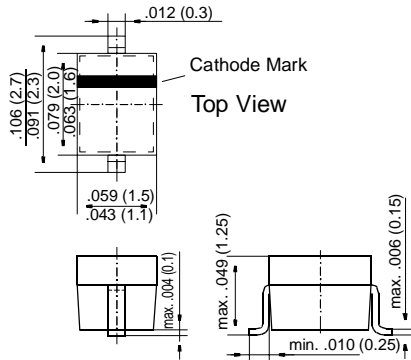

Dimensions in inches and (millimeters)

### FEATURES

- ◆ Silicon epitaxial planar capacitance diodes with very wide effective capacitance variation for tuning the VHF range and hyperband in television tuners.
- ◆ These diodes are available as singles or as matched sets of two or more units according to the tracking condition described in the table of characteristics.



### MECHANICAL DATA

**Case:** SOD-323 Plastic Package  
**Weight:** approx. 0.004 g

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified

	Symbol	Value	Unit
Reverse Voltage	$V_R$	32	V
Ambient Temperature	$T_{amb}$	125	°C
Storage Temperature Range	$T_S$	-55 to +125	°C

# BB741S

## ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified

	Symbol	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage at $I_R = 100 \mu\text{A}$	$V_{(BR)R}$	32	–	–	V
Leakage Current at $V_R = 30 \text{ V}$	$I_R$	–	–	20	nA
Capacitance, $f = 1 \text{ MHz}$ at $V_R = 28 \text{ V}$ at $V_R = 1 \text{ V}$	$C_{\text{tot}}$ $C_{\text{tot}}$	2.65 62.0	– –	2.88 76.0	pF pF
Effective Capacitance Ratio, $f = 1 \text{ MHz}$ at $V_R = 1 \text{ to } 28 \text{ V}$	$\frac{C_{\text{tot}}(1 \text{ V})}{C_{\text{tot}}(28 \text{ V})}$	22.0	–	–	–
Series Resistance at $f = 300 \text{ MHz}$ , $C_{\text{tot}} = 25 \text{ pF}$	$r_s$	–	1.2	–	$\Omega$
Series Inductance	$L_s$	–	2.5	–	nH
For any two of six consecutive diodes in the carrier tape, the maximum capacitance deviation in the reverse bias voltage of $V_R = 0.5 \text{ to } 28 \text{ V}$ is max. 3.0%					