


20 x 2 Character LCD

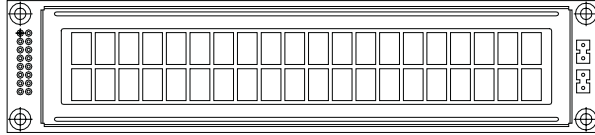

FEATURES

- 5 x 8 dots includes cursor
- Built-in controller (KS 0066 or Equivalent)
- + 5V power supply (Also available for + 3V)
- 1/16 duty cycle
- B/L to be driven by pin 1, pin 2 or pin 15, pin 16 or A and K (LED)
- N.V. optional for + 3V power supply

| MECHANICAL DATA | | |
|------------------|----------------|------|
| ITEM | STANDARD VALUE | UNIT |
| Module Dimension | 180.0 x 40.0 | mm |
| Viewing Area | 149.0 x 23.0 | mm |
| Mounting Hole | 172.0 x 32.0 | mm |
| Character Size | 6.0 x 9.66 | mm |

| ABSOLUTE MAXIMUM RATING | | | | | |
|-------------------------|---------|----------------|------|------|------|
| ITEM | SYMBOL | STANDARD VALUE | | | UNIT |
| | | MIN. | TYP. | MAX. | |
| Power Supply | VDD-VSS | - 0.3 | - | 7.0 | V |
| Input Voltage | VI | - 0.3 | - | VDD | V |


NOTE: VSS = 0 Volt, VDD = 5.0 Volt

| ELECTRICAL SPECIFICATIONS | | | | | | |
|--|----------|--------------------|----------------|------|------|------|
| ITEM | SYMBOL | CONDITION | STANDARD VALUE | | | UNIT |
| | | | MIN. | TYP. | MAX. | |
| Input Voltage | VDD | VDD = + 5V | 4.7 | 5.0 | 5.3 | V |
| | | VDD = + 3V | 2.7 | 3.0 | 5.3 | V |
| Supply Current | IDD | VDD = + 5V | - | 1.5 | 1.8 | mA |
| Recommended LC Driving Voltage for Normal Temp. Version Module | VDD - V0 | - 20 °C | 5.0 | 5.1 | 5.7 | V |
| | | 0°C | 4.6 | 4.8 | 5.2 | |
| | | 25°C | 4.1 | 4.5 | 4.7 | |
| | | 50°C | 3.9 | 4.2 | 4.5 | |
| | | 70°C | - | - | - | |
| LED Forward Voltage | VF | 25°C | - | 4.2 | 4.6 | V |
| LED Forward Current | IF | 25°C | - | 360 | 720 | mA |
| EL Power Supply Current | IEL | Vel = 110VAC:400Hz | - | - | 5.0 | mA |

| DISPLAY CHARACTER ADDRESS CODE: | | | | | | | | | | | | | | | | | | | | |
|---------------------------------|----|----|---|---|---|---|---|---|---|----|----|----|----|---|---|----|--|--|--|--|
| Display Position | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | - | - | 20 | | | | |
| DD RAM Address | 00 | 01 | | | | | | | | | | | | | | 13 | | | | |
| DD RAM Address | 40 | 41 | | | | | | | | | | | | | | 53 | | | | |

| PIN NUMBER | SYMBOL | FUNCTION |
|------------|--------|--|
| 1 | Vss | GND |
| 2 | Vdd | + 3V or + 5V |
| 3 | Vo | Contrast Adjustment |
| 4 | RS | H/L Register Select Signal |
| 5 | R/W | H/L Read/Write Signal |
| 6 | E | H → L Enable Signal |
| 7 | DB0 | H/L Data Bus Line |
| 8 | DB1 | H/L Data Bus Line |
| 9 | DB2 | H/L Data Bus Line |
| 10 | DB3 | H/L Data Bus Line |
| 11 | DB4 | H/L Data Bus Line |
| 12 | DB5 | H/L Data Bus Line |
| 13 | DB6 | H/L Data Bus Line |
| 14 | DB7 | H/L Data Bus Line |
| 15 | A/Vee | + 4.2V for LED/Negative Voltage Output |
| 16 | K | Power Supply for B/L (0V) |

DIMENSIONS in millimeters

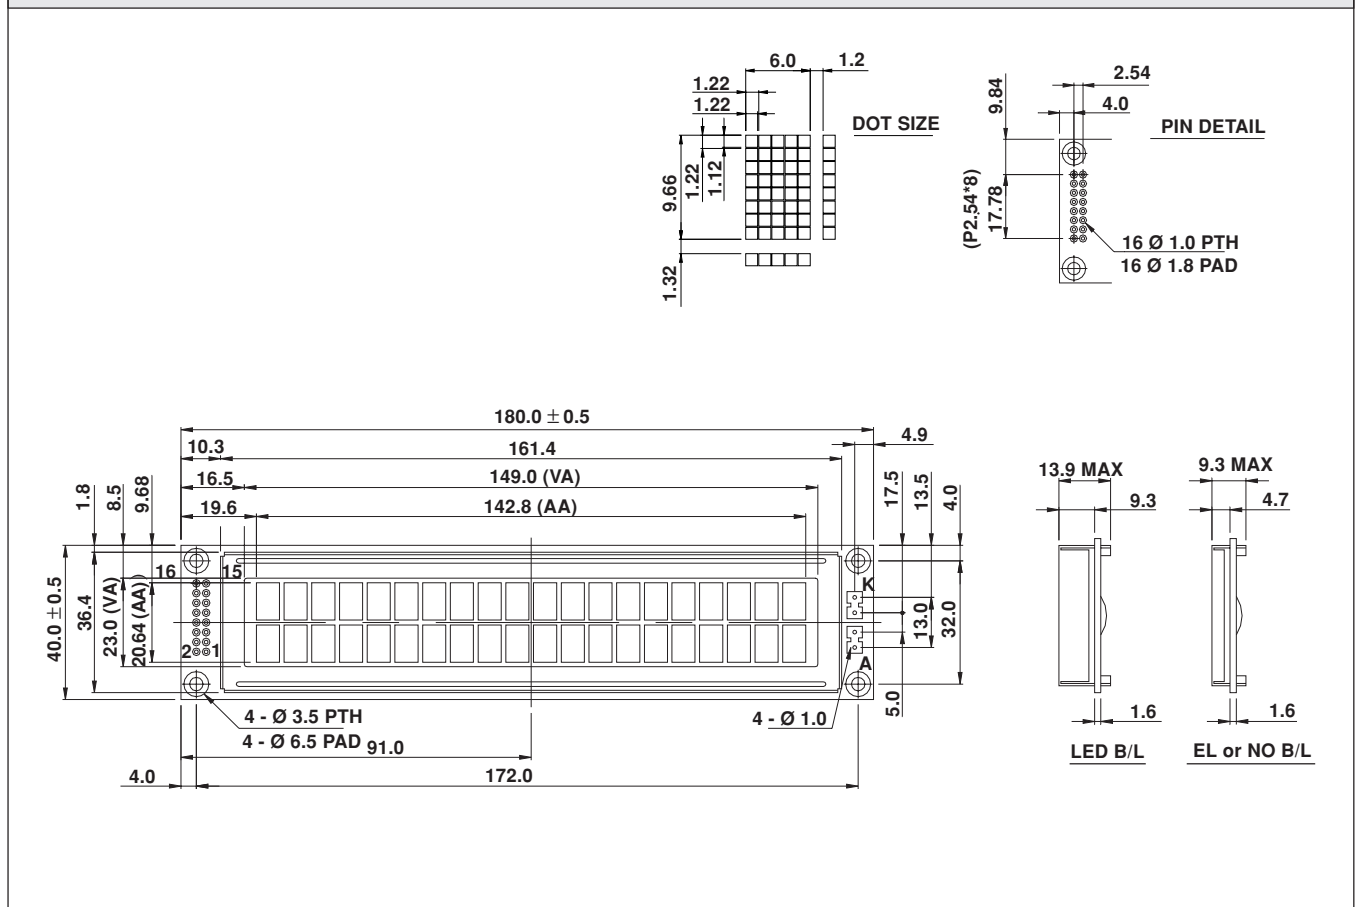



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.