

Wall Industries, Inc.

MPQ48S1.8-36R

36 W DC-DC Converter
36-75 Vdc Input
1.8 Vdc Output at 20 A
Quarter-Brick Package



Features:

- **Over 88% Efficient at Full Load**
- **Fast Transient Response**
- **Operation to No Load**
- **Output Trim +/-10%**
- **Remote ON/OFF (Active Low)**
- **Remote Sense Compensation**
- **Low Output Ripple**
- **Fixed Switching Frequency**
- **Output Over Current Protection**
- **Output Short Circuit Protection**
- **Over Temperature Protection**
- **1500 V Isolation**
- **100% Burn In**
- **Heatsink Available**

Description:

The MPQ series is a high density, low voltage input quarter brick converter that incorporates the desired features required in today's demanding applications while maintaining low cost. When performance, reliability, and low cost are needed, the MPQ series delivers.

Technical Specifications		Model No.		MPQ48S1.8-36R			
All specifications are based on 25C, Nominal Line and Full Load unless otherwise noted. We reserve the right to change specifications based on technological advances.							
SPECIFICATION		Related condition		MIN	NOM	MAX	Unit Measured
INPUT							
Turn on at					35		Volt DC
Turn off at					34		Volt DC
Input Over voltage Shutdown							
Turn off at					n/a		Volt DC
Turn on at					n/a		Volt DC
Operating Voltage Range		Rated Input Voltage		36	48	75	Volt DC
Maximum Input Current		Low Line 100% load			1.2		A
No Load Input Current					34		mA
Input Current under "LOGIC OFF"					1		mA
Inrush Current Transient Rating					1		A ² Sec
Reflected Ripple Current		12 uH / 33 uF input filter			5.2		mA
OUTPUT							
Output Voltage Set point				1.782	1.8	1.818	Volt DC
Output Voltage Regulation							
Over Load					± 0.2		%
Over Line					± 0.2		%
Over Temperature					0.02		% / °C
Output Voltage Ripple and Noise							
Basic Ripple					60	100	mV
Spikes P-P					60	100	mV
Output Current Ranges		Rated Output Current		0		20	A
Output Current Limit		Self Resetting		22	26	30	A
Short Term Output Current Surge							A/sec
DYNAMIC CHARACTERISTICS							
Input Voltage Ripple Rejection		120 Hz			60		dB
Output Transient and Load Changes							
Load step / Δ V		X	50 to 75%		80		mV
Load step / Δ V		X	75 to 50%		75		mV
Recovery Time		To within 1% Rated Vo			50		μsec
Turn on Delay		From Vin(nom) to 90% Vout (nom)			25		msec
Overshoot of Output Voltage		Full Load Resistive			0		%
EFFICIENCY							
@ 100% load					86		%
@ 75% load					86		%
@ 50% load					85		%
@ 25% load					79		%
TEMPERATURE CONSIDERATIONS							
Thermal Resistance							
Normal Convection		Rθc-a					°C/Watt
100 lfm							°C/Watt
200 lfm							°C/Watt
300 lfm							°C/Watt
400 lfm							°C/Watt
Heatsink Considerations		Available, Contact Factory					
General Technical Data							
Switching Frequency		Fixed			330		KHz
Remote ON OFF Control		Active HIGH or LOW					High/Low TTL
Trimmability				1.62		1.98	Volt DC
Over Temperature Shutdown		PCB Temperature				125	°C
MTBF							
		Bellcore TR-332			1.81 E6		Hours

Note: Positive Remote ON/OFF control is standard. To order negative logic Remote ON/OFF control add the suffix "R" to the part number.

Table 1: Pin Assignments


Pin #	Pin Name	Function	Comments
1	+Vin	Positive Input	
2	Enable	Remote On/Off	If not used, leave open for standard unit, short to -Vin on 'R' units.
3	-Vin	Negative Input	
4	+Vout	Negative Output	
5	+SENSE	Negative Remote Sense	If not used, short to -Vo.
6	TRIM	Output Voltage Trim	If not used, leave open.
7	-SENSE	Positive Remote Sense	If not used, short to +Vo.
8	-Vout	Positive Output	

Figure 1: Mechanical Dimensions

Unit: inches [mm]

(Open Frame - no suffix)

PIN DESIGNATION	PIN Ø
1 +Vin	Ø.062 [1.57]
2 ON/OFF	Ø.040 [1.02]
3 -Vin	Ø.062 [1.57]
4 +Vout	Ø.062 [1.57]
5 +SENSE	Ø.040 [1.02]
6 TRIM	Ø.040 [1.02]
7 -SENSE	Ø.040 [1.02]
8 -Vout	Ø.062 [1.57]

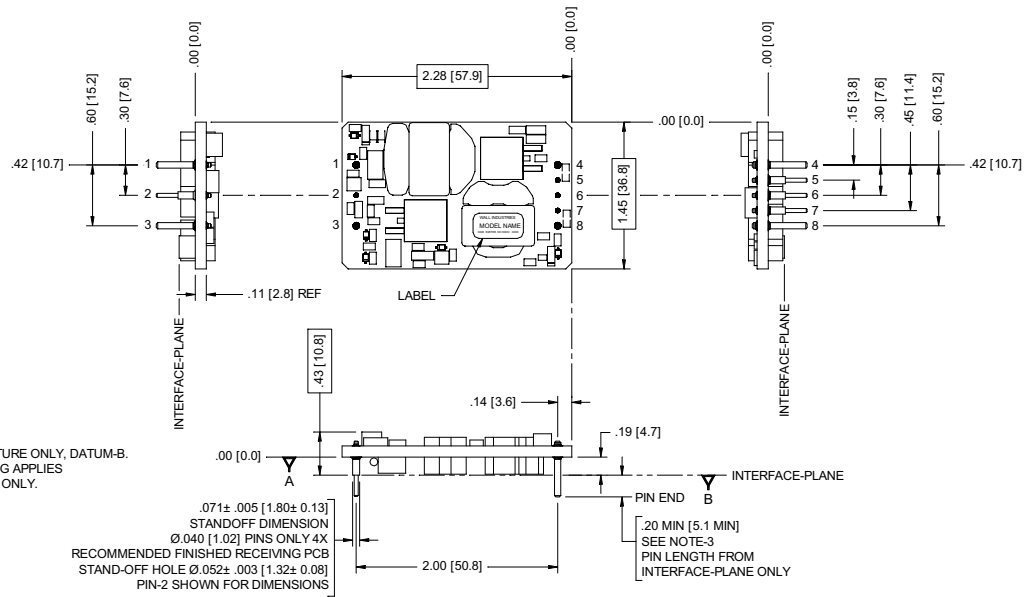


NOTES:

- PIN TO PIN TOLERANCE: ± .010 [± 0.25] MEASURED AT STANDOFF FEATURE ONLY, DATUM-B.
- PIN DIAMETER TOLERANCE OF: ± .005 [± 0.13] MEASUREMENT READING APPLIES TO AREA FROM INTERFACE-PLANE SURFACE DATUM-B TO END OF PIN ONLY.
- UNLESS OTHERWISE SPECIFIED.


UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [XX] ARE IN MILLIMETERS APPLIED TOLERANCES: ANGLES: ± 1° .XX± .02 [0.5] .XXX± .01 [0.25] DO NOT SCALE DRAWING INTERPRET DIMENSION AND TOLERANCE PER ASME Y14.5M - 1994

THIRD ANGLE PROJECTION



PIN DESIGNATION	PIN Ø
1 +Vin	Ø.062 [1.57]
2 ON/OFF	Ø.040 [1.02]
3 -Vin	Ø.062 [1.57]
4 +Vout	Ø.062 [1.57]
5 +SENSE	Ø.040 [1.02]
6 TRIM	Ø.040 [1.02]
7 -SENSE	Ø.040 [1.02]
8 -Vout	Ø.062 [1.57]

(Cased Option - "C" suffix)

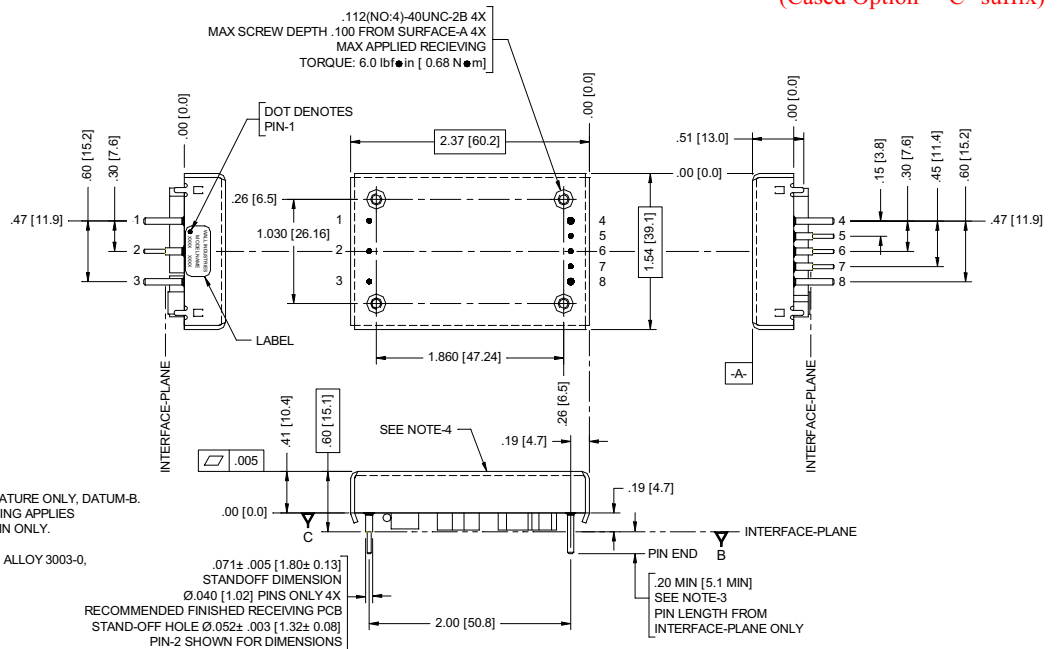





NOTES:


- PIN TO PIN TOLERANCE: ± .010 [± 0.25] MEASURED AT STANDOFF FEATURE ONLY, DATUM-B.
- PIN DIAMETER TOLERANCE OF: ± .005 [± 0.13] MEASUREMENT READING APPLIES TO AREA FROM INTERFACE-PLANE SURFACE DATUM-C TO END OF PIN ONLY.
- UNLESS OTHERWISE SPECIFIED.
- THERMAL TRANSFER PLATE MATERIAL: .040 [1.02] THICK, ALUMINUM ALLOY 3003-0, PER: QQA 250/2 WITH BLACK SOFT SULFURIC ANODIZE FINISH.

Mechanical Dimensions (Heatsink Option - "HS" suffix)


Unit: inches [mm]

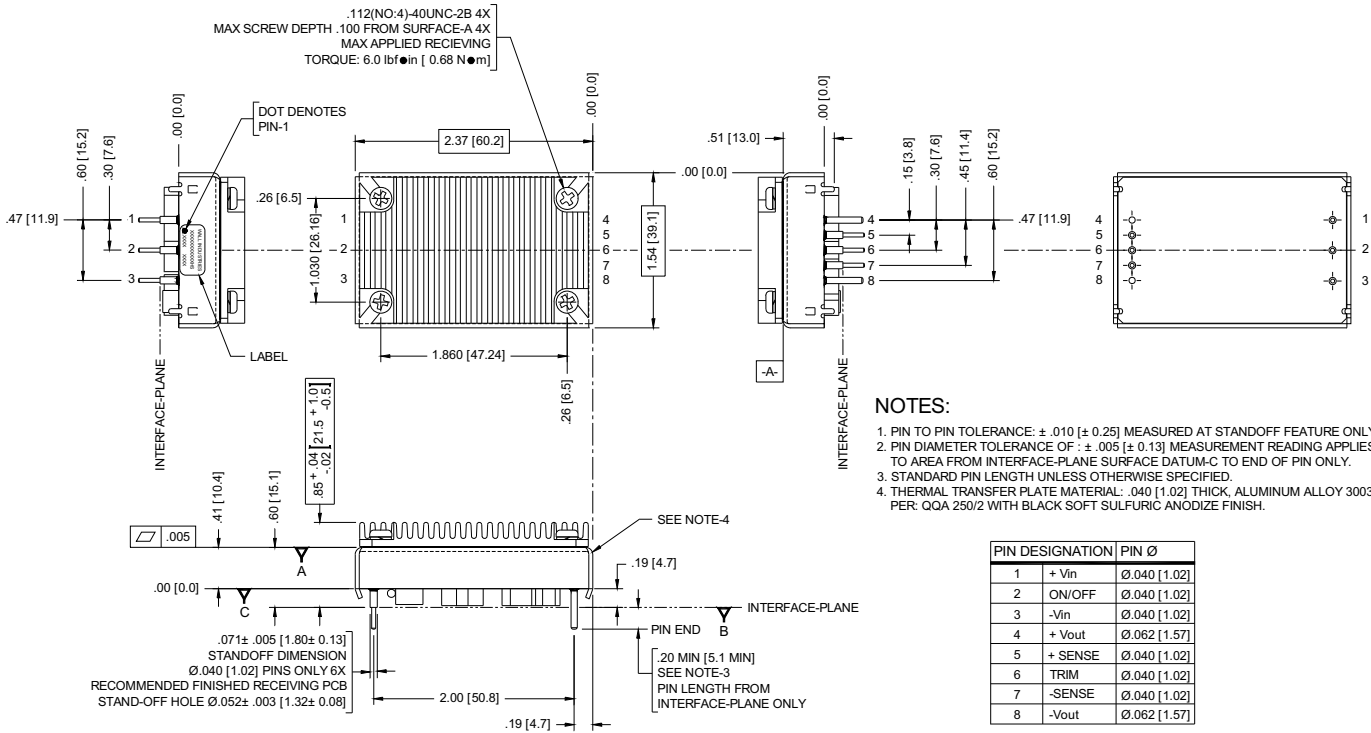

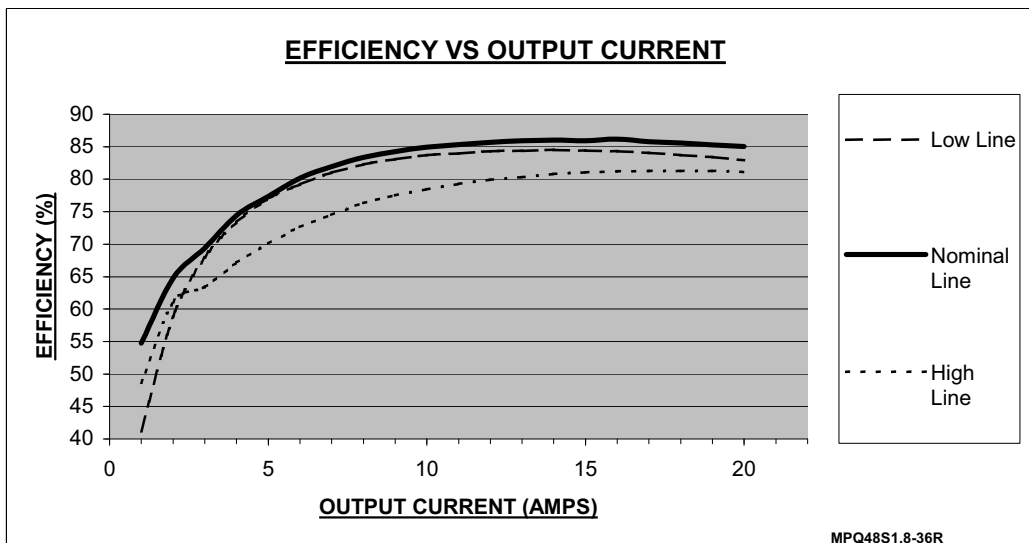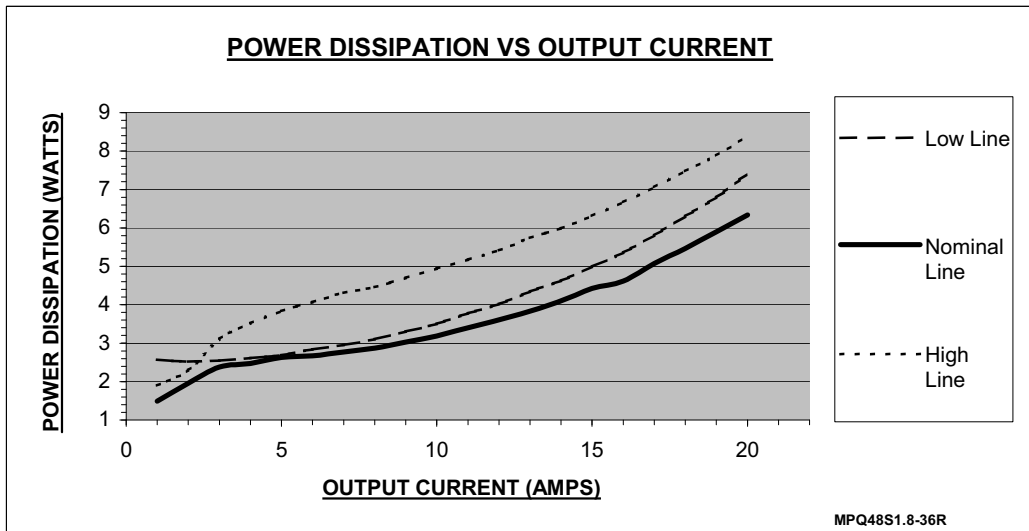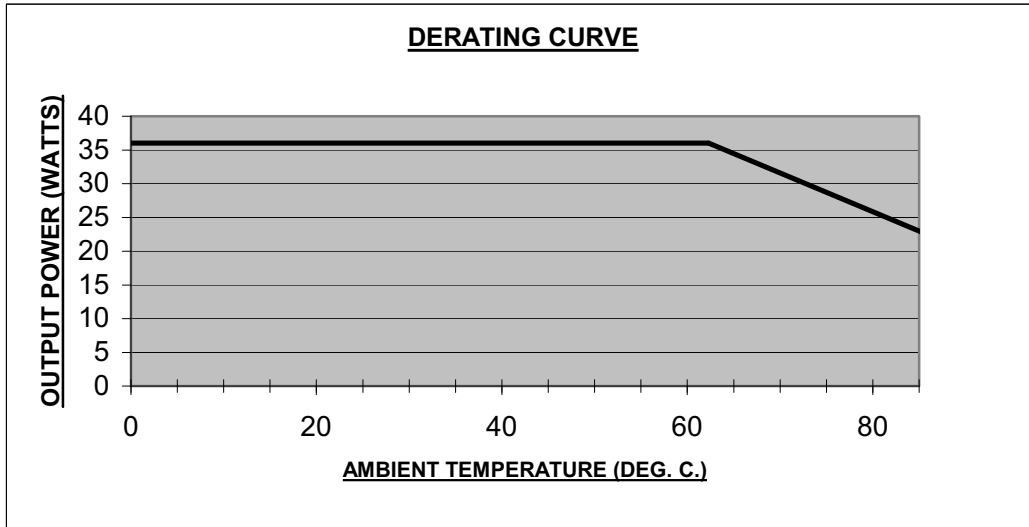


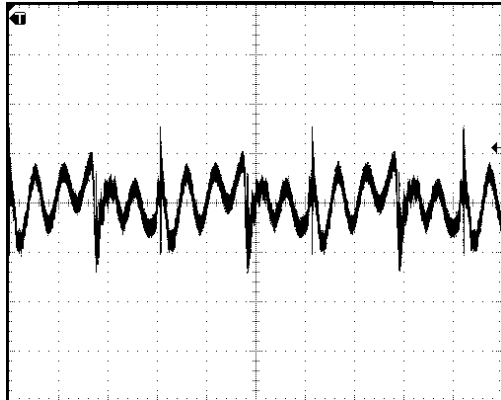


TYPICAL OUTPUT RIPPLE
20mV/div, 1uS/div, full load, 36Vin
10uF // 0.1uF decoupling caps room temp

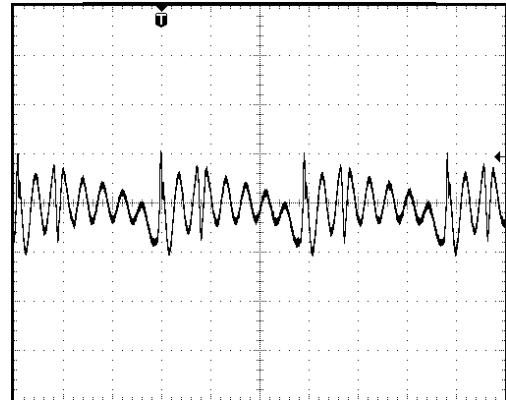


TYPICAL OUTPUT RIPPLE
50mV/div, 1uS/div, full load 75Vin
10uF // 0.1uF decoupling cap room temp

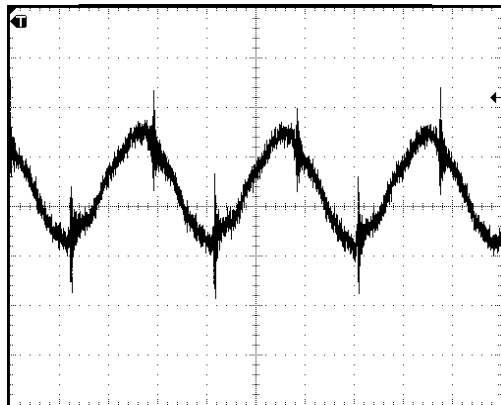


TYPICAL INPUT RIPPLE CURRENT
2mA/div, 1uS/div, full load 48Vin at
room temp with a 12 uH / 33 uF input filter

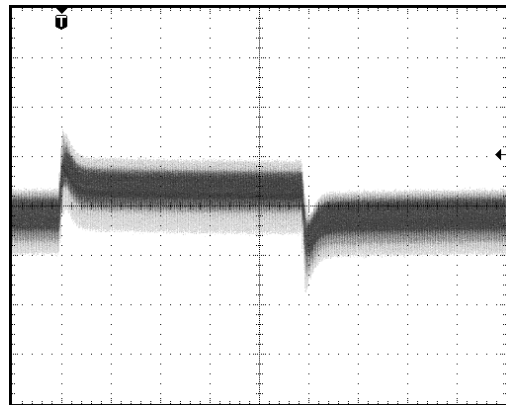

TYPICAL TRANSIENT RESPONSE
50mV/div, 200uS/div, 50% full load
to 75% full load 48Vin room temp

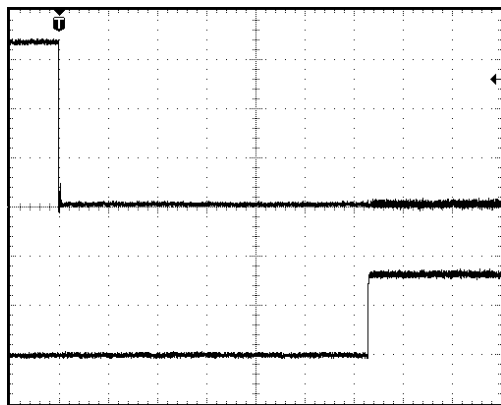


TYPICAL RISE TIME & TURN-ON DELAY
USING LOGIC ENABLE
1V/div, 4mS/div (Vout), 1V/div 4mS/div (logic
enable) 36Vin, full load at room temp

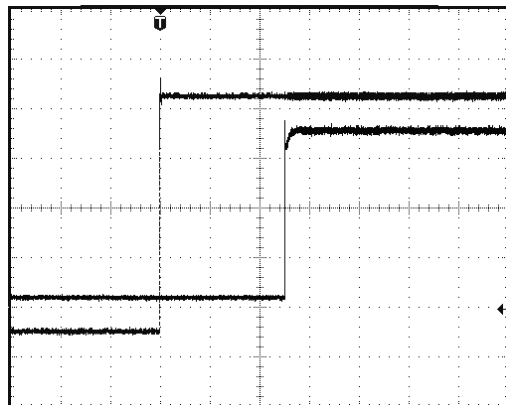

TYPICAL RISE TIME & TURN-ON DELAY
WITH Vin 0-48V
500mV/div, 10mS/div (Vout), 10V/div, 10mS/div (Vin)
at room temp

Ordering Information:

Part Number Example:

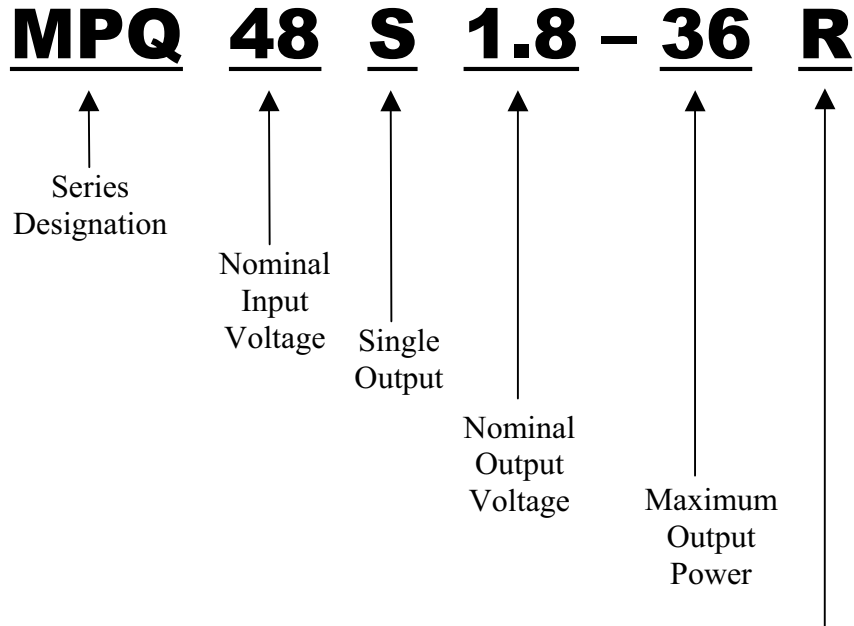

Options	
	Leave Blank for no Options
R	Active Low
C	Case
HS	Heatsink

Company Information:

Wall Industries, Inc. has created custom and modified units for over 40 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001-2000 certification is just one example of our commitment to producing a high quality, well documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎ (603)778-2300
Toll Free: ☎ (888)587-9255
Fax: ☎ (603)778-9797
E-mail: sales@wallindustries.com
Web: www.wallindustries.com
Address: 5 Watson Brook Rd.
Exeter, NH 03833