

**GBP201-1450M**  
US

Inquire

**Application**

for Spurious reduction

**Characteristics**



<b>GBP201-1450M</b>	
Zin/Zout	75 ohm Nominal
Pass Band	950 up to 1450MHz
Insertion Loss	2.0dB max (950 up to 1450MHz)
V.S.W.R	2.0 max (950 up to 1450MHz)
Attenuation	35dB min (0 up to 510MHz)
	25dB min (1800 up to 2500MHz)

**Number of ordered pieces**

500pcs/Reel

**Dimensions**

Dimension (Unit : mm)

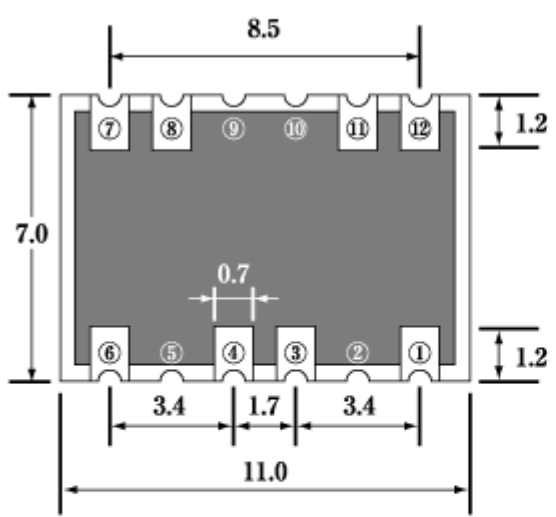

Tolerance : ±0.2 (Terminals)  
: ±0.5 (Outward)

Terminal			
①	INPUT	⑦	GND
③	GND	⑧	GND
④	GND	⑪	GND
⑥	OUTPUT	⑫	GND

**Frequency Data**

