

### EMI Filtering TVS For Data Line

#### FEATURES



- EMI/RFI filtering.
- ESD Protection to IEC 61000-4-2 Level 4.
- Low insertion loss.
- Good attenuation of high frequency signals.
- Low clamping voltage.
- Low operating and leakage current.
- Six elements in one package

#### MAXIMUM RATING (Ta=25°C)


CHARACTERISTIC	SYMBOL	RATING	UNIT
DC Power Per Resistor	$P_R$	100	mW
Power Dissipation	$*P_D$	600	
Junction Temperature	$T_j$	150	°C
Storage Temperature	$T_{stg}$	-55~150	°C

\* Total Package Power Dissipation

#### EQUIVALENT CIRCUIT

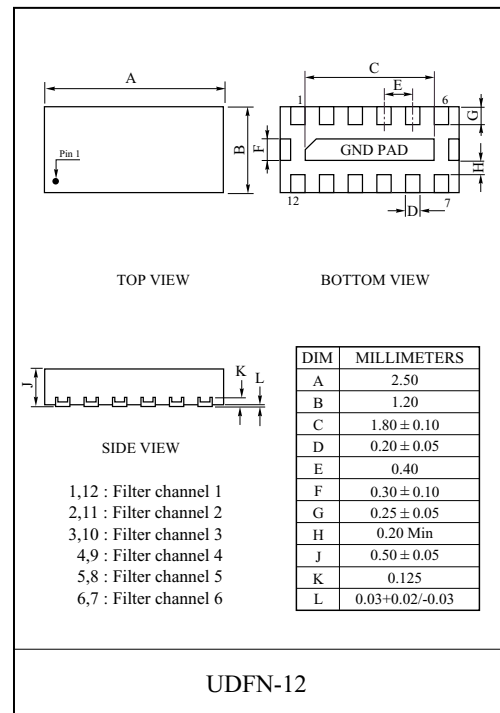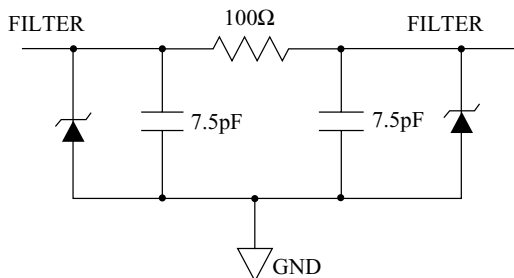

#### MARKING



#### ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Stand-Off Voltage	$V_{RWM}$	-	-	-	5	V
Reverse Breakdown Voltage	$V_{BR}$	$I_t=1mA$	6	-	-	V
Reverse Leakage Current	$I_R$	$V_{RWM}=3V$	-	-	1	$\mu A$
Cutoff Frequency	$f_{3dB}$	$V_R=0V, Z_{SOURCE}=50\Omega, Z_{LOAD}=50\Omega$	-	200	-	MHz
Resistance	R	Between Input and Output	-	100	-	$\Omega$
Capacitance	$C_{2.5V}$	$V_R=2.5V$ , Between I/O Pins and GND	-	15	-	pF

# PF1007UDF12

