

# SHINDENGEN

## General Purpose Rectifiers

Dual

# S1ZA20

## 200V 1.1A


### FEATURES

- Small SMT package
- Array
- High reliability with superior moisture resistance
- Applicable to Automatic Insertion

### APPLICATION

- Conventional Rectification
- Motor
- Home Appliances, Office Equipment
- Telecommunication, Factory Automation

### OUTLINE DIMENSIONS

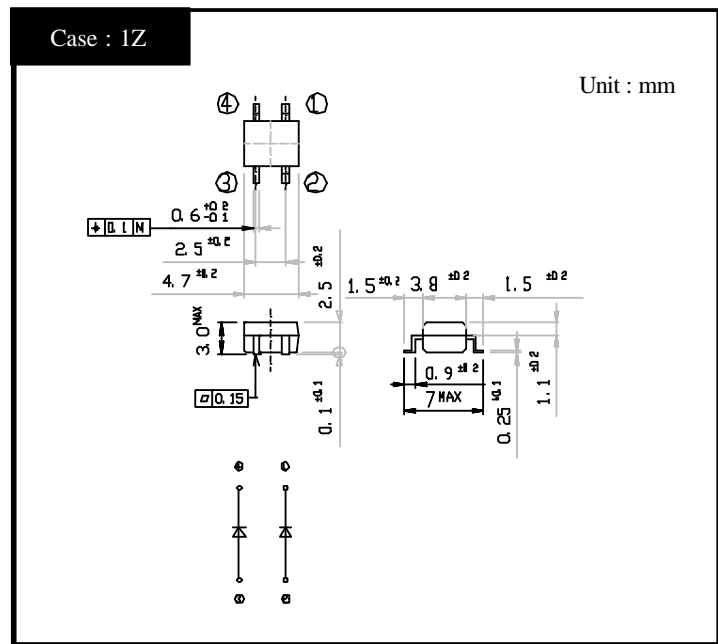

### RATINGS

Absolute Maximum Ratings (If not specified  $T_i=25$  )


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	$T_{stg}$		-40 ~ 150	
Operating Junction Temperature	$T_j$		150	
Maximum Reverse Voltage	$V_{RM}$		200	V
Average Rectified Forward Current	$I_O$	50Hz sine wave, R-load $T_a=25$ On alumina substrate 1 element operation	1.1	A
		50Hz sine wave, R-load $T_a=25$ On alumina substrate 2 element operation	0.8	
		50Hz sine wave, R-load $T_a=25$ On glass-epoxy substrate 1 element operation	0.9	
		50Hz sine wave, R-load $T_a=25$ On glass-epoxy substrate 2 element operation	0.63	
Peak Surge Forward Current	$I_{FSM}$	50Hz sine wave, Non-repetitive 1cycle peak value, $T_i=25$	30	A

Electrical Characteristics (If not specified  $T_i=25$  )

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	$V_F$	$I_F=0.9A$ , Pulse measurement, Rating of per diode	Max.1.1	V
Reverse Current	$I_R$	$V_R=V_{RM}$ , Pulse measurement, Rating of per diode	Max.10	$\mu A$
Thermal Resistance	$\theta_{ja}$	junction to ambient On alumina substrate 1 element operation	Max.93	/W
		junction to ambient On alumina substrate 2 element operation	Max.140	
		junction to ambient On glass-epoxy substrate 1 element operation	Max.120	
		junction to ambient On glass-epoxy substrate 2 element operation	Max.186	


S1ZAx

Forward Voltage

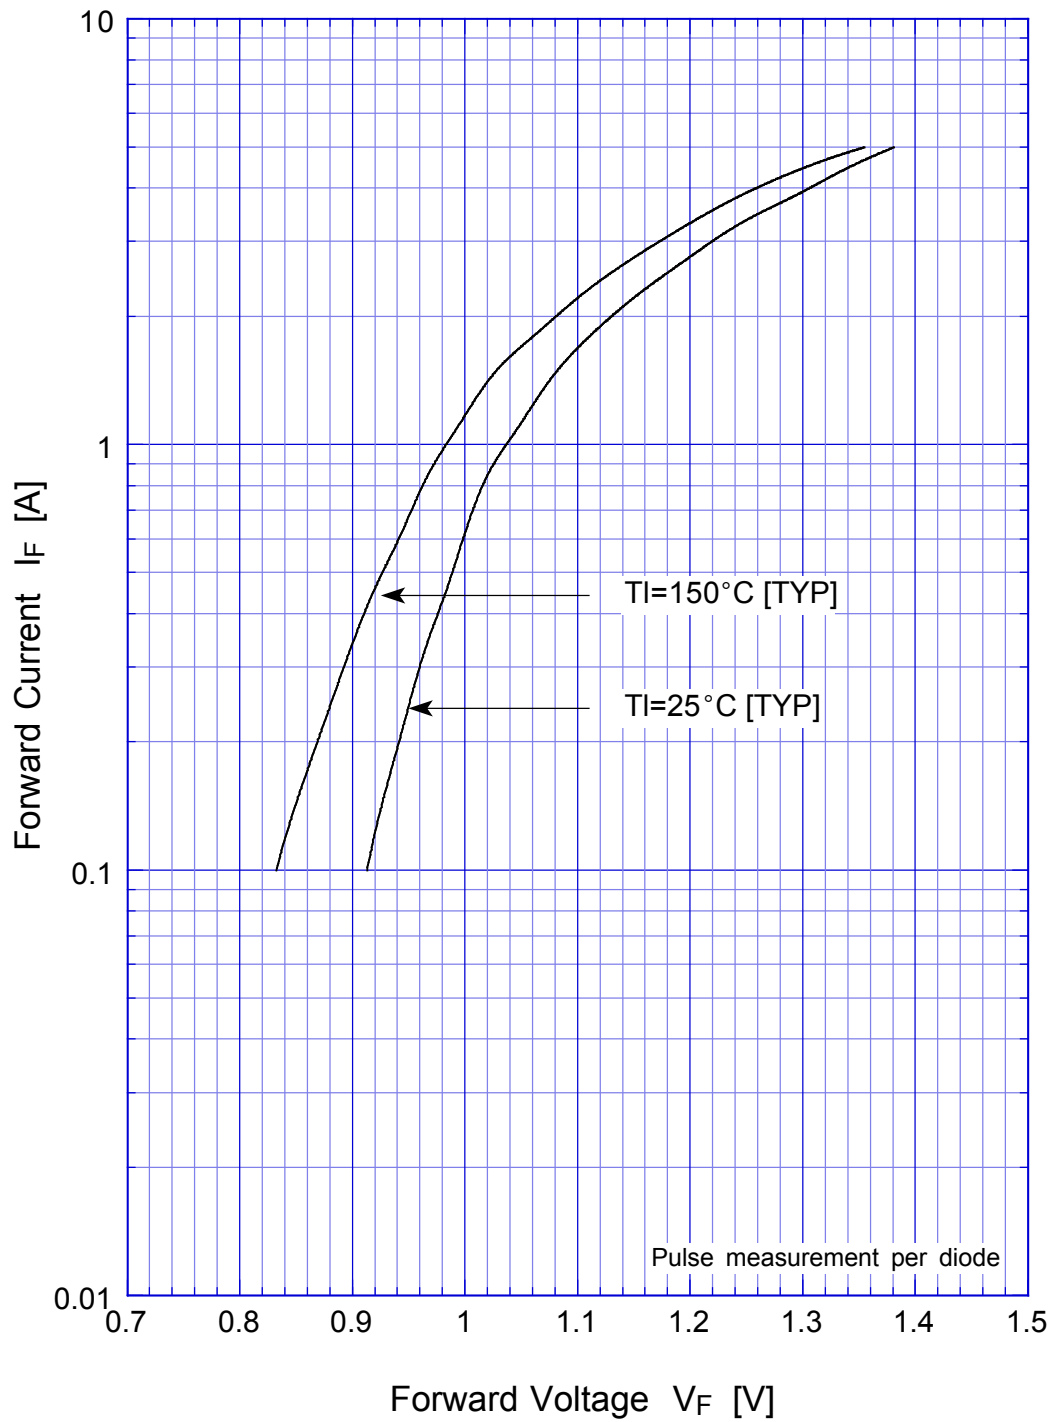

S1ZAx


Forward Power Dissipation

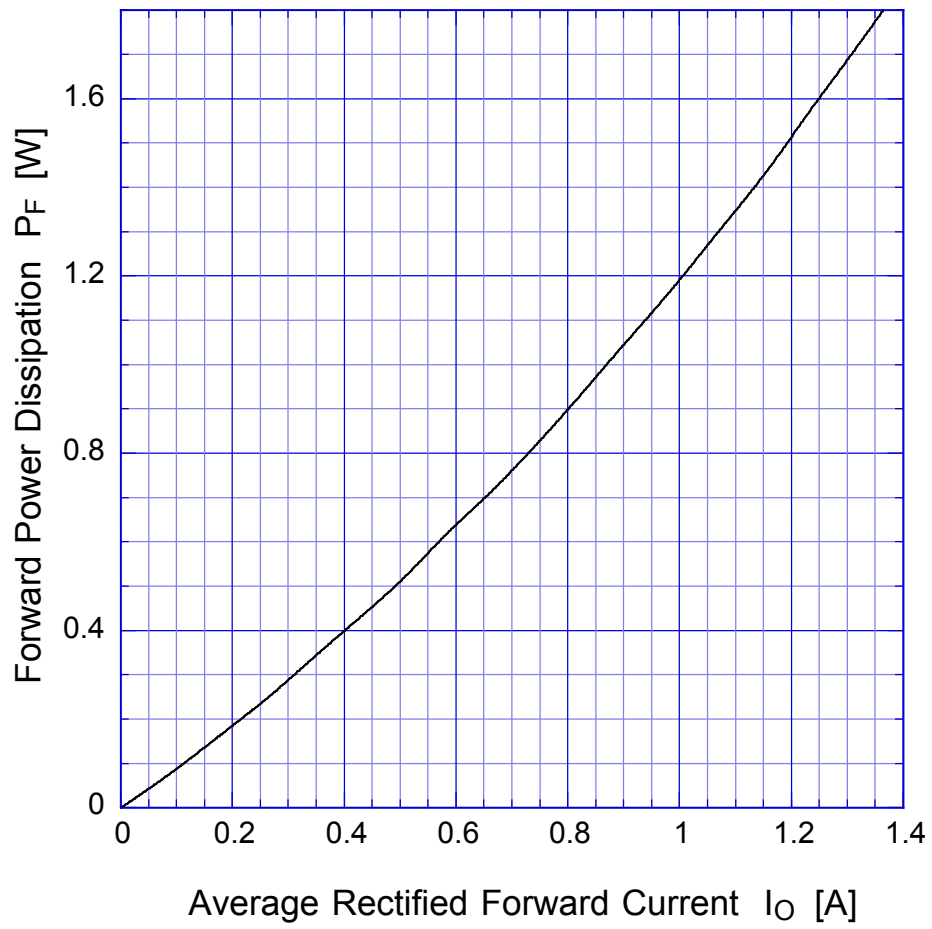

$T_j = 150^\circ\text{C}$   
Sine wave

# S1ZAx

## Derating Curve

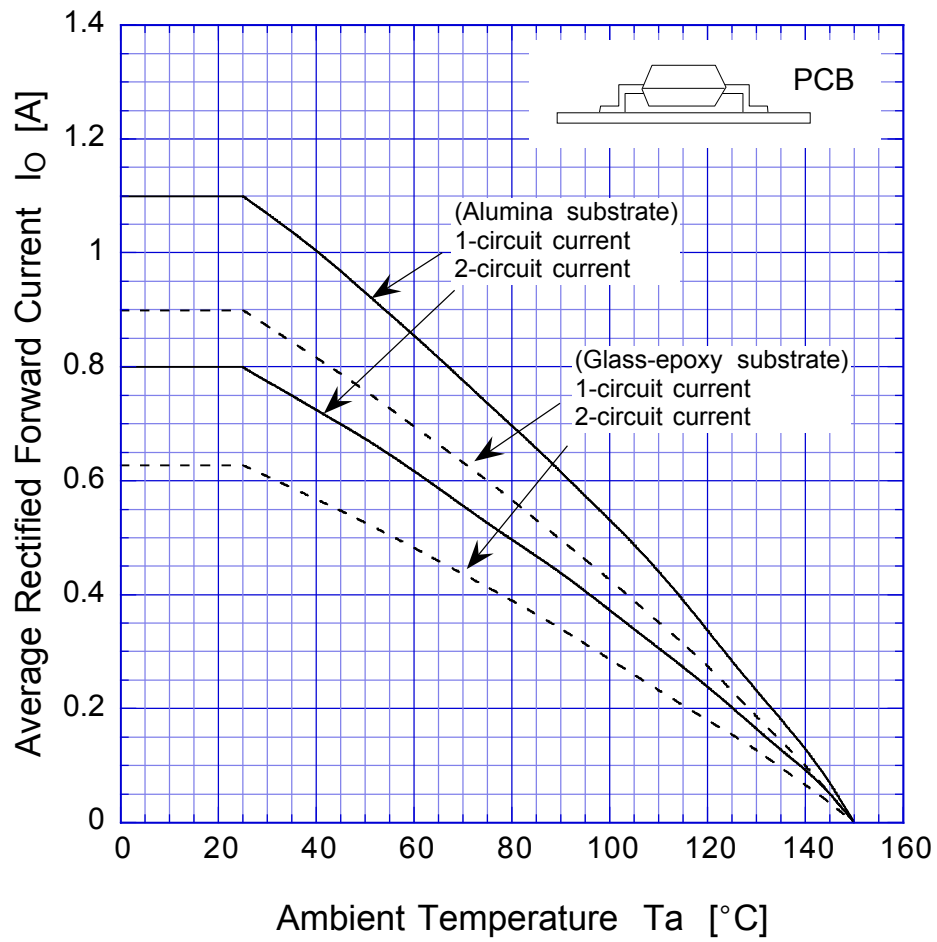

Alumina substrate  
 Soldering land 1mm  
 Conductor layer 20 $\mu$ m  
 Substrate thickness 0.64mm

Glass-epoxy substrate  
 Soldering land 1mm  
 Conductor layer 35 $\mu$ m

Sine wave  
 R-load  
 Free in air

# S1ZAx

## Peak Surge Forward Capability

