


T-1 3/4 Bi-Pin Base (.125")

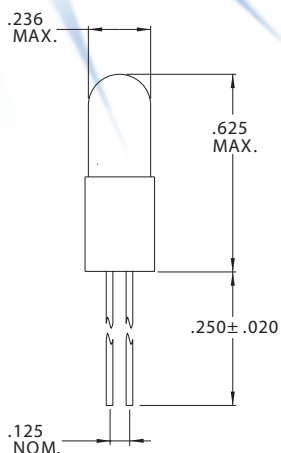

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM2332 | 14.0 | .080 | .300 | 50,000 | C-2F |
| CM2335 | 14.0 | .080 | .300 | 15,000 | C-2F |
| CM7330 | 14.0 | .080 | .500 | 1,500 | C-2R |
| CM7373 | 14.0 | .100 | .500 | 10,000 | C-2F |
| CM7382 | 14.0 | .080 | .300 | 15,000 | C-2F |
| CM7410 | 14.0 | .100 | .500 | 15,000 | C-2F |
| CM7003 | 15.0 | .040 | .750 | 2,000 | C-2F |
| CM2311 | 18.0 | .040 | .250 | 1,000 | C-2F |
| CM2316 | 18.0 | .040 | .150 | 10,000 | C-2F |
| CM7370 | 18.0 | .040 | .150 | 10,000 | C-2F |
| CM7459 | 22.0 | .040 | .300 | 2,000 | C-2F |
| CM2313 | 24.0 | .050 | .600 | 1,000 | C-2F |
| CM2341 | 24.0 | .060 | .500 | 5,000 | C-2F |
| CM7001 | 24.0 | .050 | .500 | 1,000 | C-2F |
| CM2312 | 28.0 | .040 | .340 | 1,000 | C-2F |
| CM2314 | 28.0 | .050 | .700 | 1,000 | C-2F |
| CM2324 | 28.0 | .040 | .340 | 4,000 | C-2F |
| CM2325 | 28.0 | .040 | .340 | 1,000 | C-2F |
| CM2329 | 28.0 | .047 | .340 | 2,500 | C-2F |
| CM2342 | 28.0 | .040 | .300 | 25,000 | C-2F |
| CM7136 | 28.0 | .024 | .150 | 4,000 | CC-2F |
| CM7327 | 28.0 | .040 | .340 | 4,000 | C-2F |
| CM7374 | 28.0 | .040 | .150 | 10,000 | C-2F |
| CM7376 | 28.0 | .065 | .650 | 5,000 | C-2F |
| CM7387 | 28.0 | .040 | .300 | 7,000 | C-2F |
| CM7876 | 28.0 | .060 | .340 | 25,000 | C-2F |
| CM7748 | 48.0 | .025 | .200 | 5,000 | CC-2F |