



S-11 Double Contact Bayonet Base




| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM1724 | 6.2 | 4.50 | 32.0 | 400 | C-6 |
| CM310 | 28.0 | .90 | 32.0 | 300 | C-2V |
| CM312 | 28.0 | 1.29 | 50.0 | 300 | C-2V |

T-3/4 Wire Terminal

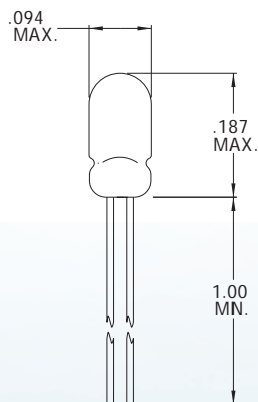

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM7101 | 1.5 | .015 | .010 | 5,000 | C-2R |
| CM28 | 4.5 | .021 | .020 | 5,000 | C-2R |
| CM30 | 4.5 | .021 | .020 | 5,000 | C-2R |
| CM3102 | 4.5 | .022 | .020 | 5,000 | C-2R |
| CM2 | 5.0 | .021 | .030 | 10,000 | C-2R |
| CM6153 | 5.0 | .060 | .150 | 3,000 | C-2R |
| CM6803 | 5.0 | .060 | .030 | 60,000 | C-2R |
| CM6833 | 5.0 | .060 | .050 | 25,000 | C-2R |
| CM7102 | 5.0 | .115 | .200 | 5,000 | C-2R |
| CM7133 | 5.0 | .075 | .090 | 25,000 | C-2R |
| CM7153 | 5.0 | .115 | .150 | 40,000 | C-2R |
| CM8537 | 5.0 | .015 | .020 | 1,000 | C-2R |
| CM8666 | 5.0 | .080 | .150 | 15,000 | C-2R |

T-3/4 Micro-Midget Flange Base



| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM3810 | 1.5 | .015 | .003 | 10,000 | C-6 |
| CM3811 | 1.5 | .015 | .010 | 5,000 | C-6 |
| CM7121 | 2.5 | .110 | .001 | 10,000 | C-2R |
| CM6183 | 5.0 | .060 | .150 | 3,000 | C-2 |
| CM7122 | 5.0 | .021 | .030 | 10,000 | C-2R |
| CM7123 | 5.0 | .115 | .200 | 5,000 | C-2R |
| CM8270 | 5.0 | .115 | .150 | 40,000 | C-2R |