




VCD2 203 , 205 4 Pad SMD

Package Option	14.4 x 9.6 x 5.5 mm 4 pad SMD
Frequency Range	10.0 to 52.0 MHz
Supply Voltage/ Load:	203 = + 3.3 Vdc \pm 10 % 15pF 205 = + 5.0 Vdc \pm 10 % 15pF
Electrical:	Tristate 55/45 Symmetry
Enable/Disable:	Logic 1 or NC = Enable (Oscillation) Logic 0 or GND = Disable (High Impedance)
Stability:	\pm 20 PPM -40°C to +85°C for 10 years all parameters
Start-Up:	10 ms Maximum
Load:	HCMOS/TTL
Current:	50 mA Maximum
Jitter:	5.0 psec RMS Maximum
STD Package:	Anti Static Tubes
Typical P/N:	VCD2-203-19M440 VCD2 = 14.4 x 9.6 x 5.5 mm 4 pad SMD 203 = + 3.3 Vdc \pm 10 %, \pm 20 PPM -40°C to +85°C for 10 years all parameters

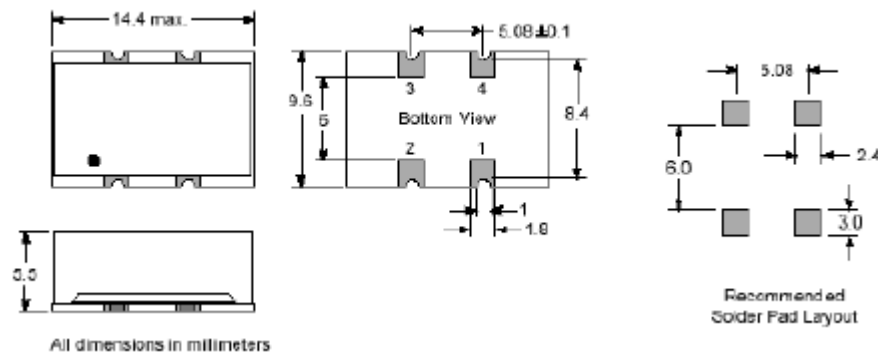

Pin 1: Tri-State, Pin 2: Ground, Pin 3: Output, Pin 4: Vcc