


## The RS TO39-3 Series of Two-Port SAW Resonators

### Electrical Connections


Either pin 1 or pin 2 may be used for input or output with these bidirectional, two-port, three-terminal, SAW resonators. However, impedances and circuit board parasitics may not be symmetrical, requiring slightly different oscillator component values for different resonator connections.

Pin	Connection
1	Input or Output
2	Output or Input
3	Case Ground




### Typical Test Circuit

The test circuit inductor,  $L_{TEST}$ , is used to resonate with the static capacitance,  $C_O$  (which is measured at low frequency with a capacitance meter).




### Typical Application Circuits

The following circuit illustrates a basic oscillator topology. This resonator is suitable for oscillator designs requiring  $0^\circ$  phase shift at resonance in a two-port configuration.




### Equivalent LC Model

The following equivalent LC model is valid near resonance:




### Temperature Characteristics

The curve shown on the right accounts for resonator contribution only and does not include oscillator temperature characteristics.



### Case Design

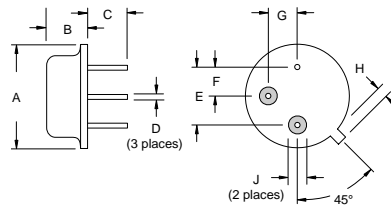

Dimension	Millimeters		Inches	
	Minimum	Maximum	Minimum	Maximum
A		9.30		0.366
B		3.18		0.125
C	2.50	3.50	0.098	0.138
D	0.46 Nominal		0.018 Nominal	
E	5.08 Nominal		0.200 Nominal	
F	2.54 Nominal		0.100 Nominal	
G	2.54 Nominal		0.100 Nominal	
H		1.02		0.040
J	1.40		0.055	



# RS1035-5

- Designed for 680.0 MHz CATV Converter LOs
- Nominal Insertion Phase Shift of 0° at Resonance
- Quartz Stability
- Rugged, Hermetic, Low-Profile TO39 Case

## 680.1 MHz SAW Resonator

The RS1035-5 is a two-port surface-acoustic-wave (SAW) resonator in a low-profile TO39 case. It provides reliable, fundamental-mode, quartz frequency stabilization of fixed-frequency oscillators operating at or near 680 MHz. Typical applications include the second LO in CATV set-top converters with channel 4 output.



TO39-3 Case

### Absolute Maximum Ratings

Rating	Value	Units
CW RF Power Dissipation (See: Typical Test Circuit.)	+5	dBm
DC Voltage between Any Two Pins (Observe ESD Precautions.)	±30	VDC
Case Temperature <sup>1</sup>	-40 to +85	°C

### Electrical Characteristics

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units
Center Frequency (+25°C) Absolute Frequency Tolerance from 680.100 MHz	$f_c$	2, 3, 4, 5	680.000		680.200	MHz
	$\Delta f_c$				±100	kHz
Insertion Loss	IL	2, 5, 6		9.1	12.5	dB
Quality Factor	Unloaded Q	5, 6, 7		8,600		
	50 Ω Loaded Q			5,500		
Temperature Stability	Turnover Temperature	6, 7, 8	48	63	78	°C
	Turnover Frequency			$f_c + 36$		kHz
	Frequency Temperature Coefficient		FTC		0.037	
Frequency Aging	Absolute Value during the First Year	$f_A$	6	≤ 10		ppm/yr
DC Insulation Resistance between Any Two Pins		5	1.0			MΩ
RF Equivalent RLC Model	Motional Resistance	5, 7, 9		186	322	Ω
	Motional Inductance			374.334		μH
	Motional Capacitance			0.146297		fF
	Shunt Static Capacitance		$C_0$	1.3	1.6	1.9

Lid Symbolization (in Addition to Lot and/or Date Codes)	RFM 1035-5
--	------------

**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**

#### NOTES:

1. Frequency aging is the change in  $f_c$  with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing in subsequent years.
2. The frequency  $f_c$  is the frequency of minimum IL with the resonator in the specified test fixture in a 50 Ω test system with VSWR ≤ 1.2:1. Typically,  $f_{OSCILLATOR}$  or  $f_{TRANSMITTER}$  is less than the resonator  $f_c$ .
3. One or more of the following United States patents apply: 4,454,488; 4,616,197.
4. Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
5. Unless noted otherwise, case temperature  $T_C = +25^\circ\text{C} \pm 2^\circ\text{C}$ .
6. The design, manufacturing process, and specifications of this device are subject to change without notice.
7. Derived mathematically from one or more of the following directly measured parameters:  $f_c$ , IL, 3 dB bandwidth,  $f_c$  versus  $T_C$ , and  $C_0$ .
8. Turnover temperature,  $T_0$ , is the temperature of maximum (or turnover) frequency,  $f_0$ . The nominal frequency at any case temperature,  $T_C$ , may be calculated from:  $f = f_0 [1 - FTC (T_0 - T_C)^2]$ . Typically, *oscillator*  $T_0$  is 20° less than the specified *resonator*  $T_0$ .
9. This equivalent RLC model approximates resonator performance near the resonant frequency and is provided for reference only. The capacitance  $C_0$  is the measured static (nonmotional) capacitance between either pin 1 and ground or pin 2 and ground. The measurement includes case parasitic capacitance.

**RFM**<sup>®</sup>

---