

2A01 THRU 2A07	
2.0 AMPS. Silicon Rectifiers	
<p>Features</p> <ul style="list-style-type: none"> Low forward voltage drop High current capability High reliability High surge current capability <p>Mechanical Data</p> <ul style="list-style-type: none"> Cases: Molded plastic Epoxy: UL 94V-O rate flame retardant Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed Polarity: Color band denotes cathode end High temperature soldering guaranteed: 250°C/10 seconds/.375" (9.5mm) lead lengths at 5 lbs., (2.3kg) tension Weight: 0.40 gram 	<p style="text-align: center;">Voltage Range 50 to 1000 Volts Current 2.0Amperes</p> <p style="text-align: center;">DO-15</p> <div style="text-align: center;"> </div> <p style="text-align: center;">Dimensions in inches and (millimeters)</p>

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Symbols	2A01	2A02	2A03	2A04	2A05	2A06	2A07	Units
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375 (9.5mm) Lead Length @ T _A = 75°C	2.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	60							A
Maximum Instantaneous Forward Voltage @ 2.0A	1.0							V
Maximum DC Reverse Current @ T _A =25°C at Rated DC Blocking Voltage @ T _A =100°C	5.0 50							uA uA
Maximum Full Load Reverse Current, Full Cycle Average .375" (9.5mm) Lead Length @ T _A =75°C	30							uA
Typical Junction Capacitance (Note 1)	30							pF
Typical Thermal Resistance R _{θJA} (Note 2)	50							°C/W
Operating Temperature Range T _J	-65 to +125							°C
Storage Temperature Range T _{STG}	-65 to +150							°C

Notes: 1. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.

2. Thermal Resistance from Junction to Ambient .375" (9.5mm) Lead Length.

SURGE COMPONENTS, INC. 1016 GRAND BLVD., DEER PARK, NY 11729
PHONE (631) 595-1818 FAX (631) 595-1283 www.surgecomponents.com

RATINGS AND CHARACTERISTIC CURVES (2A01 THRU 2A07)

FIG. 1- MAXIMUM FORWARD CURRENT DERATING CURVE

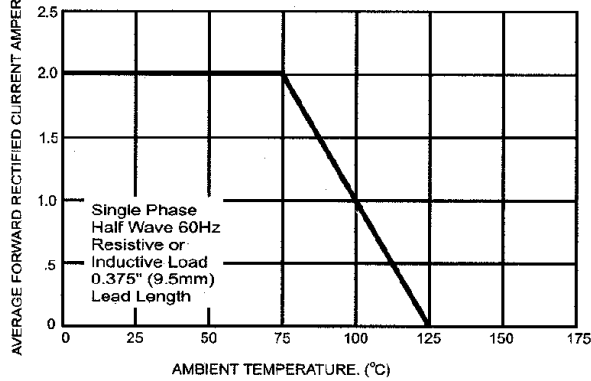


FIG. 2- TYPICAL FORWARD CHARACTERISTICS

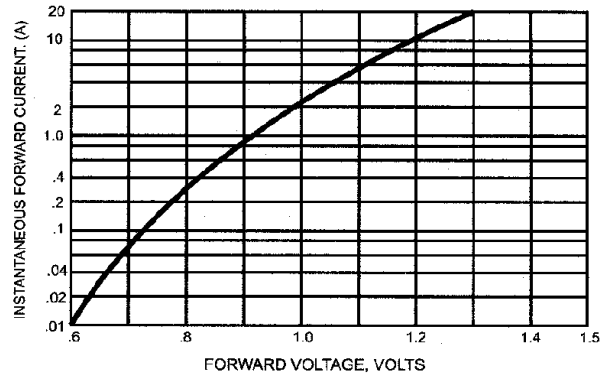


FIG. 3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

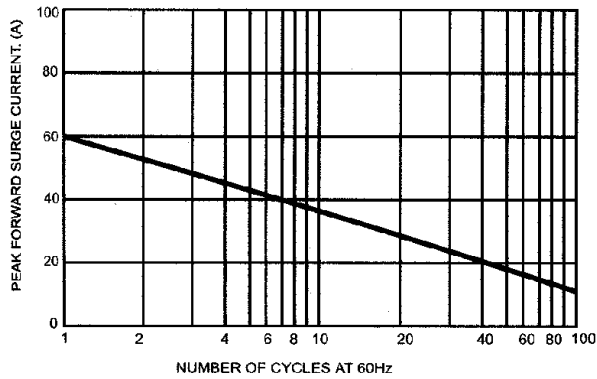


FIG. 4- TYPICAL REVERSE CHARACTERISTICS

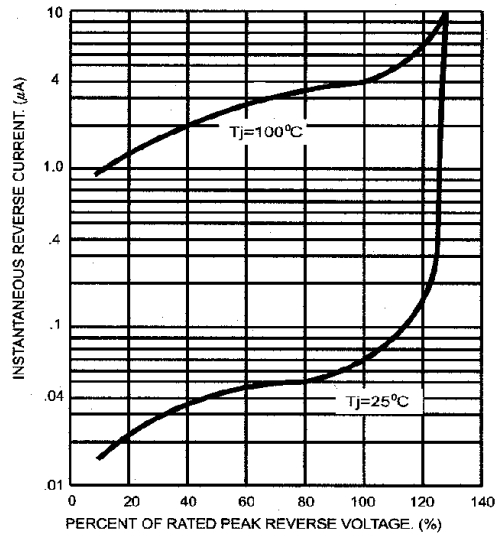


FIG. 5- TYPICAL JUNCTION CAPACITANCE

