

SHINDENGEN

General Purpose Rectifiers

Single

D2F20

200V 1.4A

FEATURES

- High reliability with superior moisture resistance
- Applicable to Automatic Insertion


APPLICATION

- Conventional Rectification
- Power source(Power Supply)
- Home Appliances, Office Equipment
- Telecommunication, Factory Automation

OUTLINE DIMENSIONS

Case : 2F

(Unit : mm)

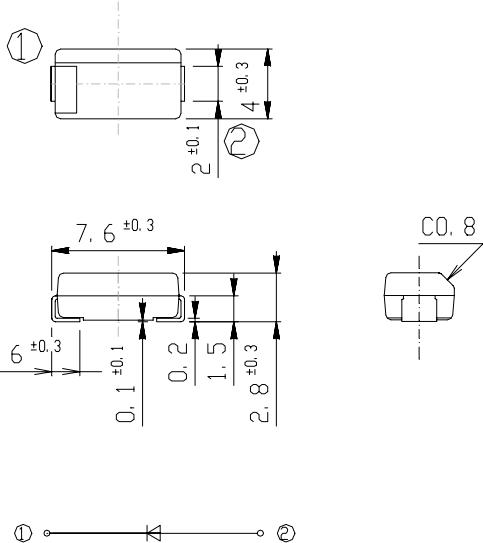

RATINGS

● Absolute Maximum Ratings (If not specified $T_I=25^\circ\text{C}$)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		-55~150	$^\circ\text{C}$
Operating Junction Temperature	T_j		150	$^\circ\text{C}$
Maximum Reverse Voltage	V_{RM}		200	V
Average Rectified Forward Current	I_O	50Hz sine wave, R-load, $T_a=25^\circ\text{C}$ On alumina substrate	1.4	A
		50Hz sine wave, R-load, $T_a=25^\circ\text{C}$ On glass-epoxy substrate	1.1	
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, $T_j=25^\circ\text{C}$	60	A

● Electrical Characteristics (If not specified $T_I=25^\circ\text{C}$)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=1.4\text{A}$, Pulse measurement	Max.1.05	V
Reverse Current	I_R	$V_R=V_{RM}$, Pulse measurement	Max.10	μA
Thermal Resistance	θ_{jl}	junction to lead	Max.24	$^\circ\text{C}/\text{W}$
		junction to ambient, On alumina substrate	Max.90	
	θ_{ja}	junction to ambient, On glass-epoxy substrate	Max.120	


D2Fx

Forward Voltage

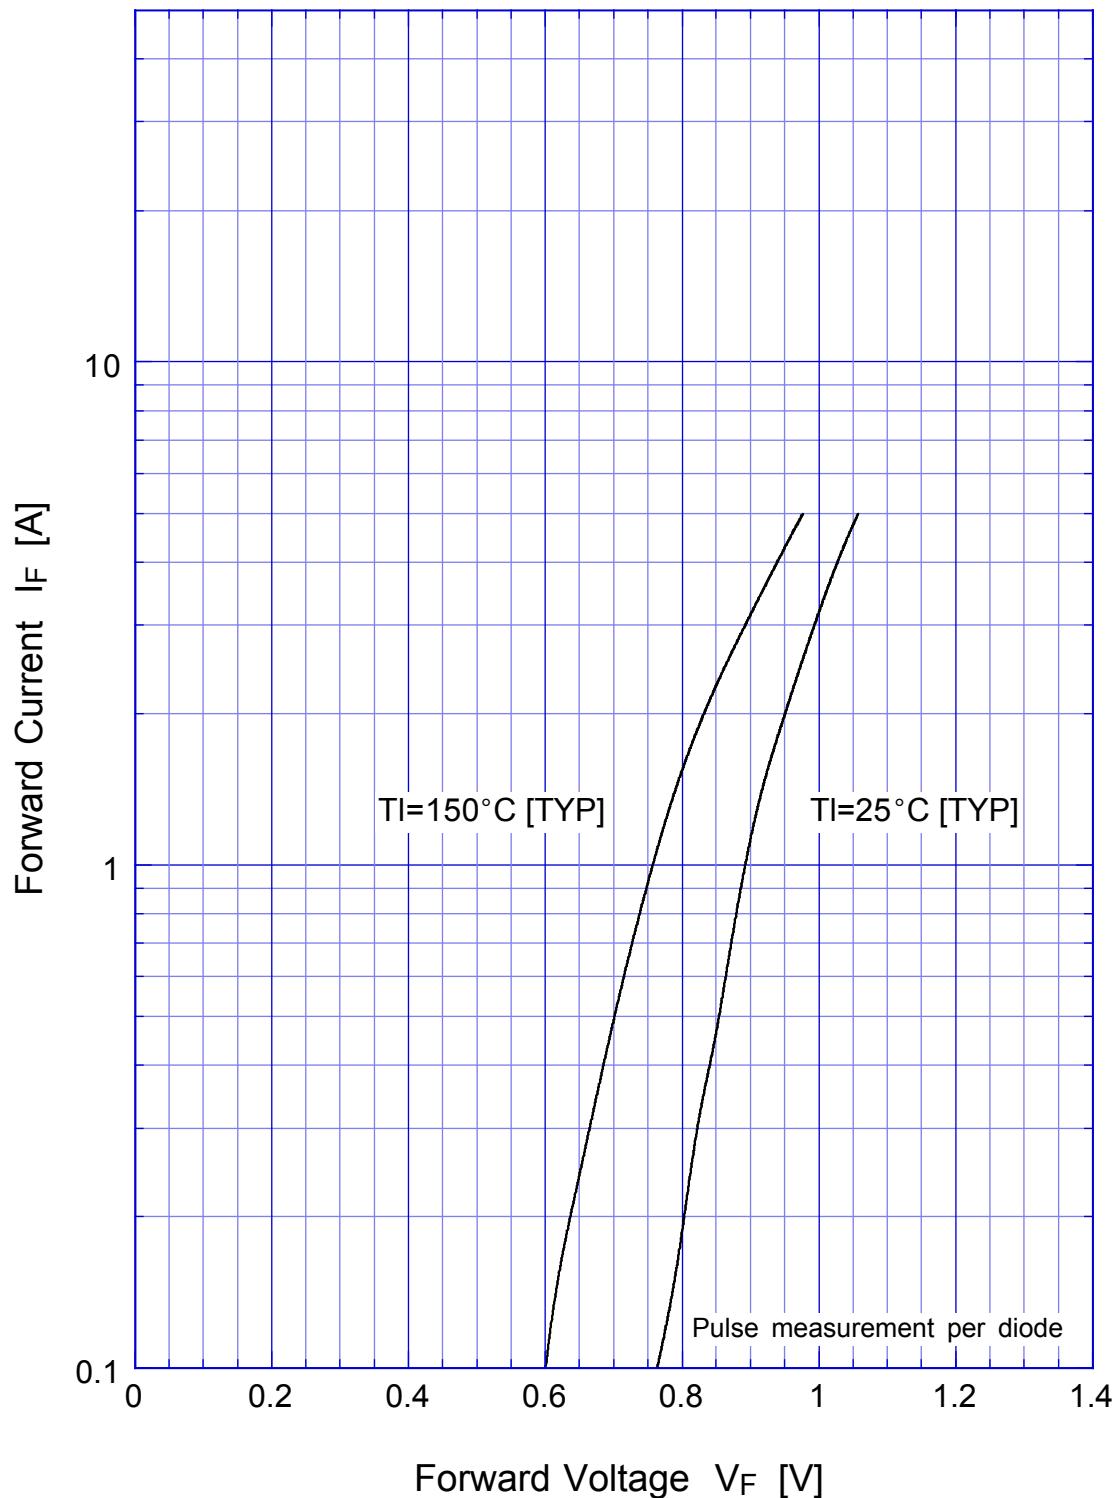


D2Fx

Forward Power Dissipation

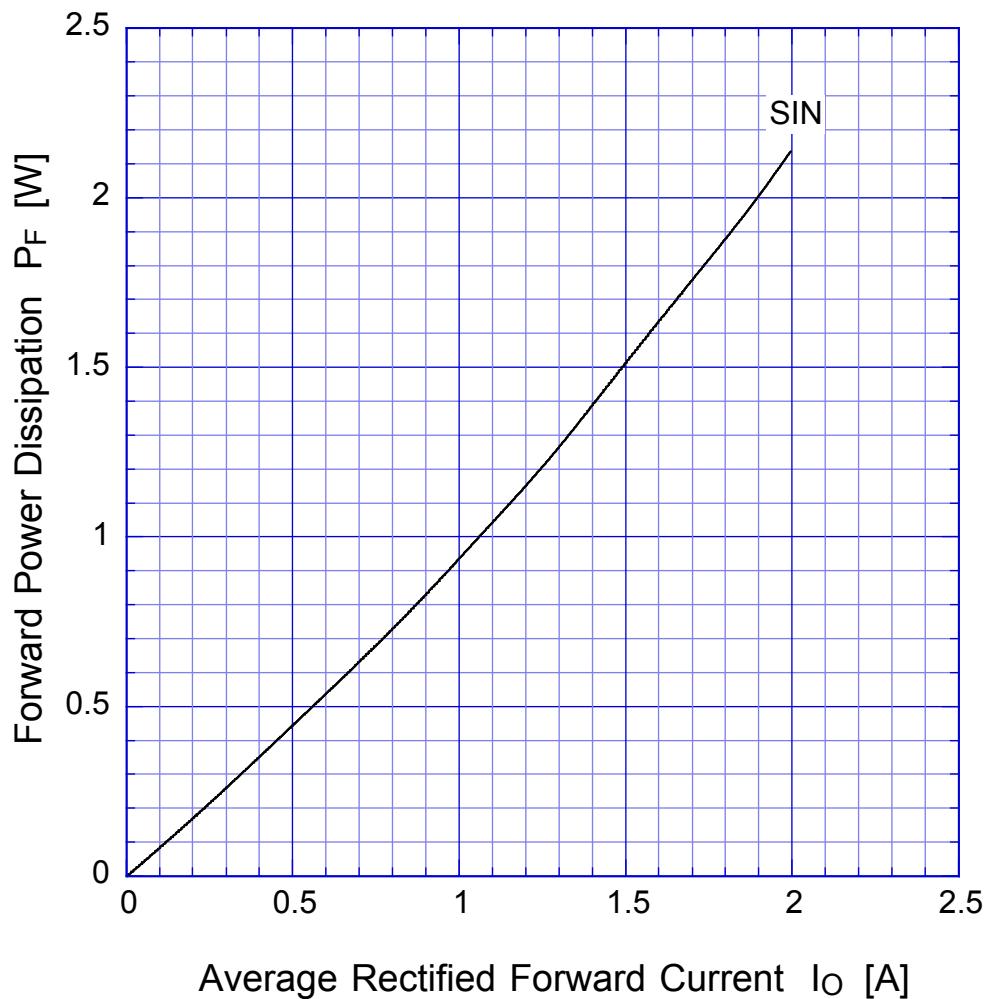

$T_j = 150^\circ\text{C}$
Sine wave

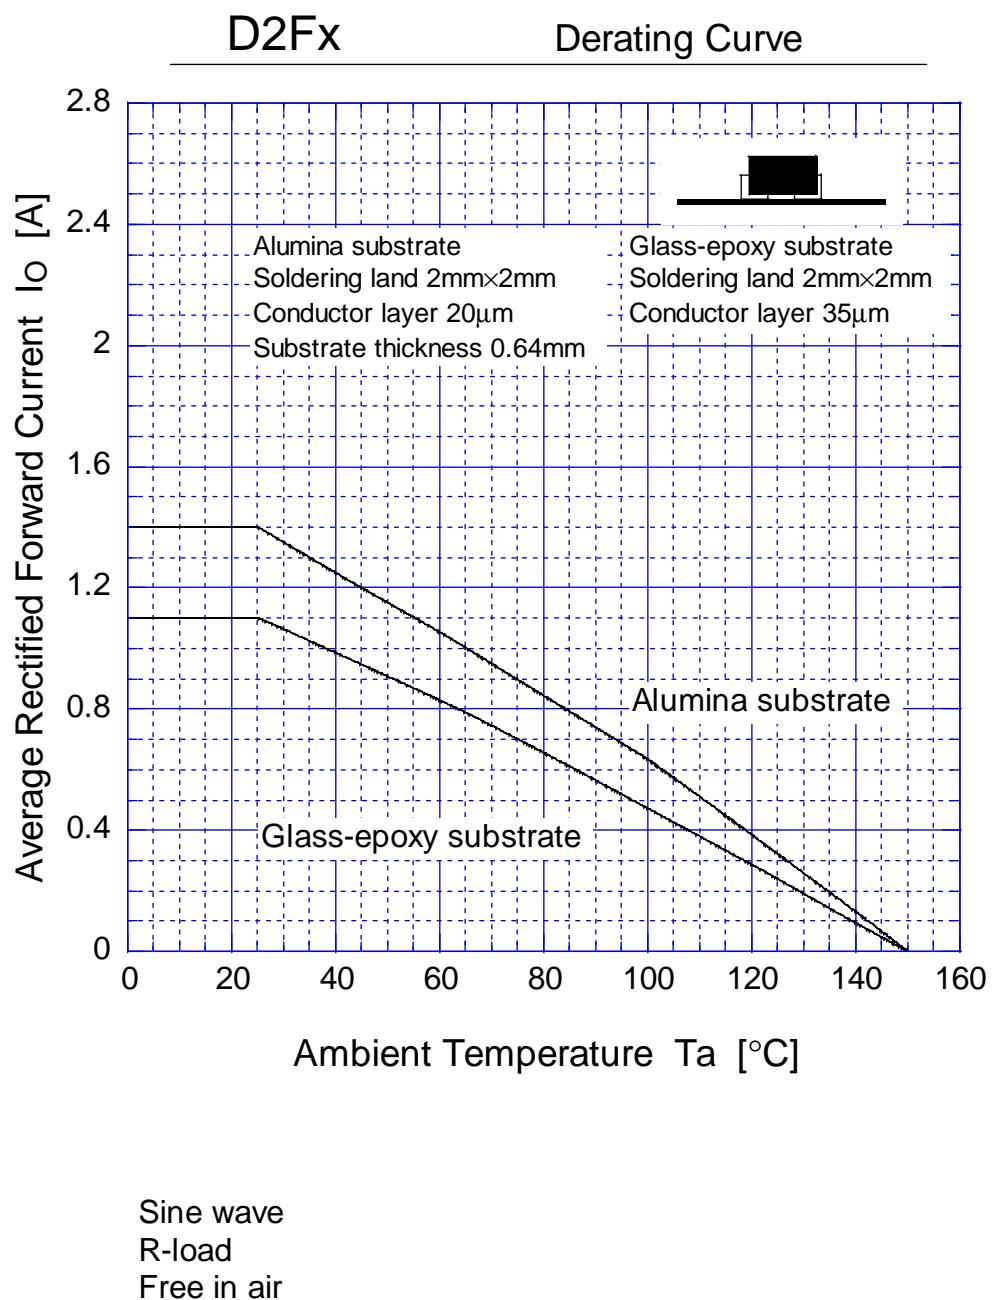

D2Fx

Peak Surge Forward Capability

