

# International **IR** Rectifier

PD-2.223 rev. B 12/97

## 63CNQ... SERIES

SCHOTTKY RECTIFIER

60 Amp


### Major Ratings and Characteristics

Characteristics	63CNQ...	Units
$I_{F(AV)}$ Rectangular waveform	60	A
$V_{RRM}$	80 to 100	V
$I_{FSM}$ @ $t_p = 5 \mu s$ sine	8200	A
$V_F$ @ 30 Apk, $T_J = 125^\circ C$ (per leg)	0.64	V
$T_J$	-55 to 175	°C

### Description/Features

The 63CNQ center tap Schottky rectifier module series has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to  $175^\circ C$  junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- $175^\circ C T_J$  operation
- Center tap module
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Low profile, small footprint, high current package

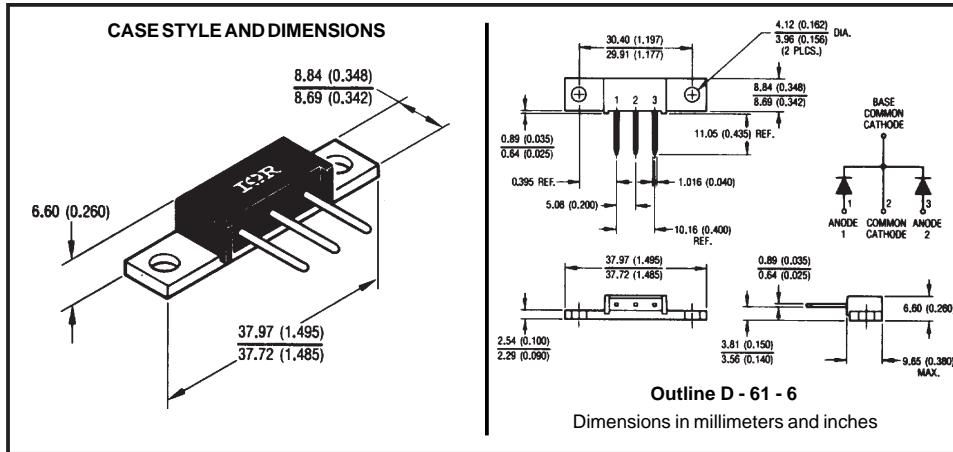

**Voltage Ratings**

Part number	63CNQ080	63CNQ100
$V_R$ Max. DC Reverse Voltage (V)	80	
$V_{RWM}$ Max. Working Peak Reverse Voltage (V)		100

**Absolute Maximum Ratings**

Parameters	63CNQ	Units	Conditions		
$I_{F(AV)}$ Max. Average Forward Current * See Fig. 5	60	A	50% duty cycle @ $T_C = 155^\circ\text{C}$ , rectangular waveform		
$I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	8200	A	5μs Sine or 3μs Rect. pulse	Following any rated load condition and with 10ms Sine or 6ms Rect. pulse applied	
	620		10ms Sine or 6ms Rect. pulse		
$E_{AS}$ Non-Repetitive Avalanche Energy (Per Leg)	15	mJ	$T_J = 25^\circ\text{C}$ , $I_{AS} = 1$ Amps, $L = 30$ mH		
$I_{AR}$ Repetitive Avalanche Current (Per Leg)	1	A	Current decaying linearly to zero in 1 μsec Frequency limited by $T_J$ , max. $V_A = 1.5 \times V_R$ typical		

**Electrical Specifications**

Parameters	63CNQ	Units	Conditions		
$V_{FM}$ Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1)	0.77	V	@ 30A	$T_J = 25^\circ\text{C}$	
	0.93	V	@ 60A		
	0.64	V	@ 30A	$T_J = 125^\circ\text{C}$	
	0.76	V	@ 60A		
$I_{RM}$ Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1)	1.5	mA	$T_J = 25^\circ\text{C}$	$V_R = \text{rated } V_R$	
	20	mA	$T_J = 125^\circ\text{C}$		
$C_T$ Max. Junction Capacitance (Per Leg)	1400	pF	$V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$		
$L_S$ Typical Series Inductance (Per Leg)	6.0	nH	Measured lead to lead 5mm from package body		
dv/dt Max. Voltage Rate of Change (Rated $V_R$ )	10,000	V/μs			

(1) Pulse Width &lt; 300μs, Duty Cycle &lt;2%

**Thermal-Mechanical Specifications**

Parameters	63CNQ	Units	Conditions	
$T_J$ Max. Junction Temperature Range	-55 to 175	°C		
$T_{stg}$ Max. Storage Temperature Range	-55 to 175	°C		
$R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Leg)	0.85	°C/W	DC operation	* See Fig. 4
$R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Package)	0.42	°C/W	DC operation	
$R_{thCS}$ Typical Thermal Resistance, Case to Heatsink	0.30	°C/W	Mounting surface, smooth and greased	
wt Approximate Weight	7.8(0.28)	g(oz.)		
T Mounting Torque	Min.	40(35)	Kg-cm (lbf-in)	
	Max.	58(50)		
Case Style	D - 61 - 6			

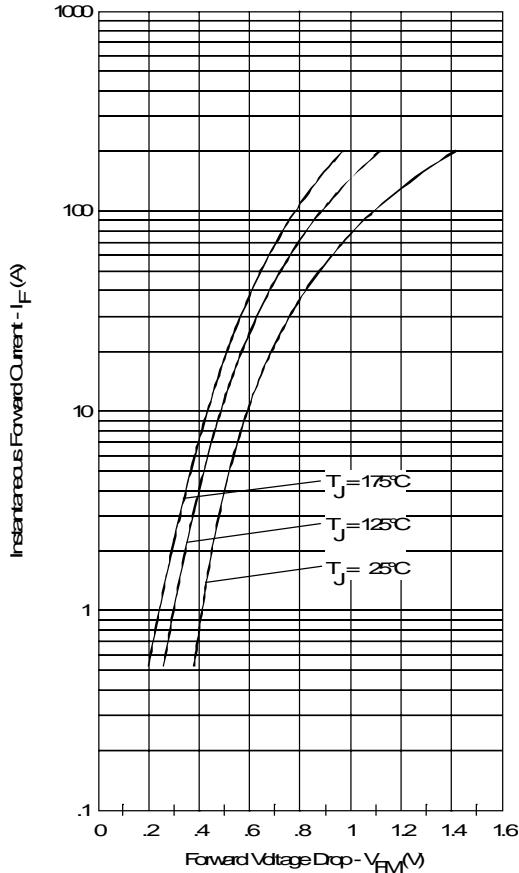


Fig. 1-Max. Forward Voltage Drop Characteristics  
(PerLeg)

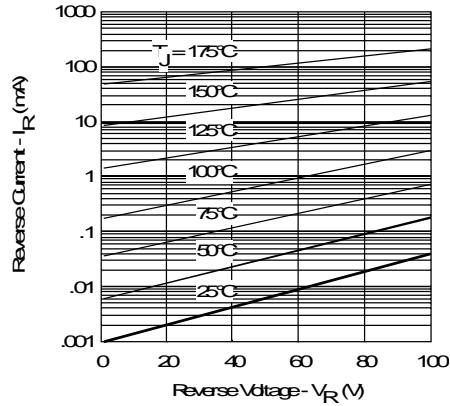


Fig. 2-Typical Values Of Reverse Current  
Vs. Reverse Voltage (PerLeg)

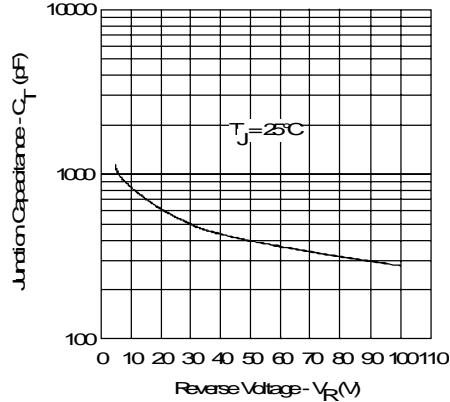


Fig. 3-Typical Junction Capacitance  
Vs. Reverse Voltage (PerLeg)

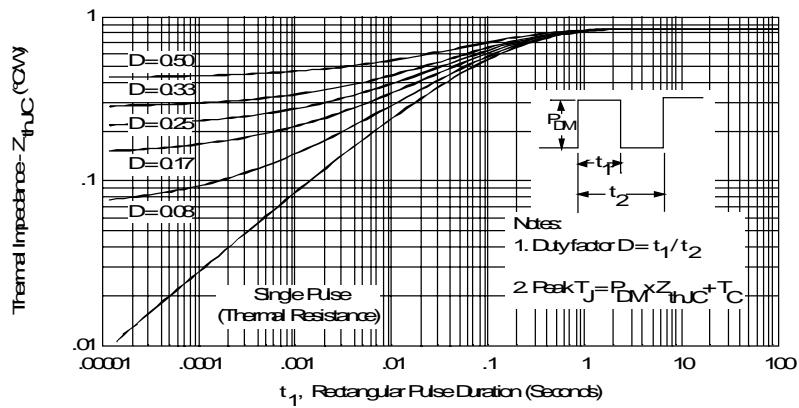


Fig. 4-Max. Thermal Impedance  $Z_{thJC}$  Characteristics (PerLeg)

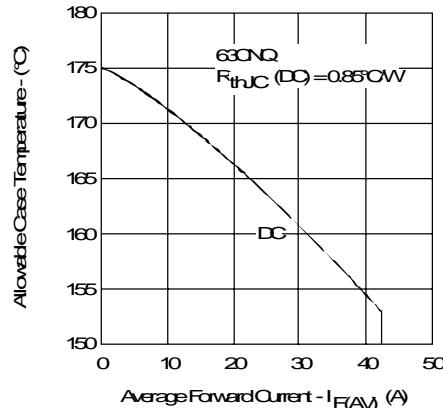


Fig.5-Max. Allowable Case Temperature Vs. Average Forward Current (PerLeg)

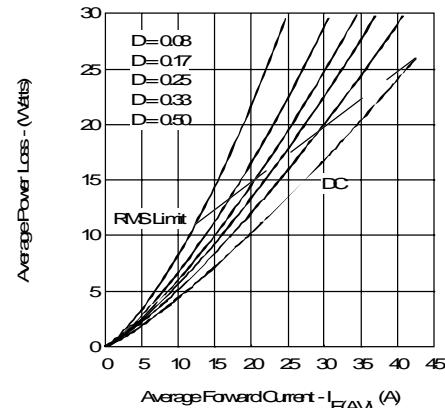


Fig.6-Forward Power Loss Characteristics (PerLeg)

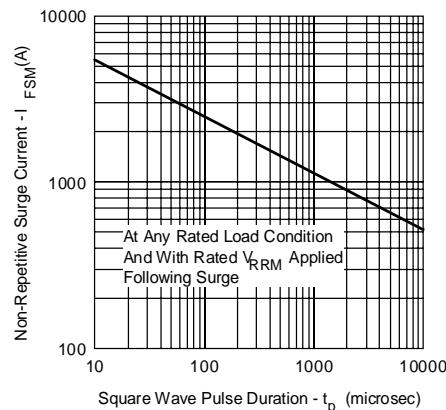


Fig.7-Max. Non-Repetitive Surge Current (PerLeg)

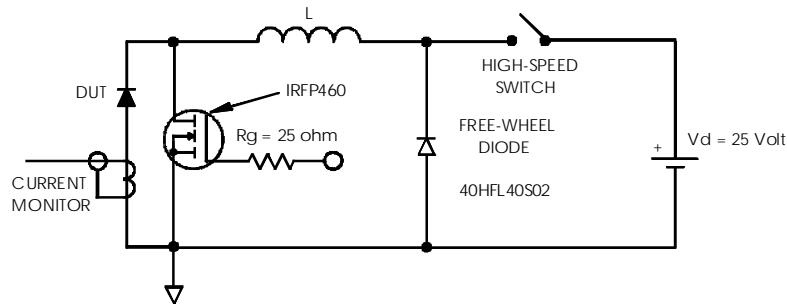


Fig.8-Unclamped Inductive Test Circuit