

Marketing Bulletin

DATE: September 20th, 2006

TO: All Sales Personnel

FROM: Mark Stoner

RE: Product Termination

To all concerned parties,


This bulletin is to notify all customers of the discontinuation of the following Ecliptek series effective September 20th, 2006:

Series	Description	Recommended Replacement
EC14	5V 4 pad SMD Plastic Oscillator	EP14 or EH14

In compliance with our End of Life (EOL) policy, this will serve as advanced notice of product termination. New orders will not be accepted after March 31st, 2007, with delivery to conclude by September 30th 2007.

If there are any questions pertaining to this bulletin, please feel free to contact me. Thank you again for your cooperation.


Best Regards,



Mark W. Stoner
Vice President of Marketing
Ecliptek Corporation

EC14 Series

- Plastic surface mount package
- 5.0V supply voltage
- HCMOS/TTL output
- Stability to ± 50 ppm
- Available on tape and reel

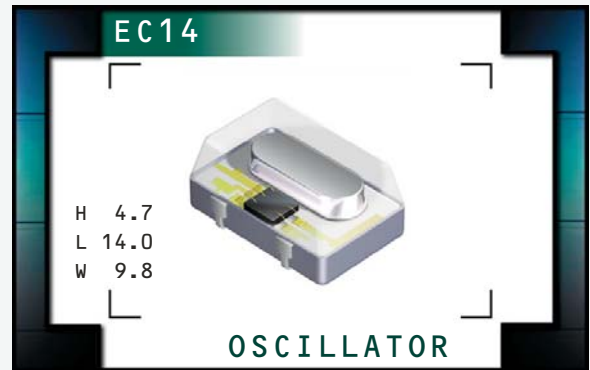

OBSOLETE

ELECTRICAL SPECIFICATIONS

Frequency Range (MHz)		1.000MHz to 66.667MHz
Operating Temperature Range		0°C to 70°C or -40°C to 85°C (≤ 30.000 MHz)
Storage Temperature Range		-55°C to 125°C
Supply Voltage (V_{DD})		5.0V _{DC} $\pm 10\%$
Frequency Tolerance / Stability*	Inclusive of Operating Temperature Range, Supply Voltage, and Load	± 100 ppm Maximum or ± 50 ppm Maximum (0°C to 70°C Only)
Input Current	≤ 30.000 MHz 30.001MHz to 50.000MHz >50.000MHz	23mA Maximum (Unloaded) 35mA Maximum (Unloaded) 50mA Maximum (Unloaded)
Load Drive Capability	≤ 53.125 MHz >53.125MHz	10TTL Load or 50pF HCMOS Load 15pF HCMOS Load
Output Voltage Logic High (V_{OH})	w/TTL Load w/HCMOS Load	2.4V _{DC} Minimum $I_{OH} = -16$ mA $V_{DD} - 0.5V_{DC}$ Minimum $I_{OH} = -16$ mA
Output Voltage Logic Low (V_{OL})	w/TTL Load w/HCMOS Load	0.4V _{DC} Maximum $I_{OL} = +16$ mA 0.5V _{DC} Maximum $I_{OL} = +16$ mA
Duty Cycle	at 50% of waveform w/HCMOS Load at 1.4V _{DC} w/TTL Load at 1.4V _{DC} w/HCMOS Load or w/TTL Load	50 ± 10 (%) (Standard) 50 ± 5 (%) (Optional)
Rise Time / Fall Time	20% to 80% of waveform w/HCMOS Load; 0.4V _{DC} to 2.4V _{DC} w/TTL Load	8 nSeconds Maximum
Aging (at 25°C)		± 5 ppm / year Maximum
Tri-State Input Voltage	No Connection $V_{IH} : \geq 2.0V_{DC}$ $V_{IL} : \leq 0.8V_{DC}$	Enables Output Enables Output Disables Output: High Impedance
Start Up Time	1.000MHz to 26.000MHz 26.001MHz to 66.667MHz	4 mSeconds Maximum 10 mSeconds Maximum
Period Jitter: Absolute		± 100 ppSeconds Maximum
Period Jitter: One Sigma		± 25 ppSeconds Maximum

PART NUMBERING GUIDE

EC14 00 SJ ET TS - 25.000M TR

FREQUENCY TOLERANCE / STABILITY

00=±100ppm Maximum (Standard)
45=±50ppm Maximum

OPERATING TEMP. RANGE

Blank=0°C to 70°C
ET=-40°C to 85°C

DUTY CYCLE

Blank=50 ±10(%) (Standard)
T=50 ±5(%)

PACKAGING OPTIONS

Blank=Bulk
TR=Tape and Reel (Standard)


FREQUENCY

OUTPUT CONTROL FUNCTION

TS=Tri-State Enable High

OBSOLETE


MECHANICAL DIMENSIONS
ALL DIMENSIONS IN MILLIMETERS

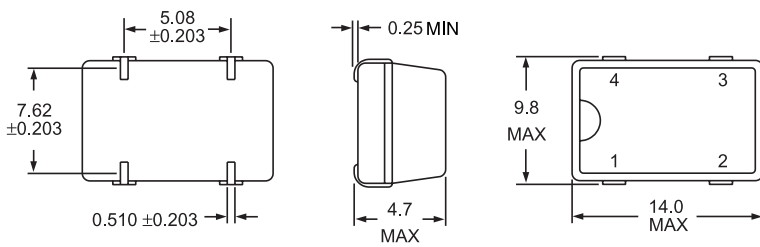

Pin 1: Tri-State
Pin 2: Case Ground


Pin 3: Output
Pin 4: Supply Voltage

SUGGESTED SOLDER PAD LAYOUT
ALL DIMENSIONS IN MILLIMETERS

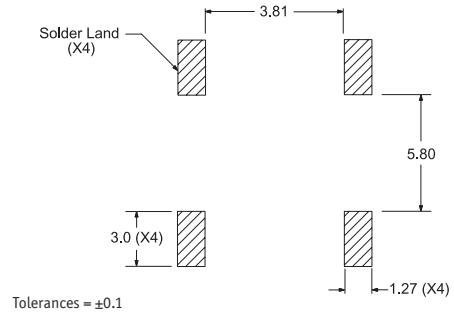


Tolerances = ±0.1

TAPE AND REEL DIMENSIONS
ALL DIMENSIONS IN MILLIMETERS

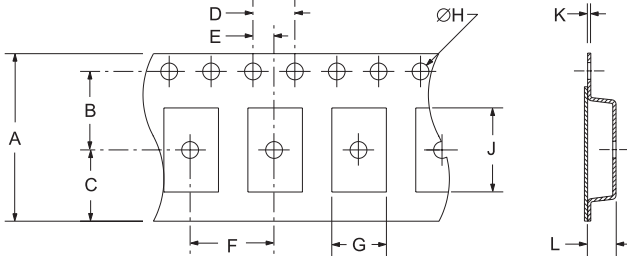

TAPE	A	B	C	D	E
	24 ±.3	11.5 ±.1	10.75 ±.1	4 ±.2	2 ±.1
F	G	H	J	K	L
12 ±.2	B0*	1.5 +.1-0	A0*	.3 ±.1	K0*

*Compliant to EIA 481A

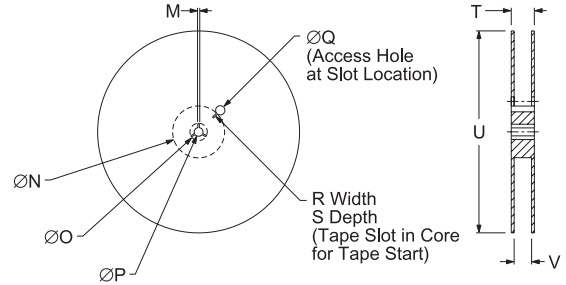

REEL	M	N	O	P	Q
	1.5 MIN	50 MIN	20.2 MIN	13 ±.2	40 MIN
R	S	T	U	V	QTY/REEL
2.5 MIN	10 MIN	30.4 MAX	360 MAX	24.4 ±2-0	1,000

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

Characteristic	Specification
Seal Integrity	Bubble test in Perfluorocarbon at +125°C ±5°C for 60 seconds minimum (internal crystal only).
Solderability	Sn63 Solder dip at +230°C ±5°C for 5 seconds/95% coverage.
Marking Permanency	10 Strokes with brush after 1 minute soak in solvent, 3 times.
Shock	Random drop on hard wooden plate 3 times from a height of 20cm.
Vibration	Frequency with an amplitude of 1.5mm sweeping between 10Hz to 55Hz within 1 minute (approximately) for 2 hours minimum on each axis (X, Y and Z) for a total of 6 hours.

MARKING SPECIFICATIONS

Line 1: ECLIPTEK

Line 2: XX.XXX M
Frequency in MHz (5 Digits Maximum + Decimal)

Line 3: XX Y ZZ
Week of Year
Last Digit of Year
Eclipse Manufacturing Identifier

MANUFACTURER	CATEGORY	SERIES	PACKAGE	VOLTAGE	CLASS	REV. DATE
ECLIPTEK CORP.	OSCILLATOR	EC14	PLASTIC	5.0V	OS33	08/06