

CPT-18-6007

Temperature Compensated Amplifier

6 GHz - 18 GHz

This Amplifier offers exceptional performance over the band 6 GHz to 18 GHz with 20 dBm P1dB output power and 35 dB Gain.

Teledyne Microwave amplifiers are balanced or feedback designs and manufactured with the latest MIC & MMIC technology. The GaAs FET's used in these amplifiers are well established proven devices from multiple sources.

Teledyne Microwave offers a complete line of Narrow and broadband Amplifiers covering the frequency range 500 MHz to 40 GHz. These products are available in either connectorized packages or as modules. For a complete list of these products and more, please visit our website.

Other products from Teledyne Microwave include: Transceivers, Synthesizers, and YIG Products



Specifications:

Model Number: CPT-18-6007
Frequency Range: 6 GHz - 18 GHz
Gain (min): 35 dB
Gain Vs Temp at any Frequency: +/-2 dB
Noise Figure (max): 8 dB
Output Power @ 1dB Compression: 20 dBm
Gain Flatness Vs Frequency: +/-2.5 dB
3rd Order Intercept (Typ): 28 dBm
Power Supply:
 Input Voltage: 11.5 to 15 VDC
 Current @ 12 VDC (typ): 570 mA
 Current @ 12 VDC (max): 655 mA
Case Type (See attached Outline): SX8
Temperature Range: -54 to +90C



ISO 9001:2000

1274 Terra Bella Avenue, Mountain View, CA 94043 • PHN# 800.832.6869 or +1.650.962.6944 • FAX# 650.962.6845
www.teledynemicrowave.com • microwave@teledyne.com


All Specifications are subject to change. Please contact Teledyne Microwave for the latest information on this product

08/05

CPT-18-6007

Temperature Compensated Amplifier

6 GHz - 18 GHz

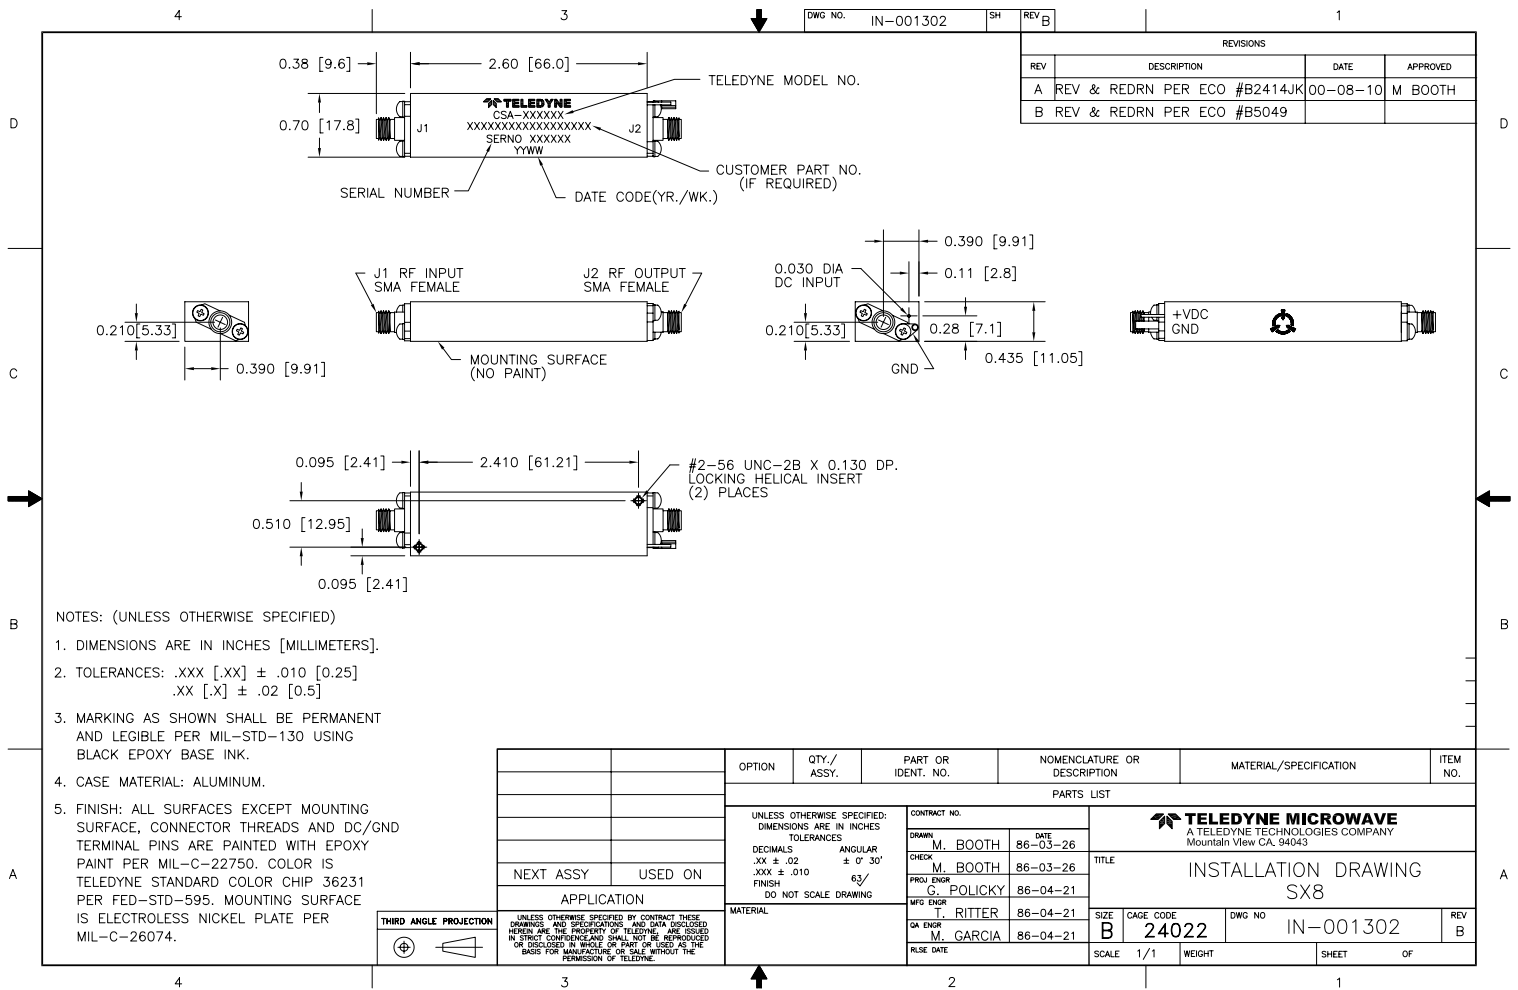

ISO 9001:2000

1274 Terra Bella Avenue, Mountain View, CA 94043 • PHN# 800.832.6869 or +1.650.962.6944 • FAX# 650.962.6845
 www.teledynemicrowave.com • microwave@teledyne.com

All Specifications are subject to change. Please contact Teledyne Microwave for the latest information on this product

08/05