#### CPT-18-6038

# **Temperature Compensated Power Amplifier**

## 6 GHz - 18 GHz

This Power Amplifier offers exceptional performance over the band 6 GHz to 18 GHz with 30 dBm P1dB output power and 37 dB Gain.

Teledyne Microwave amplifiers are balanced or feedback designs and manufactured with the latest MIC & MMIC technology. The GaAs FET's used in these amplifiers are well established proven devices from multiple sources.

Teledyne Microwave offers a complete line of Narrow and broadband Amplifiers covering the frequency range 500 MHz to 40 GHz. These products are available in either connectorized packages or as modules. For a complete list of these products and more, please visit our website.



Other products from Teledyne Microwave include: Transceivers, Synthesizers, and YIG Products

Specifications:

Model Number: CPT-18-6038 Frequency Range: 6 GHz – 18 GHz Gain (min): 37 dB Gain Vs Temp at any Frequency:  $+/-1.25 \, dB$ Noise Figure (max): 12 dB Output Power @ 1dB Compression: 30 dBm Gain Flatness Vs Frequency: +/-2 dB 3<sup>rd</sup> Order Intercept (Typ): 36 dBm Power Supply: Input Voltage: 11.5 to 15 VDC Current @ 12 VDC (typ): 3740 mA Current @ 12 VDC (max): Contact Factory Case Type (See attached Outline): HPX10 Temperature Range: -54 to +90C




ISO 9001:2000

1274 Terra Bella Avenue, Mountain View, CA 94043 • PHN# 800.832.6869 or +1.650.962.6944 • FAX# 650.962.6845 www.teledynemicrowave.com • microwave@teledyne.com

#### CPT-18-6038

**Temperature Compensated Power Amplifier** 

## 6 GHz - 18 GHz

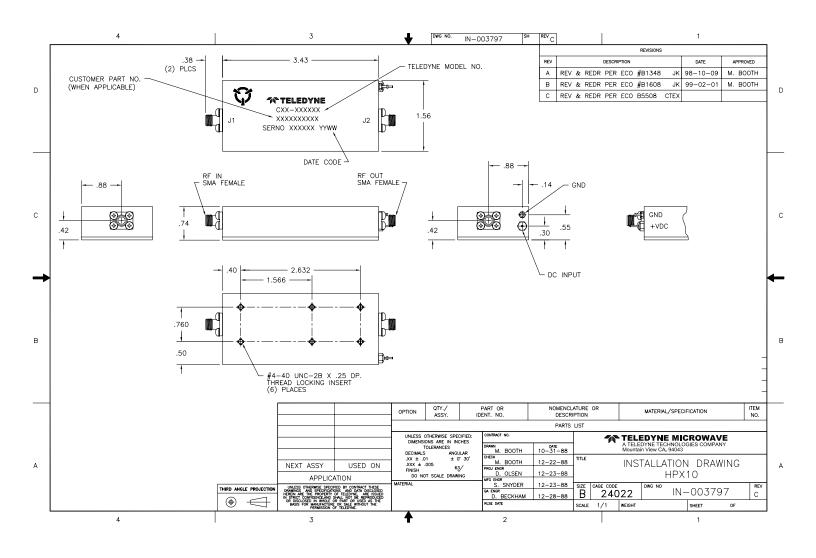

TELEDYNE MICROWAVE

ISO 9001:2000

1274 Terra Bella Avenue, Mountain View, CA 94043 • PHN# 800.832.6869 or +1.650.962.6944 • FAX# 650.962.6845 www.teledynemicrowave.com • microwave@teledyne.com