

ATTENUATORS

TYPE N

up to 6 GHz

100 Watts



MODELS: XN100W-XX, XN100W-XXF & XN100W-XXM

SPECIFICATIONS:


Electrical:

Frequency Range	DC - 6.0 GHz		
Standard Freq. Values	1.5, 3 & 6 GHz		
Standard dB Values	1, 3, 6, 10, 20, 30 & 40* dB		
Attenuation Accuracy	DC - 1.5 GHz	1.5 - 3 GHz	3 - 6 GHz
1 - 6 dB	±0.50 dB	±0.50 dB	±0.75 dB
10 - 40 dB	±0.50 dB	±0.75 dB	±1.0 dB
VSWR (Max.)	1.15:1	1.25:1	1.35:1
Input Power	100 Watts Avg.		
	Derated Linearly to 20 Watts @ +125°C.		
Output Power	20 Watts Avg.		
Peak Power	5 kW Max.		
	(5uSec Pulse, .05% Duty Cycle)		
Impedance	50 Ohms		
Operating Temp Range	-54°C to +125°C		

Mechanical:

Type N Connectors	Passivated Stainless Steel
	Mates with MIL-STD-348
Conductors	Gold Plated Beryllium Copper
Housing	Anodized Aluminum
*40 dB Units are only available up to 4 GHz	

Custom Mtg. hole Config. may be Added to this Surface

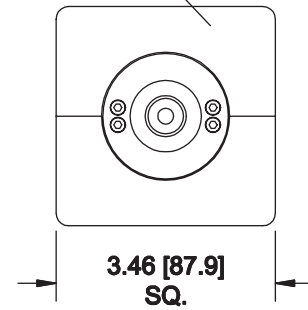

END VIEW TYPICAL


Units must be Mounted in such a way as to Allow for Free Air Flow Around fins to Assure Performance

Note: Units are Unidirectional, Therefore Input Connector MUST be specified & will be Indicated on Unit

Model Number: **XN100W-XX**
Male/Female Connectors
Length: 6.36 ±0.05 [161.5 ±1.3]
Pictured

Model Number: **XN100W-XXF**
Female/Female Connectors
Length: 6.45 ±0.05 [163.8 ±1.3]

Model Number: **XN100W-XXM**
Male/Male Connectors
Length: 6.28 ±0.05 [159.5 ±1.3]

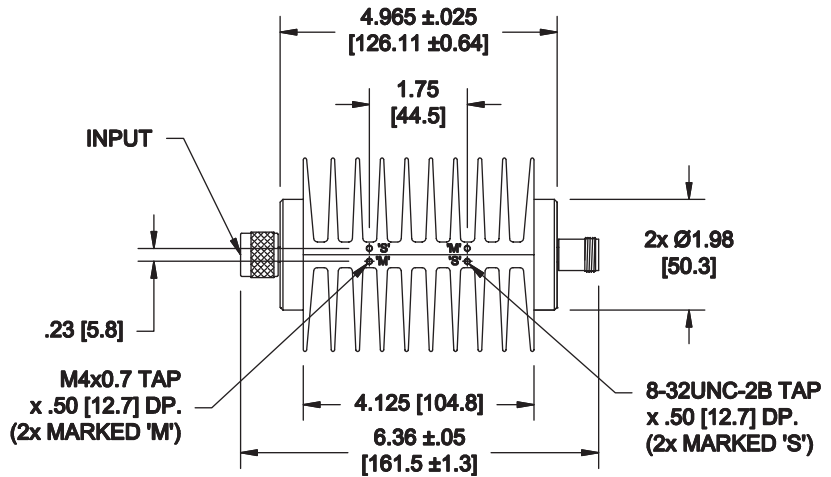

HOW TO ORDER:

Model Number: **XN100W-XXY**

Freq. Range
1 = DC - 1.5 GHz
3 = DC - 3 GHz
6 = DC - 6 GHz

Connector Configuration
= Male/Female
F = Fem/Fem
M = Male/Male
dB Value

Ordering Examples:

Model Number: **1N100W-1**
DC - 1.5 GHz, 1 dB; Type N - Male/Fem

Model Number: **3N100W-3F**
DC - 3 GHz, 3 dB; Type N - Fem/Fem

Model Number: **6N100W-20M**
DC 6 GHz 20 dB Type N Male/Male

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
*Other dB values are also available. Units that operate over a more specific wave band and/or offer very low return loss (VSWR) or offer higher peak power are available.

XN100W-ATT; REV J