



100ML

DELTRON

controls



DIVISION OF DELTRON CORP.

100ML SERIES GENERAL PURPOSE MAGNETIC LATCHING RELAYS

FEATURES

- Inexpensive, General Purpose Latching Relays
- Pole Configuration Up to 6PDT
- Molded Class F Coils Handle High Ambient Temperatures, Resist Moisture and Dust
- Snap Action, One Piece Armature Eliminates Interconnections
- No Power Required to Maintain Contact Status - Only a Pulse to Change

CONTACT DATA

CONFIGURATION:

Thru 6PDT

MATERIALS:

5 AMP:

- 1/8" Diameter Moveable Fine Silver
- 3/16" Diameter Stationary Fine Silver

10 AMP:

- 3/16" Diameter Moveable Silver Cadmium Oxide
- 3/16" Diameter Stationary Fine Silver

Gold Flash is Standard on All Contacts

Gold Diffused Available on Special Order - Min. Qty. Req'd.

CONTACT RATINGS

MOVEABLE CONTACT SIZE	POLE CONFIGURATION	UL RATINGS**
1/8" Diameter	SPDT	5 amp or 1/8 HP at 120 VAC
	DPDT	
	3PDT	5 amp or 1/4 HP at 277VAC
	4PDT	
	5PDT	5 amp at 28VDC
	6PDT	
3/16" Diameter	SPDT	10 amp or 1/3 HP at 120 VAC*
	DPDT	
	3PDT	10 amp or 1/2 HP at 277VAC
	4PDT	
	5PDT	10 amp at 28VDC
	6PDT	

* 3 Pole and 6 Pole Rated at 6-2/3 Amp When Switching Greater Than 150VAC Unless Polarity is the Same on All Poles

** UL and CSA on Model 100ML and 101ML Only

UL RECOGNIZED FILE NO.: E37066

CSA CERTIFIED FILE NO.: LR20690

EXPECTED LIFE

Electrical At Rated Load (Minimum)
100,000 Operations

Mechanical Life

10,000,000 Operations

DIELECTRIC STRENGTH

- 800 VRMS, 60 Hz Between Contacts
- 2200 VRMS, 60 Hz Between Other Elements

MODELS

100ML: 5 Amp Latching Relay

101ML: 10 Amp Latching Relay

102ML: 5 & 10 Amp Latching Relay. No UL or CSA Recognition

103ML: 5 & 10 Amp Latching Relay Polarized for Applications Requiring Rejection of Wrong Signals Responds to External Change in Operating Polarity. No UL Or CSA Recognition



COIL DATA

	NOMINAL VOLTAGE	RESISTANCE IN OHMS ± 10%	NOMINAL COIL POWER
AC Coils	6VAC	4.5	3.5VA
	12VAC	18	
	24VAC	72	
	120VAC	1850	
	240VAC	7200	
DC Coils	6VDC	20	2W
	12VDC	80	
	24VDC	315	
	110VDC	6800	

Coil Voltages: AC: Up to 277 Volts/60 Hz
DC: Up to 125 Volts

Coil Treatment: Molded Rynite® Std. Class F

Insulation Resistance: 100 Megohms Minimum

UL Insulation System File No.: E74443

S155D 155°C Total Temperature Std.

(Covers S105 Class A and S130D Class B Requirements)

OPERATE DATA

Pick Up (at 25°C): AC Volts 85% or Less of Nominal
DC Volts 75% or Less of Nominal

Operate Time: Approx. 20 Milliseconds

Release Time: Approx. 20 Milliseconds

ENVIRONMENTAL DATA

Operating Ambient: AC: -45° to 85°C
DC: -45° to 100°C

Coil Temperature Rise: (25°C Ambient – Continuous Duty)

AC: 45°C Approx. @ 60 Hz – Use at 50 Hz

will Cause Slight Increase in Coil Rise


DC: 45°C Approx.

MECHANICAL DATA


Terminals: All Versions Pierced Solder Lugs

Weight: Approx. 5 oz. (142 g)

DIMENSIONS [Unit Inch (mm)]

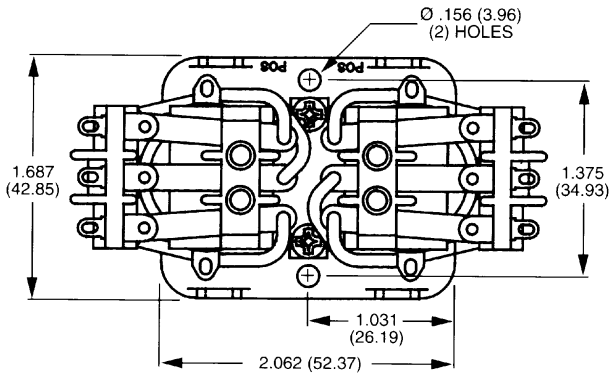


100ML/101ML

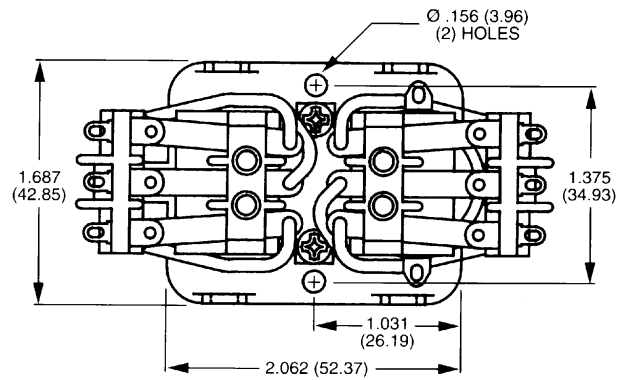


103ML

(102ML Dimensions Same as 103ML, but with Second Coil Added)

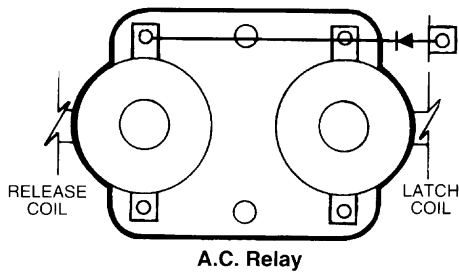

A.C. Relay

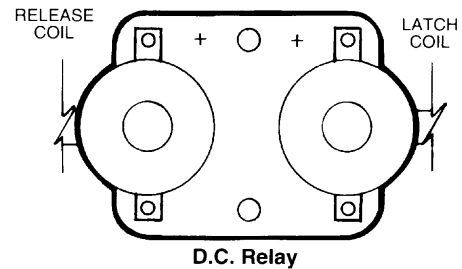

D.C. Relay

Note: Polarity Indicated Must be Observed

ORDERING INFORMATION

5 AMP Part Numbers

MODEL	POLE CONFIG.	AC Coils			DC Coils		
		24VAC	120VAC	240VAC	12VDC	24VDC	110VDC
100ML	4PDT	20351-82	20351-83	20351-84	20024-81	20024-82	20024-83
	6PDT	20355-82	20355-83	20355-84	20026-81	20026-82	20026-83
102ML	4PDT	20028-82	20028-83	20028-84	---	---	---
	6PDT	20030-82	20030-83	20030-84	---	---	---

10 AMP Part Numbers

101ML	4PDT	20352-82	20352-83	20352-84	20025-81	20025-82	20025-83
	6PDT	20356-82	20356-83	20356-84	20027-81	20027-82	20027-83
102ML	4PDT	20029-82	20029-83	20029-84	---	---	---
	6PDT	20031-82	20031-83	20031-84	---	---	---

Blue Items Are Non Stock. Minimum Quantity May Be Required.