


# SERIES 30

## REED RELAY

# REED RELAYS SERIES 30

### DIMENSIONS UNIT (INCH) CONTINUED

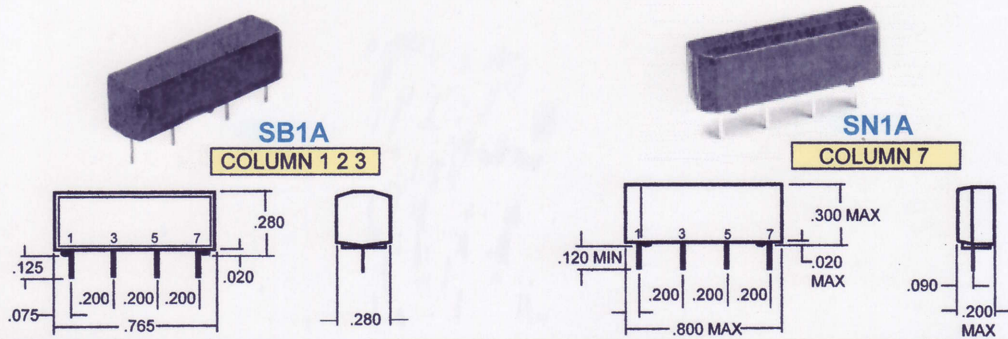

### COIL RATINGS

NOMINAL COIL VOLTAGE	PICK UP VDC MAXIMUM @ 20 DEG. C	DROP OUT VDC MINIMUM @ 20 DEG. C	PART NUMBER							
			1 FORM A (SPST)	1 FORM B (SPST)	1 FORM A (SPST)	1 FORM A (SPST) HIGH POWER	1 FORM A (SPST) HIGH VOLTAGE	1 FORM C1 (SPDT)	1 FORM A (SPST)	
5	3.8	0.5	SB1A05A	SB1B05B	SD1A05A	SD1A05D	SD1A05H	SC1C05	SN1A05A	
12	8.0	1.0	SB1A12A	SB1B12B	SD1A12A	SD1A12D	SD1A12H	SC1C12	SN1A12A	
24	16.0	2.0	SB1A24A	SB1B24B	SD1A24A	SD1A24D	SD1A24H	SC1C24	SN1A24A	
COIL RESISTANCE + \ - 10% @ 20 DEG. C			500 850 2200	500 500 1750	500 500 2000	500 500 2000	500 500 2000	200 500 2000	500 1000 1400	
FOOT PRINTS										
COLUMN NUMBER			1	2	3	4	5	6	7	

### ORDERING INFORMATION


#### GLOSSARY

- M - MAGNETIC SHIELD
- E - ELECTROSTATIC SHIELD
- ∧ - DIODE

#### SPECIAL NOTES

- ( ) ADD THE NEEDED DASH NUMBER TO THE END OF THE PART NUMBER WHEN SPECIAL NEEDS ARE REQUIRED.
- (-1) MAGNETIC SHIELD
- (-2) MAGNETIC SHIELD & ELECTROSTATIC SHIELD (OFFERED ON SD TYPE ONLY)
- (-3) DIODE (OFFERED ON SB TYPE ONLY)
- (-4) DIODE & MAGNETIC SHIELD (OFFERED ON SB TYPE ONLY)

#### PART NUMBER BREAKDOWN

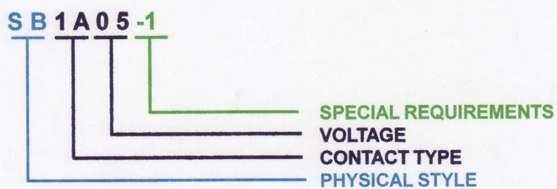

EXTENSIVE CATALOG INFORMATION ON THE INTERNET  
[WWW.USRELAYS.COM](http://WWW.USRELAYS.COM)



FOR YOUR CONVENIENCE JUST CHARGE IT!

**US RELAYS AND TECHNOLOGY, INC.**  
 13851 ROSWELL AVENUE UNITS F/G CHINO, CA. 91710 U.S.A.

TEL (909) 902-5112  
 FAX (909) 902-5122  
[WWW.USRELAYS.COM](http://WWW.USRELAYS.COM)