


200 SERIES - Choke Coils

Coils are wound on phenolic forms, employing solenoid type winding, single layer. Coil form sizes are shown in chart below and leads are No.20 AWG 1-1/2" long. Leads on the larger forms (No.208 through No.220) are reinforced at the form to prevent breaking the coil wire if, in assembly, a sharp bend is made in the lead. These coils are impregnated with thermosetting varnish. The following values are available for delivery from stock. For color coding charges see price sheet.

INDUCTANCE TOLERANCES: No.200 THROUGH No.205, 15%
No.206 THROUGH No.220, 10%

200 SERIES

WILCO PART #	L uh	Q NOM.	S.R.F. NOM. (MHz)	R.D.C. OHMs NOM.	I (MA) MAX	DIA. NOM.	TEST FREQ. (MHz)
200-11	.24	25	390	.06	1752	.145	25.0
201-11	.47	55	300	.08	1514	.145	"
202-11	.56	50	276	.09	1430	.145	"
203-11	.68	45	268	.10	1357	.145	"
204-11	.82	40	258	.11	1294	.145	"
205-11	1.0	35	236	.12	1356	.145	7.9
206-11	1.2	35	218	.14	1357	.145	"
207-11	1.5	35	198	.20	1207	.145	"
208-11	1.8	40	173	.20	1290	.176	"
209-11	2.2	45	158	.22	1305	.176	"
210-11	2.7	45	146	.30	1190	.176	"
211-11	3.3	50	127	.35	1285	.207	"
212-11	3.9	50	122	.38	1233	.207	"
213-11	4.7	55	109	.45	1186	.207	"
214-11	5.6	55	100	.53	1093	.207	"
215-11	6.8	66	94	.72	1053	.238	"
216-11	8.2	60	82	.80	971	.238	"
217-11	10.0	60	74	1.0	868	.238	"
218-11	11.0	60	67	1.1	968	.270	2.5
219-11	12.0	60	65	1.2	927	.270	"
220-11	15.0	45	57	2.0	664	.238	"

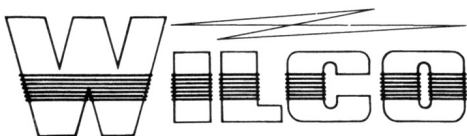

WILCO CORPORATION
6451 Saguaro Court
Indianapolis, Indiana 46268

VOICE (317) 293-9300
FAX (317) 293-9462
TOLL FREE HOTLINE (800) 611-2343