


CONNECTABALL - FEMALE

Dimensions in inches (mm)

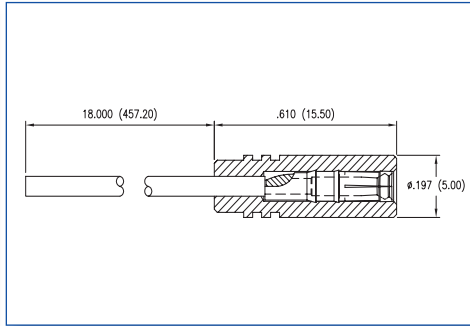

How to order code
445 - 860X - 01 - XX - XX

Basic Part No. | Finish | Colour

Material Code Table		
Component	Material	RoHS
Contact	Brass	✓
Insulator	PTFE	✓*
Wire	See Table	✓


Finish Code Table		
Dash No.	Finish	RoHS
-01	Silver	✓
-03	Gold (1.25µm 50µ")	✓
-93	Gold (0.25µm 10µ")	✓
-04	Electro - Tin	✓

Colour Code Table	
Dash No.	Colour
-10	Black
-12	Red*
-19	White

Basic Part No.	Wire Diameter	Wire Insulation	Max. Operating Current	Max. Contact Resistance	Connector Engaging Force (Max.)	Resistance to pull (Min.)
445-8600 -01	19 x 0.2mm	PTFE	3A	5 mΩ	60N	4.9N
445-8601 -01	28 x 0.15mm	PVC	3A	5 mΩ	60N	4.9N

*Red PTFE is not RoHS compliant

Dimensions in inches (mm)

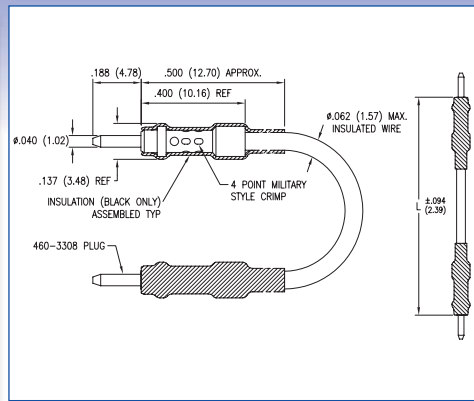

How to order code

445 - 3306 - XX - 03 - XX

Basic Part No.

Wire Colour

Plug Finish

Material Code Table			
Component	Material	RoHS	
Insulation	Polyolefin Plastic	✓	
Plug	Brass	✓	
Insulated Wire:	Wire	Copper	✓
	Insulation	PTFE	✓

Finish Code Table		
Dash No.	Plug Finish	RoHS
-03	Gold	✓

Wire Code Table			
Dash No.	Wire Colour	Dash No.	Wire Colour
-10*	Black	-15	Green
-11	Brown	-16*	Blue
-12*	Red	-17	Violet
-13	Orange	-18	Grey
-14	Yellow	-19	White

Basic Part No.	L
445-3306 -02	4.000 (101.60)
-03	6.000 (152.40)

Basic Part No.	L
445-3306 -04	8.000 (203.20)
-05	12.000 (304.80)

Wire Colour *Standard – Others to order

Wire Data Ref: #20 AWG, 7 Strands #28 AWG Silver Plated Copper Wire