



Features

- complies with ANSI and ETSI requirements
- matched to Infineons PEB22622, PEF22623 & PEF24622 chipsets
- very low THD
- 2000V minimum isolation
- all materials approved to UL94V-0
- excellent quality at competitive price due to high volume production
- manufactured in ISO-9001 approved Talema facility

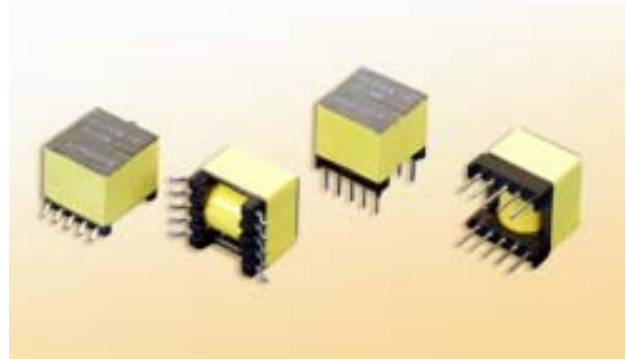

Electrical Specifications @ 25°C • Operating Temperature -40° to +85°C

Part Number	Package	Turns Ratio ±2% Line : IC:Sense	L _p (mH) ±10%	L _L (µH) Max.	DCR (Ohms Max.) Line / IC	DCR (Ohms Max.) Sense Winding	Isolation Voltage (Vrms)
SEP100-T	TH	3.2 : 1 : 1	3.0	25	4.0 / 0.80	4.0	2000
SEP100-S	SMD						

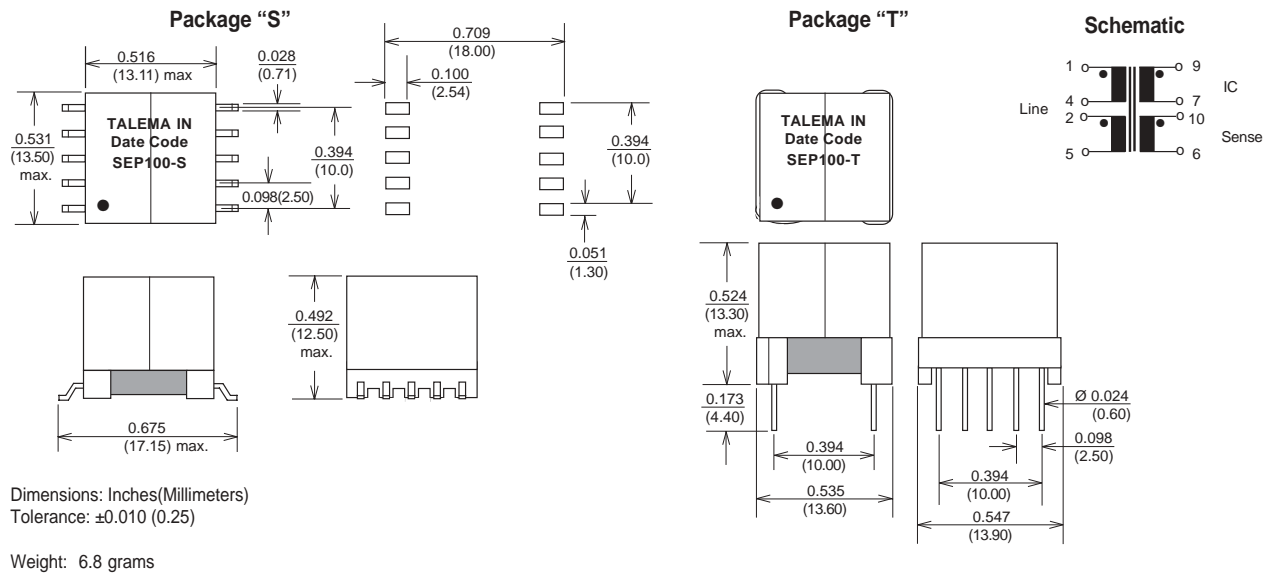

Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

Eastern Europe & Czech Republic

NT MAGNETICS s.r.o.
Jablonského 7
326 00 Pízeň
Tel: Int. + 420 37 - 744 9303
Fax: Int. + 420 37 - 744 3697
Email: talema@talema.cz

Germany

TALEMA ELEKTRONIK GMBH
Riesstr. 8, Postfach 2523
82110 Germering
Tel: Int. + 49 89 - 841 00 - 0
Fax: Int. + 49 89 - 841 00 25
Email: info@talema.isar.de

Ireland

NUVOTEM TEO.
Crolly
Co. Donegal
Tel: Int. + 353 74 - 954 8666
Fax: Int. + 353 74 - 954 8139
Email: info@nuvotem.com

India

TALEMA ELECTRONIC PVT. LTD.
Opposite the SIDCO Industrial Estate
Gins Towers
4/5S.H/1, Omalur Main Road
Salem - 636 004, Tamil Nadu
Tel: Int. + 91 427 - 244 1325
Fax: Int. + 91 427 - 243 0034
E-mail: talema@talemaindia.com

Talema Electronic • 101 West 10th Street • Rolla, MO (573) 364-2422 • Fax: (573) 364-5390
www.talema.com • Email: sales@talema.com