

# CEM9925



March 1998

## Dual N-Channel Enhancement Mode Field Effect Transistor

5

### FEATURES

- 20V , 5A ,  $R_{DS(ON)}=45m\Omega$  @ $V_{GS}=4.5V$ .  
 $R_{DS(ON)}=60m\Omega$  @ $V_{GS}=2.5V$ .
- Super high dense cell design for extremely low  $R_{DS(ON)}$ .
- High power and current handing capability.
- Surface Mount Package.



### ABSOLUTE MAXIMUM RATINGS ( $T_A=25^\circ C$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	$V_{DS}$	20	V
Gate-Source Voltage	$V_{GS}$	$\pm 8$	V
Drain Current-Continuous <sup>a</sup> @ $T_J=125^\circ C$ -Pulsed <sup>b</sup>	$I_D$	$\pm 5.0$	A
	$I_{DM}$	$\pm 48$	A
Drain-Source Diode Forward Current <sup>a</sup>	$I_S$	1.7	A
Maximum Power Dissipation <sup>a</sup>	$P_D$	2	W
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to 150	$^\circ C$

### THERMAL CHARACTERISTICS

Thermal Resistance, Junction-to-Ambient <sup>a</sup>	$R_{\theta JA}$	62.5	$^\circ C/W$
--	-----------------	------	--------------

# CEM9925

## ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

5

Parameter	Symbol	Condition	Min	Typ <sup>c</sup>	Max	Unit
<b>OFF CHARACTERISTICS</b>						
Drain-Source Breakdown Voltage	BVDSS	V <sub>GS</sub> =0V, I <sub>D</sub> =250μA	20			V
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> =10V, V <sub>GS</sub> =0V			1	μA
Gate-Body Leakage	I <sub>GSS</sub>	V <sub>GS</sub> = ±8V, V <sub>DS</sub> = 0V			±100	nA
<b>ON CHARACTERISTICS<sup>b</sup></b>						
Gate Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> = 250μA	0.5	0.75	1	V
Drain-Source On-State Resistance	R <sub>D(S(ON))</sub>	V <sub>GS</sub> =4.5V, I <sub>D</sub> = 5.0A		29	45	mΩ
		V <sub>GS</sub> =2.5V, I <sub>D</sub> = 1.0A		35	60	mΩ
On-State Drain Current	I <sub>D(ON)</sub>	V <sub>DS</sub> = 5V, V <sub>GS</sub> = 5V	10			A
Forward Transconductance	g <sub>F</sub>	V <sub>DS</sub> = 10V, I <sub>D</sub> = 5.0A	7	15		S
<b>DYNAMIC CHARACTERISTICS<sup>c</sup></b>						
Input Capacitance	C <sub>iss</sub>	V <sub>DS</sub> =10V, V <sub>GS</sub> = 0V f = 1.0MHz		920		pF
Output Capacitance	C <sub>oss</sub>			350		pF
Reverse Transfer Capacitance	C <sub>rss</sub>			98		pF
<b>SWITCHING CHARACTERISTICS<sup>c</sup></b>						
Turn-On Delay Time	t <sub>D(ON)</sub>	V <sub>DD</sub> = 6V, I <sub>D</sub> = 1A, V <sub>GEN</sub> = 4.5V, R <sub>L</sub> = 6Ω R <sub>GEN</sub> = 6Ω		23	32	ns
Rise Time	t <sub>r</sub>			23	32	ns
Turn-Off Delay Time	t <sub>D(OFF)</sub>			68	95	ns
Fall Time	t <sub>f</sub>			18	25	ns
Total Gate Charge	Q <sub>g</sub>			18	23	nC
Gate-Source Charge	Q <sub>gs</sub>	V <sub>DS</sub> = 6V, I <sub>D</sub> = 5.0A, V <sub>GS</sub> = 4.5V		3		nC
Gate-Drain Charge	Q <sub>gd</sub>			4		nC

# CEM9925

5

## ELECTRICAL CHARACTERISTICS ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ <sup>c</sup>	Max	Unit
<b>DRAIN-SOURCE DIODE CHARACTERISTICS<sup>b</sup></b>						
Diode Forward Voltage	$V_{SD}$	$V_{GS} = 0\text{V}$ , $I_S = 5.0\text{A}$		0.8	1.2	V

### Notes

- a. Surface Mounted on FR4 Board,  $t \leq 10\text{sec}$ .
- b. Pulse Test: Pulse Width  $\leq 300\ \mu\text{s}$ , Duty Cycle  $\leq 2\%$ .
- c. Guaranteed by design, not subject to production testing.

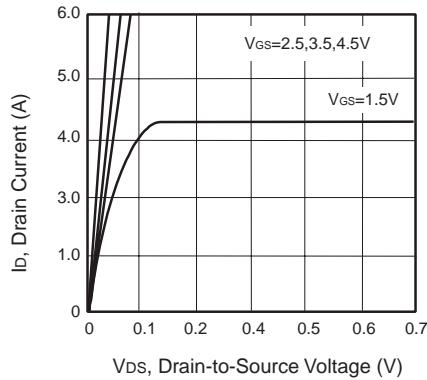


Figure 1. Output Characteristics

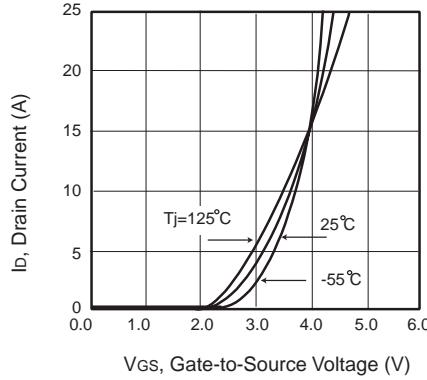


Figure 2. Transfer Characteristics

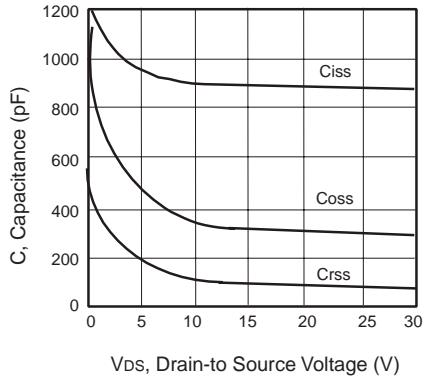


Figure 3. Capacitance


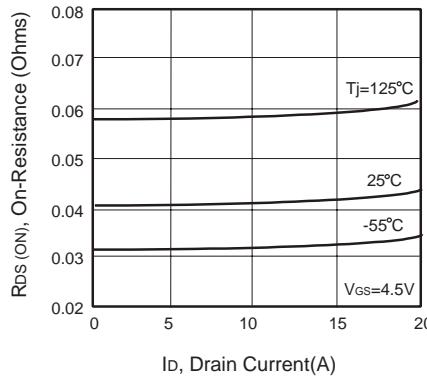



Figure 4. On-Resistance Variation with Drain Current and Temperature

# CEM9925


5

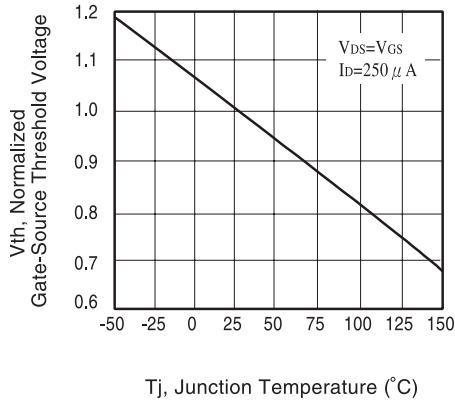


**Figure 5. Gate Threshold Variation with Temperature**

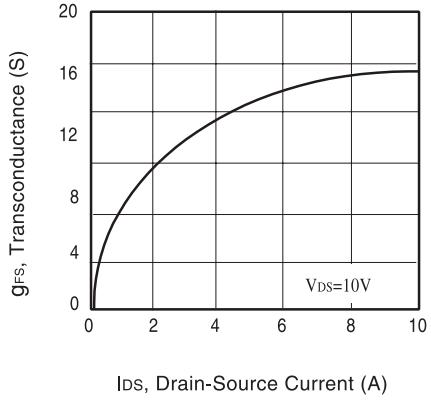


**Figure 7. Transconductance Variation with Drain Current**

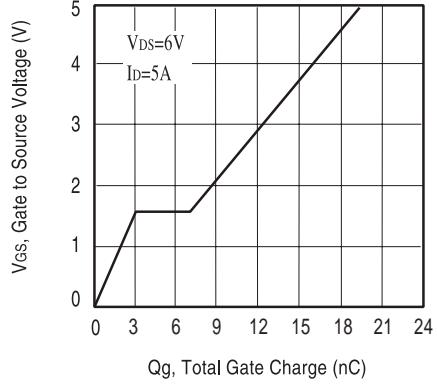


**Figure 9. Gate Charge**

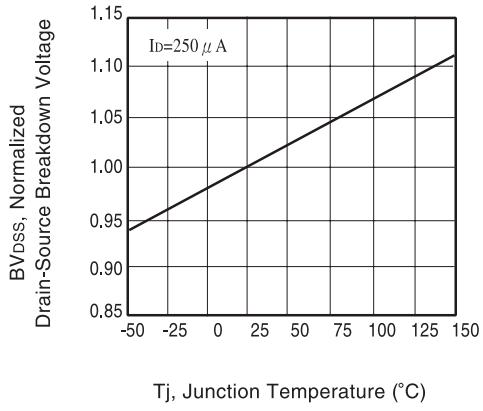

**Figure 6. Breakdown Voltage Variation with Temperature**

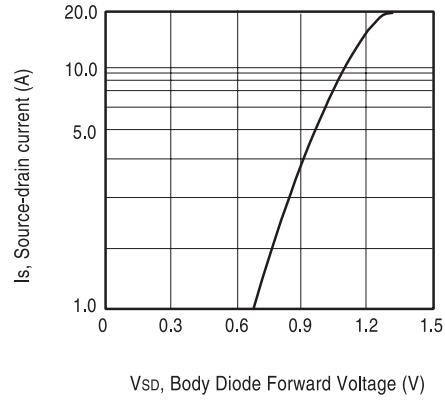

**Figure 8. Body Diode Forward Voltage Variation with Source Current**

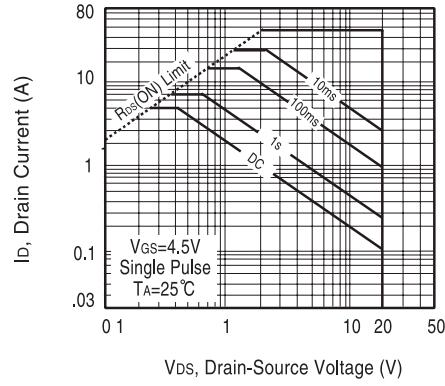

**Figure 10. Maximum Safe Operating Area**

# CEM9925

5

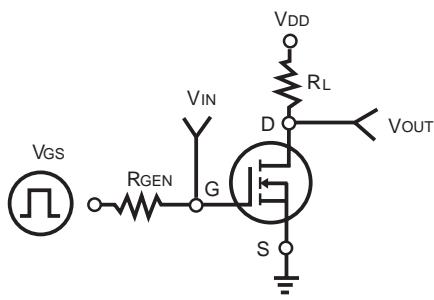


Figure 11. Switching Test Circuit

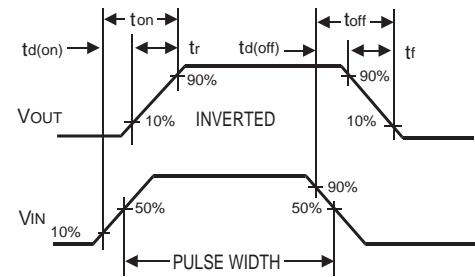


Figure 12. Switching Waveforms

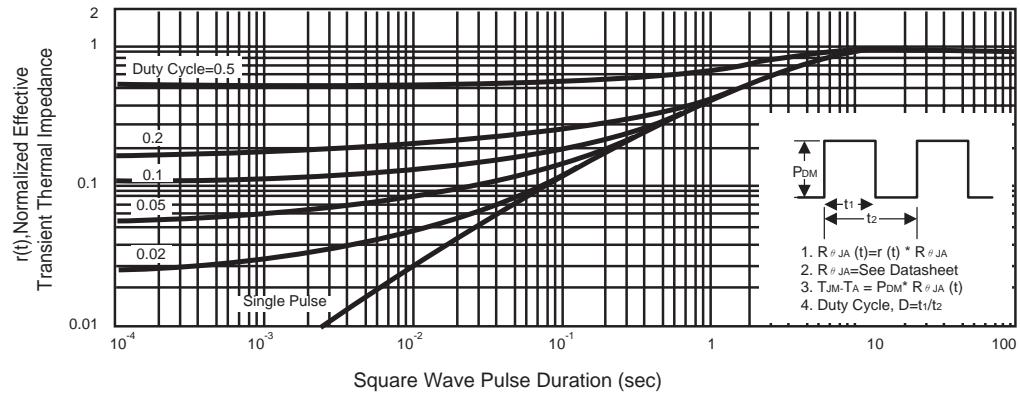


Figure 13. Normalized Thermal Transient Impedance Curve