

MA3056W

Silicon planer type

Constant voltage, constant current, waveform
clipper and surge absorption circuit

■ Features

- Mini type package (4-pin)
- Two-element wiring in parallel of MA3056

■ Absolute Maximum Ratings (Ta= 25°C)

Parameter	Symbol	Rating	Unit
Average forward current	Single IF(AV)	100	mA
	Double IF(AV)	75	mA
Instantaneous forward current	Single I _{FRM}	200	mA
	Double I _{FRM}	150	mA
Total power dissipation	Single P _{tot} * ¹	200	mW
	Double P _{tot} * ¹	150	mW
Non-repetitive reverse surge power dissipation	P _{ZSM} * ²	15	W
Junction temperature	T _j	150	°C
Storage temperature	T _{stg}	-55 to +150	°C

*¹ With a printed-circuit board

*² t=100μ s, T_j=150°C

■ Electrical Characteristics (Ta= 25°C)*¹

Parameter	Symbol	Condition	min	typ	max	Unit
Forward voltage	V _F	I _F =10mA		0.8	0.9	V
Zener voltage	V _Z * ²	I _Z = 5mA	5.3	5.6	6.0	V
Operating resistance	R _Z	I _Z = 5mA		15	40	Ω
Reverse current	I _R	V _R = 2V			1	μA
Temperature coefficient of zener voltage	S _Z * ³	I _Z = 5mA	-2.0	1.2	2.5	mV/°C
Terminal capacitance	C _D	V _R = 0V, f=1MHz		95	140	pF


Note 1. Rated input/output frequency : 5MHz

2. *¹ : The V_Z value is for the temperature of 25°C. In other cases, carry out the temperature compensation.

*² : Guaranteed at 20ms after power application

*³ : T_j= 25 to 125°C

■ Marking

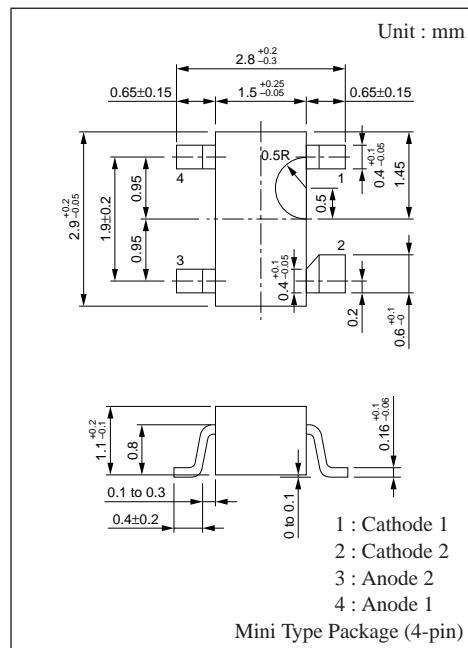

■ Internal Connection

