


Features

Available in ultra bright bi-color version
 Bi-color LED lamp
 White diffused lens

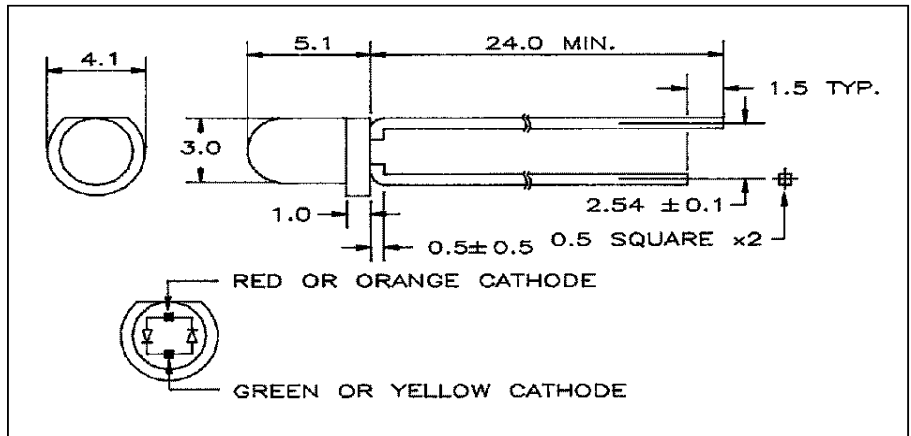

Series Line-Up

| Part Number | Color | Material |
|-------------|---------------------|----------|
| MT2030-HRG | High Efficiency Red | GaAsP |
| MT2030-HRG | Yellow Green | GaP |
| MT2030-RG | Red | GaP |
| MT2030-RG | Yellow Green | GaP |
| MT2030-YG | Pure Yellow | GaAsP |
| MT2030-YG | Yellow Green | GaP |

Maximum Ratings (Ta=25°C)

| Part Number | Forward Current I _F | Reverse Voltage V _R | Power Dissipation P _D | Operating Temperature T _{opr} | Storage Temperature T _{stg} |
|-------------|-----------------------------------|-----------------------------------|-------------------------------------|---|---|
| MT2030-HRG | 30 | 5 | 85.00 | -25 ~ +85 | -25 ~ +100 |
| MT2030-HRG | 30 | 5 | 85.00 | -25 ~ +85 | -25 ~ +100 |
| MT2030 RG | 30 | 5 | 85.00 | -25 ~ +85 | -25 ~ +100 |
| MT2030-RG | 30 | 5 | 85.00 | -25 ~ +85 | -25 ~ +100 |
| MT2030-YG | 30 | 5 | 85.00 | -25 ~ +85 | -25 ~ +100 |
| MT2030-YG | 30 | 5 | 85.00 | -25 ~ +85 | -25 ~ +100 |
| Unit | mA | V | mW | °C | °C |

Company Headquarters
 120 Broadway
 Menands, New York 12204
 Toll Free: 800.984.5337
 Fax: 518.432.7454

West Coast Sales Office
 100 Oceangate Blvd. #1200
 Long Beach, CA 90802
 Toll Free: 800.984.5337
 Fax: 562.628.5572

Electrical and Optical Characteristics (Ta=25°C)

| Part Number | PWL nm λ_P | Material | View Angle $2\theta_{1/2}$ | Luminous Intensity I_v | | | | Forward Voltage V_F | | | | Rev Current I_R | |
|-------------|-----------------------|----------|-------------------------------|-----------------------------|------|------|------|--------------------------|------|------|------|----------------------|-----|
| | | | | min. | typ. | max. | IF@ | min. | typ. | max. | IF@ | max. | VR@ |
| MT2030-HRG | 635 | GaAsP | 118° | - | 9.70 | - | 20mA | - | 2.10 | 3.00 | 20mA | 100 | 5V |
| | 567 | GaP | 118° | - | 8.30 | - | 20mA | - | 2.10 | 3.00 | 20mA | 100 | 5V |
| MT2030-RG | 700 | GaP | 118° | - | 8.00 | - | 20mA | - | 2.10 | 3.00 | 20mA | 100 | 5V |
| | 567 | GaP | 118° | - | 8.30 | - | 20mA | - | 2.10 | 3.00 | 20mA | 100 | 5V |
| MT2030-YG | 585 | GaAsP | 118° | - | 7.00 | - | 20mA | - | 2.10 | 3.00 | 20mA | 100 | 5V |
| | 567 | GaP | 118° | - | 8.30 | - | 20mA | - | 2.10 | 3.00 | 20mA | 100 | 5V |
| - | nm | - | deg | mcd | | | | - | V | | - | mA | - |

NOTES:

- All Dimensions are in millimeters.
- Tolerance is $\pm 0.25\text{mm}$ unless otherwise stated.
- An Epoxy Meniscus may extend about 1mm down the leads.
- Burr around bottom of epoxy may be around 0.5mm MAX.
- Specifications are subject to change without notice.

Company Headquarters
 120 Broadway
 Menands, New York 12204
 Toll Free: 800.984.5337
 Fax: 518.432.7454



Web: www.marktechopto.com | Email: info@marktechopto.com

West Coast Sales Office
 100 Oceangate Blvd. #1200
 Long Beach, CA 90802
 Toll Free: 800.984.5337
 Fax: 562.628.5572