

# E-Series Coupler

## 20 - 1000 MHz

### EMDC-16-1-75

V3.00

#### Features

- Coupling: +16 dB Typical
- Surface Mount

#### Specifications @ 25°C

Frequency Range	20 - 1000 MHz	
Coupling	Nominal	Flatness
20 - 1000 MHz	16 ±1.3 dB	1.4 dB
Main Line Loss	Typical	Maximum
20 - 200 MHz	0.5 dB	0.8 dB
200 - 500 MHz	0.3 dB	0.6 dB
500 - 1000 MHz	0.5 dB	1.0 dB
Directivity	Typical	Minimum
20 - 200 MHz	30 dB	20 dB
200 - 500 MHz	15 dB	10 dB
500 - 1000 MHz	9 dB	4 dB

#### Operating Characteristics

Impedance	75 Ohms Nominal
-----------	-----------------


#### Ordering Information

<b>Part No.</b>	<b>Packaging</b>
EMDC-16-1-75	Tube

#### Absolute Maximum Ratings

Parameter	Absolute Maximum
Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating/Storage Temp.	-20°C to +85°C

#### SM-55

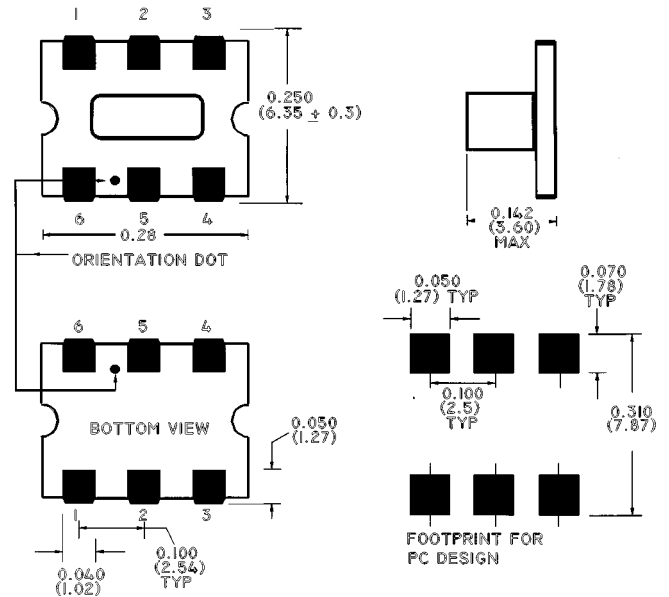

Dimensions in ( ) are in mm.  
 Unless Otherwise Noted: .x = ±0.04 (1.00)  
 .xx = ±0.02 (0.50)  
 .xxx = ±0.010 (0.250)

#### Pin Configuration

Function	Pin No.
Input	6
Output	1
Coupled	4
Ground	2,5
External 75 Ohms	3

S 1079 A