

IGNITION TRANSFORMERS


Spark-Line - Secondary External (2x)



- Compact Design
- Available up to 23kV
- Ambient Temperature 70°C
- Weight: 0.018kg
- Packaging unit: 45 pieces (tray)

| Part Number | Primary Resistance (±10%) (Pin 1-2) | Secondary Resistance (±10%) (Pin 6-7) | Primary Inductance (±15%) (Pin 1-2) | Secondary Inductance (±15%) (Pin 6-7) | Winding Ratio | Secondary Voltage @ load 30pF | Ambient Temperature | No-Load Operation (MAX) |
|-------------|--|--|--|--|---------------|-------------------------------|---------------------|-------------------------|
| 125-0035.0 | 26mΩ | 520Ω | 6μH | 240mH | 1:200 | >22kV | 70°C | 30s |
| 125-0049.0 | 59mΩ | 822Ω | 12μH | 340mH | 1:175 | >23kV | 70°C | 30s |

Mechanical

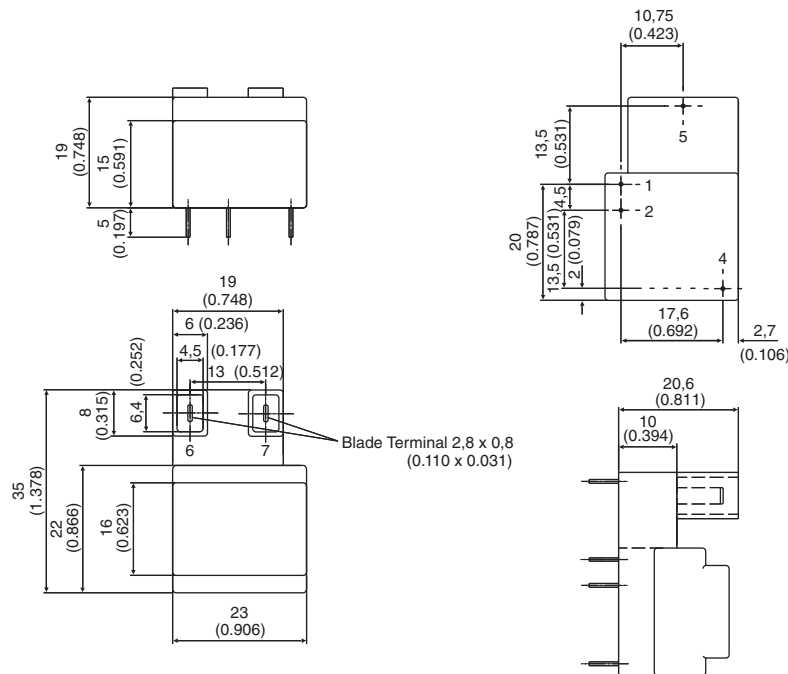

Schematic

