

Product Specification

GOODARK Type

MUR1260CT

Construction : Ultra Fast Recover diode

Application : For power switch


(Manufacturer) :

Suzhou Goodark Electronics Co.,Ltd

Prepared on Sep. 17th, 2008

Prepared: R & D Department

Approval :

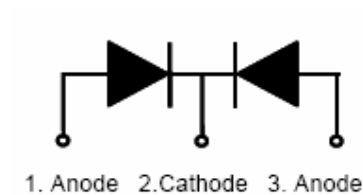


CONTENTS

1. Package Outline
2. Marking
3. Features& Mechanical Characteristics
4. Maximum Ratings and Electrical Characteristics
5. Rating and characteristic Curves
6. Packing Specification PACKAGING SPECIFICATION
7. Description of Box Label

1. Package Outline (TO220-AB)


UNIT:mm

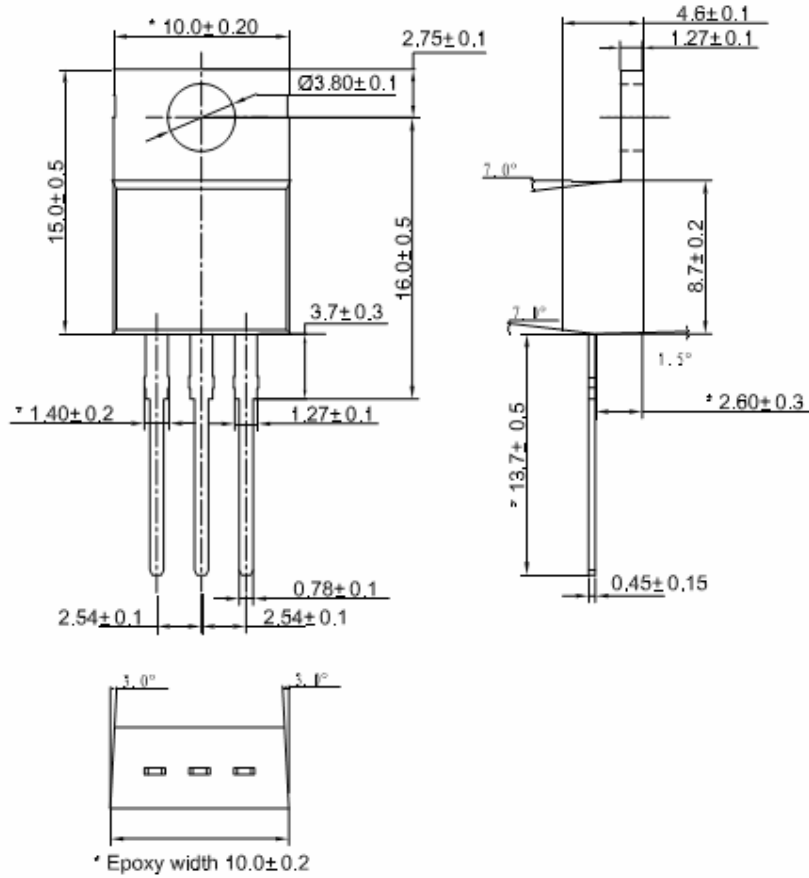

Lead Frame Material : Copper Plating: Pure Tin Plating


Plating Thickness : $8\mu\text{m}$ to $25.4\mu\text{m}$

2. MARKING

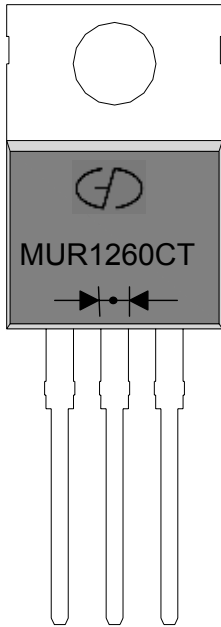

1. Part Name : MUR1260CT

2. Logo Mark: 

3. Polarity : 



3.Features& Mechanical Characteristics

Features

- Plastic package has underwriters Laboratory
Flammability Classification 94V-0
- Dual rectifier construction , positive center tap
- Metal of silicon rectifier , majority carrier conduction
- Low forward voltage , high efficiency
- Guarding for over voltage protection
- For use in low voltage , high frequency inverters ,
- Free wheeling , and polarity protection applications

Mechanical Characteristics

- Case : Epoxy , Molded
- Weight: 1.9grams (approximately)
- Finish : All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes : 260°C Max.for10 sec
- Shipped 50 units per plastic tube

4.Maximum Ratings and Electrical Characteristics

MAXIMUM RATINGS and ELECTRICAL CHARACTERISTICS(TC=25°C unless otherwise moted)					
PARAMETER	TEST CONDITIONS		SYMBOL	MUR1660CT	UNIT
Maximum repetitive peak reverse voltage			VRRM	600	V
Working peak reverse voltage			VRWM	600	V
Maximum DC blocking voltage			VDC	600	V
Maximum average forward rectified current at Tc=150°C total device per diode	Per Leg		IF(AV)	6	A
	Per device			12	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load per diode			IFSM	125	A
Operating junction temperature range			TJ	—65 to+150	°C
Storage temperature range			TSTG	—65 to+150	°C
Maximum instantaneous forward voltage per leg	IF=6A	TC=25	VF	1.40	V
	IF=6A	TC=125		1.15	
Maximum reverse current per leg at working peak Reverse voltage			IR	10	uA
				500	
Maximum Reverse Recover Time (If=0.5Amp, IR=1.0Amp,Irec=0.25Amp)	Trr		Trr	50	ns

Thermal Characteristics Ta=25 unless otherwise noted

Symbol	Parameter	Max	Unit
RθJC	Thermal Resistance , Junction to Case per Leg	2.0	°C /W
RθJA	Thermal Resistance , Junction to Ambient per Leg	62.5	°C /W

Note :

1. Screw mounting with 4-40 screw , where washer diameteris≤4.9mm(0.19 ")
2. Pulse test:300us pulse width,1% duty cycle

5. Rating and Characteristic Curves

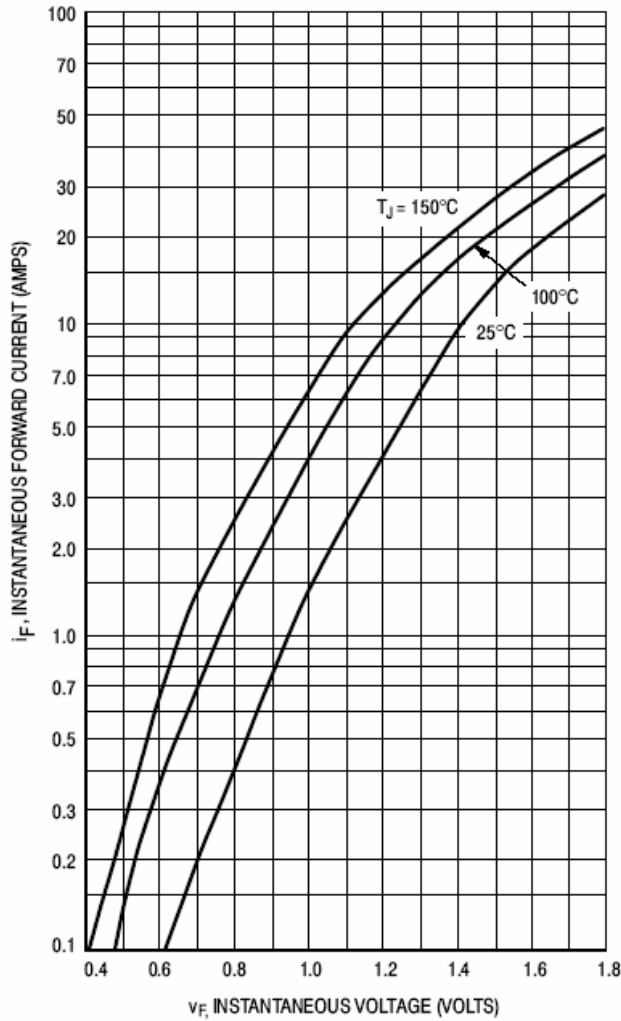


Figure 11. Typical Forward Voltage, Per Leg

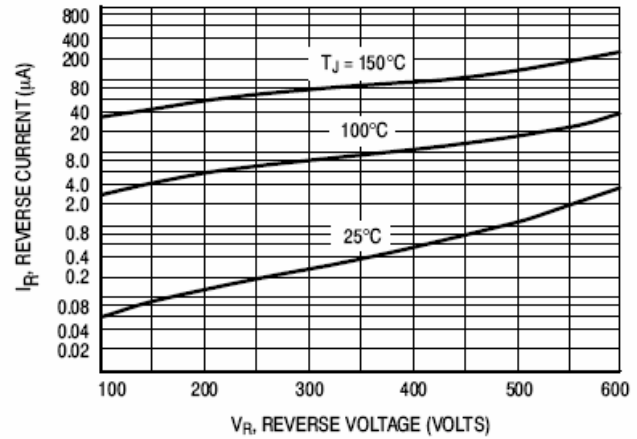


Figure 12. Typical Reverse Current, Per Leg*

* The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if V_R is sufficiently below rated V_R .

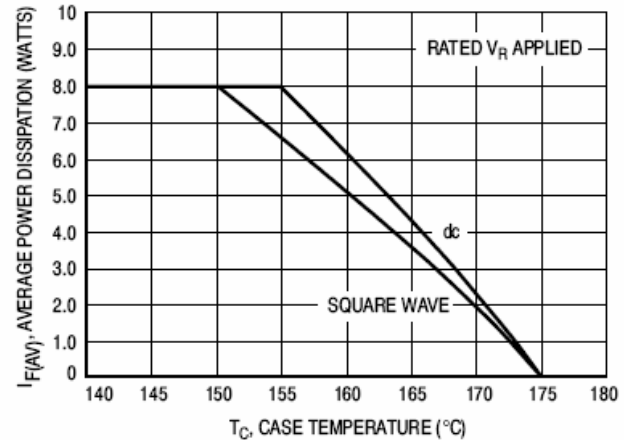


Figure 13. Current Derating, Case, Per Leg

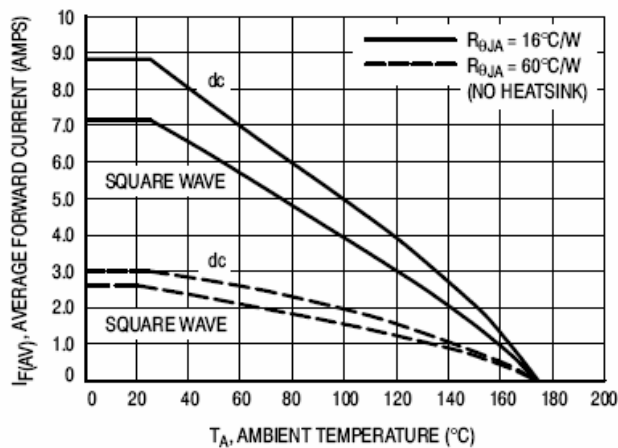


Figure 14. Current Derating, Ambient, Per Leg

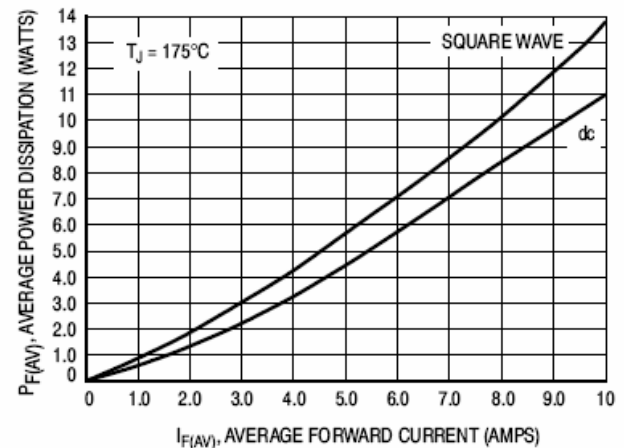
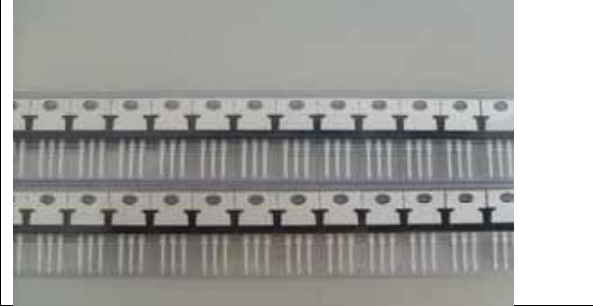




Figure 15. Power Dissipation, Per Leg

6. Packing Specification

	
<p>1) Tube : 50units</p>	<p>2) Inner Box: 20 tube(1000units)</p>
	
<p>3) Outer Box: 10 inner box (10,000units)</p>	

7 . DESCRIPTION of BOX LABEL

	<p>TYPE: Q'TY: P/O NO: LOT NO:</p>
<p>1) Inner Box Label</p>	<p>2) Inner Box Label</p>
	<p>TYPE: Q'TY: P/O NO:</p>
<p>3) Outer Box Label</p>	<p>4) Outer Box Label</p>