


MURS260-A

SURFACE MOUNT ULTRAFAST GLASS PASSIVATED RECTIFIER

VOLTAGE: 600V

CURRENT: 2.0A




FEATURE

Ideal for surface mount pick and place application
Low profile package
Built-in strain relief
High surge capability
High temperature soldering guaranteed
260°C/10sec/at terminals
Glass passivated chip
Ultrafast recovery time for high efficiency

MECHANICAL DATA

Terminal: Solder plated, solderable per MIL-STD-750,
Method 2026
Case: JEDEC DO-214AC molded plastic body over
passivated chip
Polarity: Color band denotes cathode
Marking: M260A

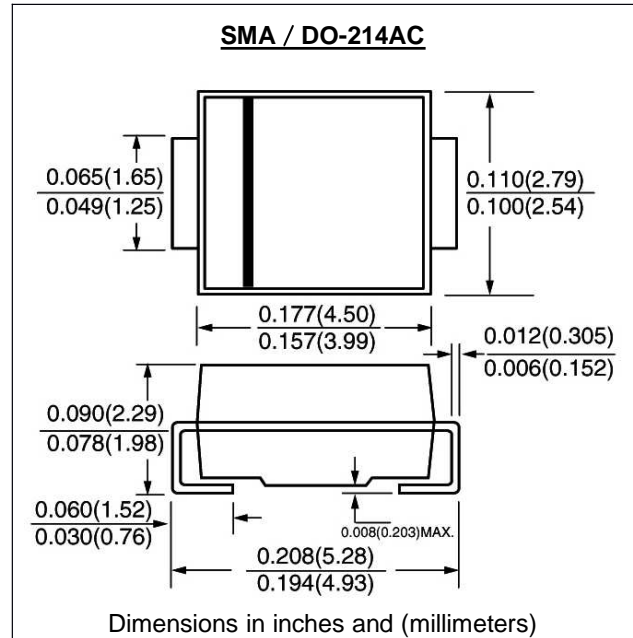

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated,
for capacitive load, derate current by 20%)

	SYMBOL	MURS260-A	units
Maximum Recurrent Peak Reverse Voltage	V _{rrm}	600	V
Maximum RMS Voltage	V _{rms}	420	V
Maximum DC blocking Voltage	V _{dc}	600	V
Maximum Average Forward Rectified	I _{f(av)}	2.0	A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I _{fsm}	35.0	A
Maximum Forward Voltage at rated Forward current	V _f	1.45	V
Maximum Reverse Recovery Time (Note 1)	T _{rr}	50	nS
Maximum DC Reverse Current Ta =25°C at rated DC blocking voltage Ta =150°C	I _r	5.0 150.0	μA
Typical Junction Capacitance (Note 2)	C _j	30.0	pF
Typical Thermal Resistance (Note 3)	R _{th(jl)}	13.0	°C/W
Storage and Operating Temperature	T _j , T _{stg}	-50 to +150	°C

Note:

1. Reverse Recovery Condition I_f =0.5A, I_r =1.0A, I_{rr} =0.25A
2. Measured at 1.0 MHZ and applied voltage of 4.0Vdc
3. Thermal Resistance from Junction to terminal mounted on 5x5mm copper pad area

RATINGS AND CHARACTERISTIC CURVES MURS260-A

