

Type No. AA210

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



FEATURES

Low forward voltage drop—low power consumption

Thirty years of proven reliability—one million hours mean time between failures (MTBF)

Very low noise level

Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage 30 Volts

Peak Forward Current 500 mA


Operating Temperature - 65 °C to 85 °C

Average Power Dissipation 80 mW

ELECTRICAL CHARACTERISTICS

| | Symbol | Conditions | Min | Max | Unit | T °C |
|-----------------------------|--------|------------|-----|------|------|-------|
| Peak Inverse Voltage | PIV | 1 mA | 30 | | V | 25 °C |
| Reverse Current | Ir | 10 V | | 30 | µA | 25 °C |
| Forward Voltage | Vf | 10 mA | | 0.95 | V | 25 °C |

MECHANICAL

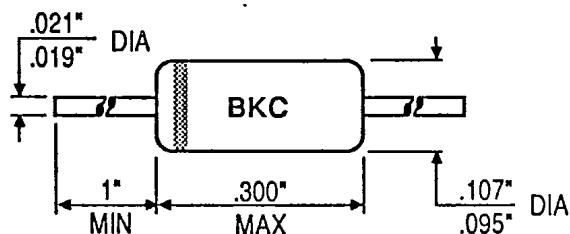

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.