


2x5mm Rectangular LED Lamps

FEATURES

- Flangeless package
- Diffused lens
- All plastic mold type
- Low drive current
- Other colors/materials available

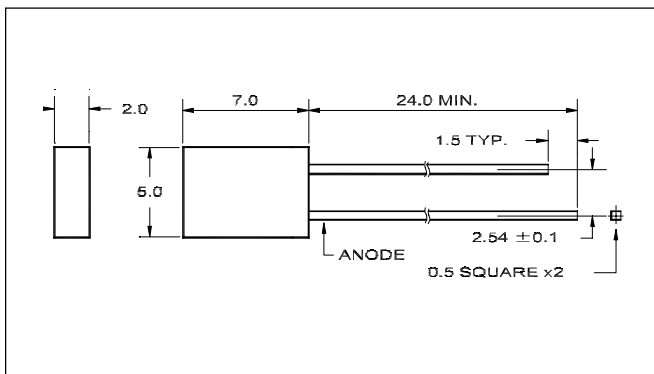

MAXIMUM RATINGS (Ta = 25°C)

PART NO.	FORWARD CURRENT (I _F) (mA)	REVERSE VOLTAGE (V _R) (V)	POWER DISSIPATION (P _D) (mW)	OPERATING TEMPERATURE (T _{opt}) (°C)	STORAGE TEMPERATURE (T _{stg}) (°C)
MT1152-RG	30	5.0	85	-25~+85	-25~+100
MT2152-G	30	5.0	85	-25~+85	-25~+100
MT3152-Y	30	5.0	85	-25~+85	-25~+100
MT4152-O	30	5.0	85	-25~+85	-25~+100
MT4152-HR	30	5.0	85	-25~+85	-25~+100

OPTO-ELECTRICAL CHARACTERISTICS (Ta = 25°C)

PART NO.	MATERIAL	LENS COLOR	VIEWING ANGLE typ.	LUMINOUS INTENSITY (mcd)			FORWARD VOLTAGE (V)			REVERSE CURRENT		PEAK WAVE LENGTH
				min.	typ.	@mA	typ.	max.	@mA	μA	V _r	nm
MT1152-RG	GaP	Red Diff	84°	1.7	2.9	20	2.1	3.0	20	100	5	700
MT2152-G	GaP	Green Diff	84°	4.2	7.1	20	2.1	3.0	20	100	5	567
MT3152-Y	GaAsP/GaP	Yellow Diff	84°	3.5	5.9	20	2.1	3.0	20	100	5	585
MT4152-O	GaAsP/GaP	Orange Diff	84°	5.0	8.3	20	2.1	3.0	20	100	5	635
MT4152-HR	GaAsP/GaP	Red Diff	84°	5.0	8.3	20	2.1	3.0	20	100	5	635