

## SINGLE-SUPPLY DUAL COMPARATOR

### ■ GENERAL DESCRIPTION

The NJM2407 is a single-supply dual comparator packaged in VSP8. Its input stage of darlington PNP detects GND level.

The common-emitter output circuit performs low output saturation voltage less than 400mV at output sink current 3mA.

### ■ PACKAGE OUTLINE




NJM2407R

### ■ FEATURES

- Operating Voltage (V<sup>+</sup>=+2V~+20V)
- Output Sink Current (6mA min.)
- Response Time (0.8 μs typ.)
- Bipolar Technology
- Package Outline VSP8


### ■ PIN CONFIGURATION

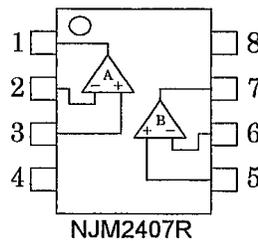

### PIN FUNCTION

- 1. A OUTPUT
- 2. A-INPUT
- 3. A+INPUT
- 4. GND
- 5. B+INPUT
- 6. B-INPUT
- 7. B OUTPUT
- 8. V<sup>+</sup>

### ■ EQUIVALENT CIRCUIT (1/2 Shown)

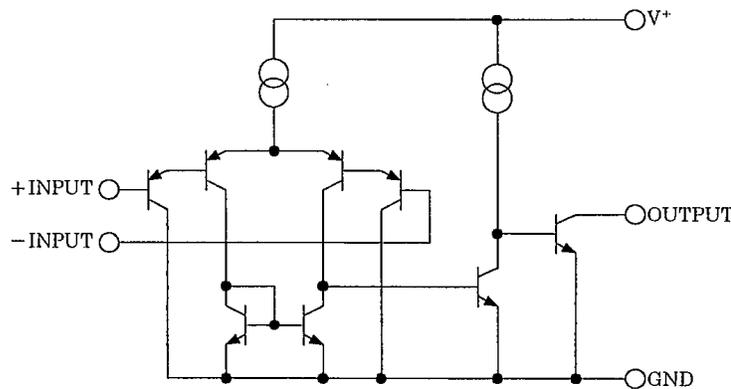

## ■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)







PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V^+(V^+/V^-)$	20(±10)	V
Differential Input Voltage	$V_{ID}$	±20	V
Input Voltage	$V_{IN}$	-0.3~+20(note)	V
Power Dissipation	$P_D$	320	mW
Operating Temperature Range	$T_{opr}$	-40~+85	°C
Storage Temperature Range	$T_{stg}$	-50~+125	°C

(note):When the supply voltage is less than +20V,the absolute maximum input is equal to the supply voltage.

## ■ ELECTRICAL CHARACTERISTICS (V<sup>+</sup>=5V,Ta=25°C)


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	$V_{IO}$	$R_s=0\Omega, V_o \cong 1.4V$	—	2	7	mV
Input Offset Current	$I_{IO}$		—	5	50	nA
Input Bias Current	$I_B$		—	25	250	nA
Large Signal Voltage Gain	$A_V$	$R_L=15k\Omega$	—	106	—	dB
Input Common Mode Voltage Range	$V_{ICM}$		0~3.5		—	V
Response Time	$t_R$	$R_L=5.1k\Omega$	—	0.8	—	μs
Output Sink Current	$I_{SINK}$	$V_{IN}^+=0V, V_{IN}^-=1V, V_o=1.5V$	6	16	—	mA
Output Saturation Voltage	$V_{SAT}$	$V_{IN}^+=0V, V_{IN}^-=1V, I_{SINK}=3mA$	—	200	400	mV
Output Leakage Current	$I_{LEAK}$	$V_{IN}^+=1V, V_{IN}^-=0V, V_o=5V$	—		1.0	μA
Operating Current	$I_{CC}$	$R_L=\infty$	—	0.4	1	mA

■ ELECTRICAL CHARACTERISTICS

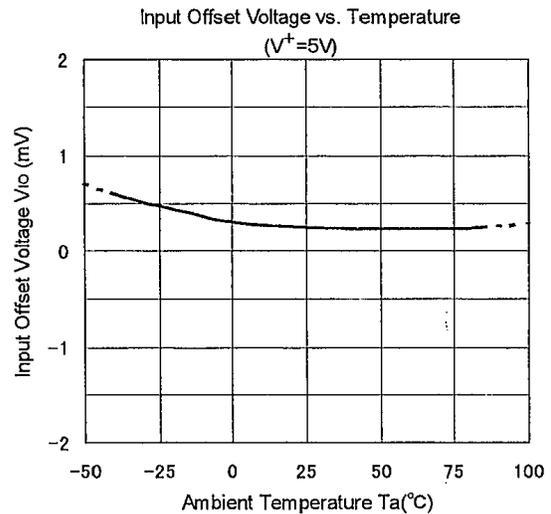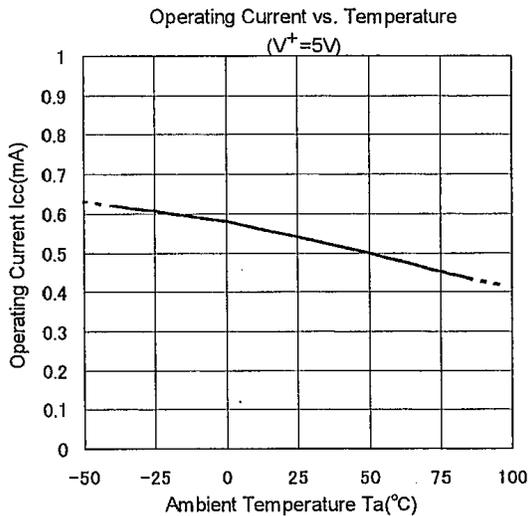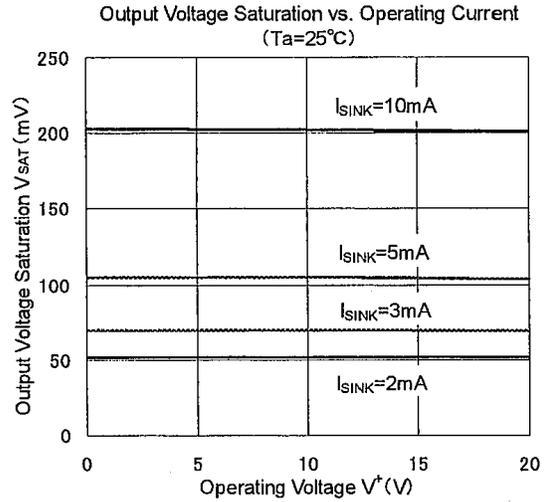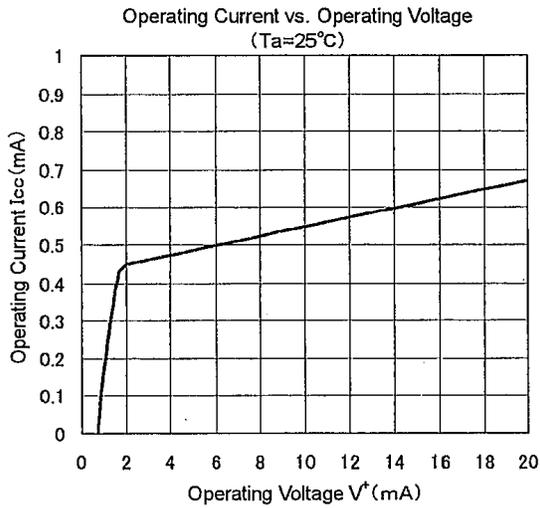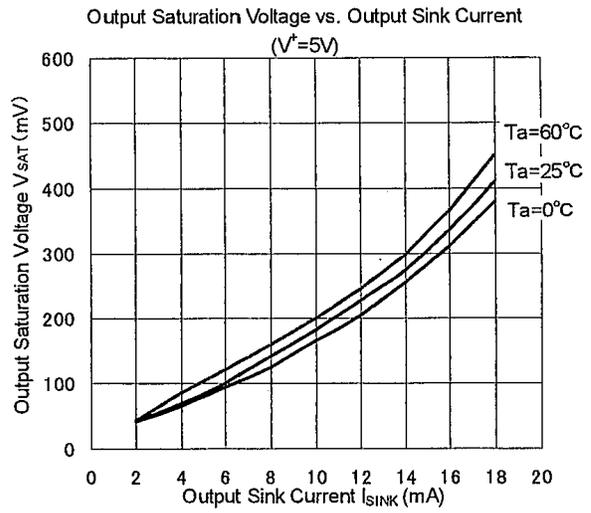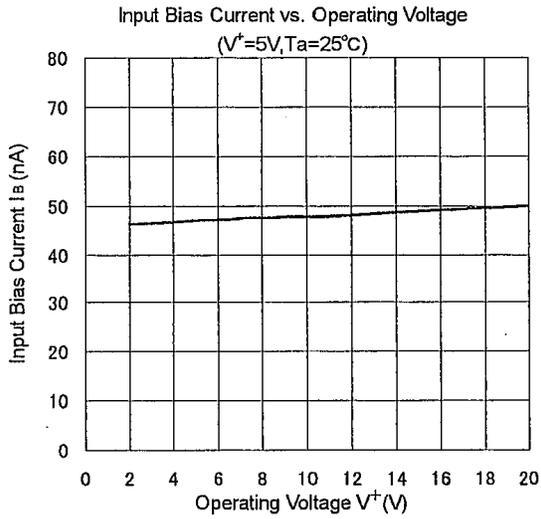

5

## ■ ELECTRICAL CHARACTERISTICS

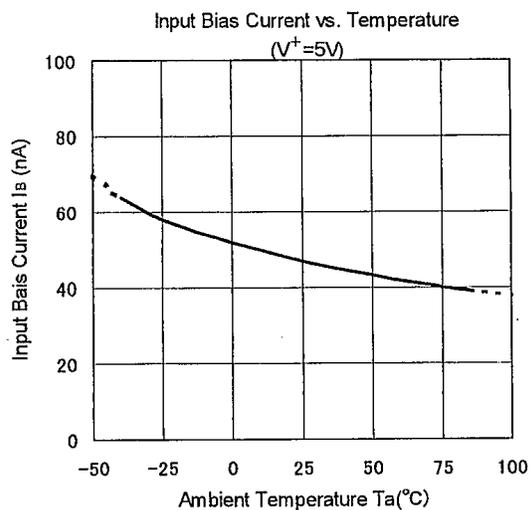

# NJM2407

---

## MEMO

**[CAUTION]**

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

---

*New Japan Radio Co., Ltd.*