

## QUARTZ CRYSTAL OSCILLATOR

### ■ GENERAL DESCRIPTION

The NJU6322 series is a C-MOS quartz crystal oscillator which consists of an oscillation amplifier, 3-stage divider and 3-state output buffer.

The oscillation frequency is as wide as up to 50MHz and the symmetry of 45-55% is realized over full oscillation frequency range.

The oscillation amplifier incorporates feed-back resistance and oscillation capacitors(Cg, Cd), therefore, it requires no external component except quartz crystal.

The 3-stage divider generates  $f_o$ ,  $f_o/2$ ,  $f_o/4$  and  $f_o/8$  and only one frequency selected by internal circuits is output.

The 3-state output buffer is TTL compatible and capable of 10 TTL driving.

### ■ PACKAGE OUTLINE

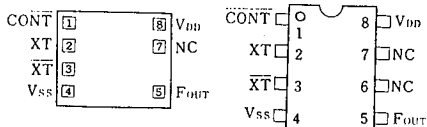


NJU6322XC



NJU6322XE

### ■ PIN CONFIGURATION/PAD LOCATION



### ■ FEATURES

- Operating Voltage                    -- 3.0~6.0V
- Maximum Oscillation Frequency -- 50MHz
- Low Operating Current
- High Fan-out                            -- TTL 10
- 3-state Output Buffer
- Selected Frequency Output (mask option)  
    Only one frequency out of  $f_o$ ,  $f_o/2$ ,  $f_o/4$   
    and  $f_o/8$  output
- Oscillation Capacitors Cg and Cd on-chip
- Oscillation and/or Output Stand-by Function
- Package Outline                        -- CHIP/EMP 8
- C-MOS Technology

### ■ COORDINATES

 Unit:  $\mu\text{m}$ 

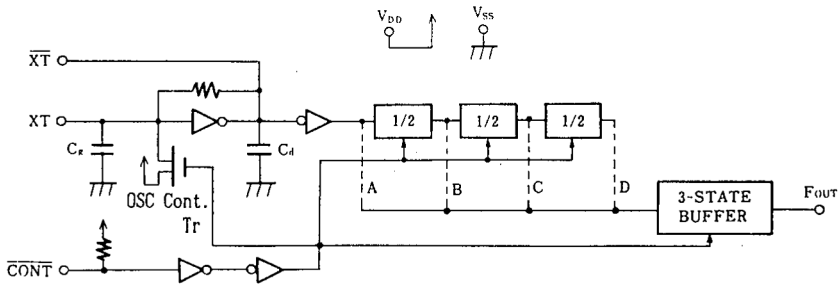
No.	PAD	X	Y
1	CONT	170	649
2	XT	170	483
3	XT	170	316
4	VSS	170	143
5	FOUT	1094	143
6	NC	-	-
7	NC	1094	462
8	VDD	1094	649

Chip Size                                : 1.24 X 0.8mm  
 Chip Thickness                        : 400 $\mu\text{m} \pm 30\mu\text{m}$

(Note) No. 6 and 7 terminals are only for package type information. There is No.7 PAD on the chip but no No.6.

### ■ LINE-UP TABLE

Type No.	Output Frequency	Cg	Cd	Osc. Stop Function
NJU6322L	$f_o$	23pF	23pF	NO
NJU6322M	$f_o/2$	23pF	23pF	NO
NJU6322N	$f_o/4$	23pF	23pF	NO
NJU6322U	$f_o/8$	23pF	23pF	NO
NJU6322K	$f_o$	12.5pF	12.5pF	YES
NJU6322W	$f_o$	12.5pF	12.5pF	NO
NJU6322P	$f_o$	NO	NO	NO
NJU6322T	$f_o$	NO	NO	NO

**■ BLOCK DIAGRAM**


(Note) Oscillation stop function is available only for NJU6322K.  
Other series have only output stand-by function.

www.DataSheet4U.com

**■ TERMINAL DESCRIPTION**

No.	SYMBOL	F U N C T I O N	
1	CONT	Oscillation Stop Control and Divider Reset	
		CONT	Output ( F <sub>OUT</sub> )
		H	Output either one frequency from f <sub>o</sub> , f <sub>o</sub> /2, f <sub>o</sub> /4 and f <sub>o</sub> /8
		L	Output High Impedance and Divider Reset In the NJU6322K also oscillation stop
2	XT	Quartz Crystal Connecting Terminals	
3	XT-bar		
5	F <sub>OUT</sub>	Output either one frequency from f <sub>o</sub> , f <sub>o</sub> /2, f <sub>o</sub> /4, and f <sub>o</sub> /8	
8	V <sub>DD</sub>	+5V	
4	V <sub>SS</sub>	GND	

**■ ABSOLUTE MAXIMUM RATINGS**

( Ta=25°C )

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sub>DD</sub>	-0.5 ~ +7.0	V
Input Voltage	V <sub>IN</sub>	-0.5 ~ V <sub>DD</sub> +0.5	V
Output Voltage	V <sub>O</sub>	-0.5 ~ V <sub>DD</sub> +0.5	V
Input Current	I <sub>IN</sub>	±10	mA
Output Current	I <sub>O</sub>	±25	mA
Power Dissipation (EMP)	P <sub>D</sub>	200	mW
Operating Temperature Range	T <sub>opr</sub>	-40 ~ + 85	°C
Storage Temperature Range	T <sub>stg</sub>	-65 ~ +150	°C

(Note) Decoupling capacitor should be connected between V<sub>DD</sub> and V<sub>SS</sub> due to the stabilized operation for the circuit.

## ■ ELECTRICAL CHARACTERISTICS

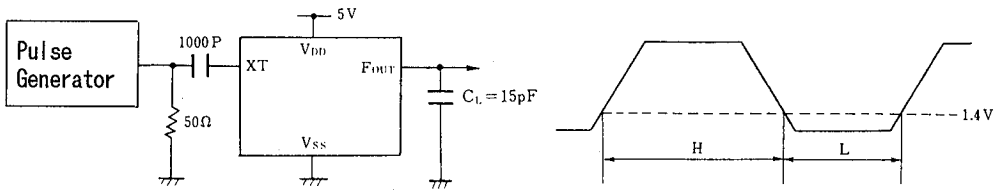
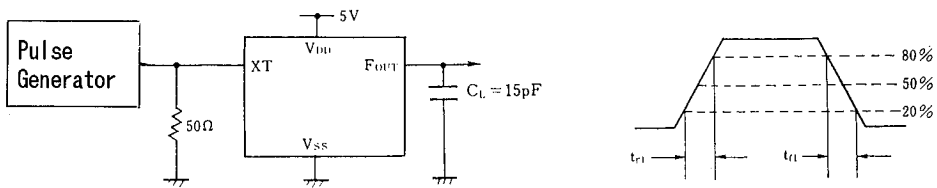
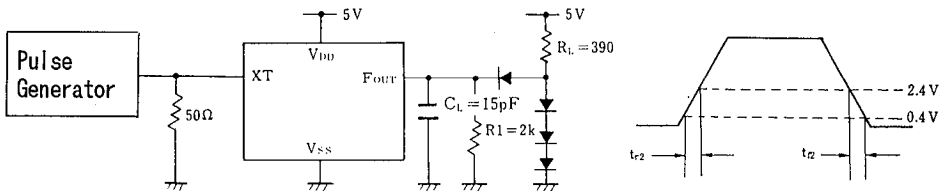
 (  $T_a=25^{\circ}\text{C}$ ,  $V_{DD}=5\text{V}$  )

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNIT
Operating Voltage	$V_{DD}$			3		6	V
Operating Current	$I_{DD}$	fosc=16MHz, No load				10	mA
Stand-by Current	$I_{st}$	CONT, XT= $V_{SS}$ , No load (Note)				1	$\mu\text{A}$
Input Voltage	$V_{IH}$			3.5		5.0	V
	$V_{IL}$			0		1.5	
Output Current	$I_{OH}$	$V_{DD}=5\text{V}$ , $V_{OH}=4.5\text{V}$		4			mA
	$I_{OL}$	$V_{DD}=5\text{V}$ , $V_{OL}=0.5\text{V}$		16			
Input Current	$I_{IN}$	CONT Terminal, CONT= $V_{SS}$				400	$\mu\text{A}$
Internal Capacitor	Cg, Cd	L, M, N, U Version			23		pF
		K Version			12.5		
		P, T Version			-		
Max. Oscillation Freq.	$f_{MAX}$	$V_{DD}=5\text{V}$ , $C_L=15\text{pF}$		50			MHz
Output Signal Symmetry	SYM	$V_{DD}=5\text{V}$ , $C_L=15\text{pF}$ at 1.4V		45	50	55	%
Output Signal Rise Time	$t_{r1}$	$V_{DD}=5\text{V}$	20% - 80%			8	ns
	$t_{r2}$	$C_L=15\text{pF}$	$R_L=390\Omega$ , 0.4V-2.4V			6	
Output Signal Fall Time	$t_{f1}$	$V_{DD}=5\text{V}$	80% - 20%			6	ns
	$t_{f2}$	$C_L=15\text{pF}$	$R_L=390\Omega$ , 2.4V-0.4V			4	

Note) Excluding input current on CONT terminal.

4

**MEASUREMENT CIRCUITS**

 (1) Output Signal Symmetry ( $C_L=15\text{pF}$ )

 (2) Output Signal Rise / Fall Time ( $C_L=15\text{pF}$ )

 (3) Output Signal Rise / Fall Time ( $C_L=15\text{pF}$ ,  $R_L=390\Omega$ )


# NJU6322 Series

---

## MEMO

www.DataSheet4U.com

**[CAUTION]**

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.