

P10SG-xxxxE/Z(H30)MLF



PM5-SERIES

Rev.11-2008

- ✓ 2 Watt
- ✓ Regulated
- ✓ **DIP24 Metal Case**
- ✓ **1 - 3 kV DC I/O Isolation**
- ✓ **Single and Dual Output**
- ✓ **Continuous Short Circuit Prot.**
- ✓ **Full SMD Technology**

The PM5 series P10SG-xxxxE/Z(H30)LF is a family of cost effective 2 W single and dual output DC/DC converters. These converters are encapsulated in an ultra miniature DIP24 metal case. High performance features: 1000VDC, optional up to 3000VDC input/output isolation, high efficiency operation, output voltage accuracy of $\pm 2\%$ maximum, input range of $\pm 10\%$ tolerance and low output ripple and noise.

All specifications typical at $T_a=25^\circ\text{C}$, nominal input voltage and full load unless otherwise specified

Input Specifications

Voltage Range	$\pm 10\%$
Input Filter	Pi Type
Input Reflected Ripple Current ¹	35 mA pk-pk

Output Specifications

Voltage Accuracy	$\pm 2\%$
Short Circuit Protection	Indefinite (automatic recovery)
Line Regulation	$\pm 0.5\%$
Load Regulation (0% - 100%)	$\pm 0.5\%$ (3.3Vout Models: $\pm 1.5\%$)
Ripple and Noise (20Mhz bandwidth)	75 mV pk-pk
Temperature Coefficient	$\pm 0.02\% / ^\circ\text{C}$

General Specifications

Efficiency	See Table
I/O Isolation Voltage (3 sec.)	1000 VDC (up to 3000 VDC optional)*
I/O Isolation Capacity	60 pF, typ.
I/O Isolation Resistance	1000 M Ohm
Switching Frequency (typical)	40 kHz (Single out); 300 kHz (Dual out)
Humidity	95% rel H
Reliability Calculated MTBF (MIL-HDBK-217F)	> 3.072 Mhrs

Physical Specifications

Case Material	Nickel Coated Copper
Potting Material	Epoxy (UL94V-0 rated)
Weight	~ 15g, typ.

Environment Specifications

Operating Temperature	-40 to +85 $^\circ\text{C}$ (ambient)
Maximum Case Temperature	100 $^\circ\text{C}$
Storage Temperature	-40 to +125 $^\circ\text{C}$
Cooling	Free Air Convection
RoHS Conform	Soldering 260 $^\circ\text{C}$, max. (1.5mm from case 10s.)

Selection Guide

Single/Dual Output


Order #	Input Voltage (VDC)	Input Current No Load (mA)	Input Current Full Load (mA)	Output Voltage (VDC)	Output Current Full Load (mA)	Efficiency (%)	Capacitor Load (µF) ²
<u>SINGLE OUTPUT</u>							
P10SG-053R3EMLF	5	75	622	3.3	500	53	330
P10SG-0505EMLF	5	75	615	5	400	65	330
P10SG-0509EMLF	5	75	597	9	222	67	330
P10SG-0512EMLF	5	75	571	12	166	70	330
P10SG-0515EMLF	5	75	588	15	133	68	330
P10SG-0524EMLF	5	75	615	24	83.3	65	330
P10SG-123R3EMLF	12	70	245	3.3	500	56	330
P10SG-1205EMLF	12	70	260	5	400	64	330
P10SG-1209EMLF	12	70	245	9	222	68	330
P10SG-1212EMLF	12	70	238	12	166	70	330
P10SG-1215EMLF	12	70	252	15	133	66	330
P10SG-1224EMLF	12	70	256	24	83.3	65	330
P10SG-243R3EMLF	24	25	120	3.3	500	57	330
P10SG-2405EMLF	24	25	132	5	400	63	330
P10SG-2409EMLF	24	25	132	9	222	63	330
P10SG-2412EMLF	24	25	122	12	166	68	330
P10SG-2415EMLF	24	25	122	15	133	68	330
P10SG-2424EMLF	24	25	122	24	83.3	68	330
<u>DUAL OUTPUT</u>							
P10SG-053R3ZMLF	5	30	638	± 3.3	± 300	62	± 1000
P10SG-0505ZMLF	5	30	588	± 5	± 200	68	± 1000
P10SG-0509ZMLF	5	40	571	± 9	± 111	70	± 470
P10SG-0512ZMLF	5	40	571	± 12	± 83	70	± 470
P10SG-0515ZMLF	5	40	571	± 15	± 67	70	± 470
P10SG-0524ZMLF	5	50	579	24	42	69	220
P10SG-123R3ZMLF	12	20	250	± 3.3	± 300	66	± 1000
P10SG-1205ZMLF	12	20	228	± 5	± 200	73	± 1000
P10SG-1209ZMLF	12	20	222	± 9	± 111	75	± 470
P10SG-1212ZMLF	12	20	213	± 12	± 83	78	± 470
P10SG-1215ZMLF	12	35	216	± 15	± 67	77	± 470
P10SG-1224ZMLF	12	35	219	± 24	± 42	76	± 220
P10SG-243R3ZMLF	24	15	121	± 3.3	± 300	68	± 1000
P10SG-2405ZMLF	24	15	114	± 5	± 200	73	± 1000
P10SG-2409ZMLF	24	15	111	± 9	± 111	75	± 470
P10SG-2412ZMLF	24	15	104	± 12	± 83	80	± 470
P10SG-2415ZMLF	24	20	108	± 15	± 67	77	± 470
P10SG-2424ZMLF	24	20	111	± 24	± 42	75	± 220

If you need other specifications, please enquire.

*** For optional 3kV DC I/O Isolation, please add "H30" before MLF!**



→ Example: P10SG-1205ZH30MLF for 3kV

Package / Pinning / Derating

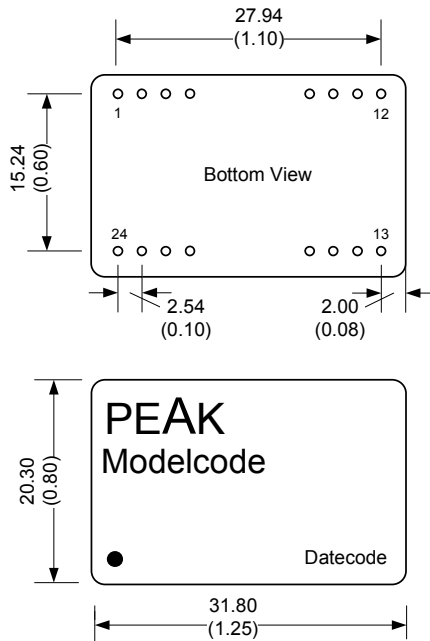

All dimensions are typical in millimeters (inches).
 - Pin diameter: 0.5 +/-0.05 (0.02 +/-0.002)
 - Pin pitch tolerance: +/-0.35 (+/-0.014)
 - Case tolerance +/-0.5 (+/-0.02)
 Standard Drawing
 For exact pinning please see connection table!
 Specification may change without notice.

DIP24 – METAL CASE

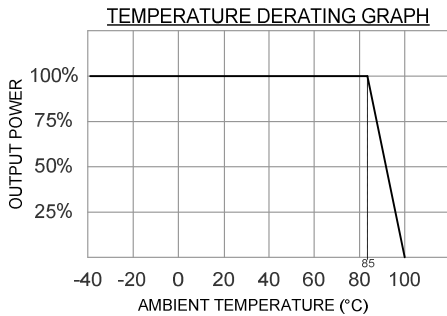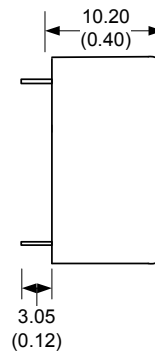

PIN CONNECTIONS				
#	SINGLE	DUAL	SINGLE 3KV	DUAL 3KV
1	+Vin	+Vin	+Vin	+Vin
2	N.C.	- Vout	+Vin	+Vin
3	N.C.	Common	Omitted	Omitted
10	- Vout	Common	Omitted	Common
11	+Vout	+Vout	Omitted	Common
12	- Vin	- Vin	- Vout	Omitted
13	- Vin	- Vin	+Vout	- Vout
14	+Vout	+Vout	Omitted	Omitted
15	- Vout	Common	Omitted	+ Vout
22	N.C.	Common	Omitted	Omitted
23	N.C.	- Vout	- Vin	- Vin
24	+Vin	+Vin	- Vin	- Vin

App Notes:

- ¹ = Measured Input reflected ripple current with a simulated source inductance of 12uH.
- ² = Tested by minimal Vin and constant resistive load.