

P10TG-xxxxE/Z4:1(H35)LF



PEAK
electronics

Mainzer Straße 151–153
D-55299 Nackenheim
Tel. +49 6135 7026-0
Fax: +49 6135 931070
www.peak-electronics.de
peak@peak-electronics.de

PMP-SERIES

Rev.02-2009

- ✓ 2 Watt
- ✓ 4:1 Wide Input
- ✓ Regulated
- ✓ **DIP24 Plastic Case**
- ✓ **1.5 or 3.5 KV DC I/O Isolation**
- ✓ **SINGLE and DUAL Output**
- ✓ **Continuous Short Circuit Prot.**

The PMP series P10TG-xxxxE/4:1(H30)LF is a family of cost effective 2W single & dual output DC-DC converters with a wide input Voltage of 4:1. These converters are encapsulated in an ultra miniature DIP24 plastic or metal case. High performance features: 1500VDC up to 3500VDC input/output isolation, high efficiency operation, output voltage accuracy of $\pm 1\%$ maximum, wide input range 4:1 and low output ripple and noise.

All specifications typical at Ta=25°C, nominal input voltage and full load unless otherwise specified

Input Specifications

Voltage Range	4:1 Wide Input
Input Filter	Pi Type
Input Reflected Ripple Current ¹	35 mA pk-pk

Output Specifications

Voltage Accuracy	$\pm 1\%$
Short Circuit Protection	Indefinite (automatic recovery)
Line Regulation	$\pm 0.5\%$
Load Regulation	$\pm 0.5\%$ / $\pm 1.5\%$ (only 3.3 / ± 3.3 Vout Models)
Ripple and Noise (20Mhz bandwidth)	60 mV pk-pk
Temperature Coefficient	$\pm 0.02\%$ / °C

General Specifications

Efficiency	See Table
I/O Isolation Voltage (3 sec.)	1500 VDC (3500 VDC optional)*
I/O Isolation Capacity	470 pF, typ.
I/O Isolation Resistance	1000 MOhm
Switching Frequency (typical)	266 kHz, typ.
Humidity	95% rel H
Reliability Calculated MTBF (MIL-HDBK-217F)	> 1.121 Mhrs

Physical Specifications

Case Material	Non Conductive Black Plastic
Potting Material	Epoxy (UL94V-0 rated)
Weight	~ 13.5g, typ.

Environment Specifications

Operating Temperature	-40 to +85 °C (ambient)
Maximum Case Temperature	100 °C
Storage Temperature	-40 to +125 °C
Cooling	Free Air Convection
RoHS Conform	Soldering 260 °C, max. (1.5mm from case 10s.)

PMP-Series – P10TG-xxxxE/Z4:1(H35)LF – Single and Dual Output – DIP24 - Plastic Case

Specification can change without a notice – We accept no liability for any inaccuracy or printing errors.

Page 1/3

Selection Guide

Single/Dual Output


Order #	Input Voltage (VDC)	Input Current No Load (mA)	Input Current Full Load (mA)	Output Voltage (VDC)	Output Current Min. Load (mA)	Output Current Full Load (mA)	Efficiency (%)	Capacitor Load (uF) ²
SINGLE OUTPUT								
P10TG-243R3E4:1LF	9-36	15	110	3.3	0	600	75	470
P10TG-2405E4:1LF	9-36	15	109.6	5	0	400	76	330
P10TG-2409E4:1LF	9-36	15	106.8	9	0	222	78	68
P10TG-2412E4:1LF	9-36	15	106.8	12	0	166	78	47
P10TG-2415E4:1LF	9-36	15	106.8	15	0	133	78	22
P10TG-2424E4:1LF	9-36	15	106.8	24	0	83	78	10
P10TG-483R3E4:1LF	18-72	12	55	3.3	0	600	75	470
P10TG-4805E4:1LF	18-72	12	54.82	5	0	400	76	330
P10TG-4809E4:1LF	18-72	12	53.4	9	0	222	78	68
P10TG-4812E4:1LF	18-72	12	53.4	12	0	166	78	47
P10TG-4815E4:1LF	18-72	12	53.4	15	0	133	78	22
P10TG-4824E4:1LF	18-72	12	53.4	24	0	83	78	10
DUAL OUTPUT								
P10TG-243R3Z4:1LF	9-36	15	110	± 3.3	0	± 303	75	± 220
P10TG-2405Z4:1LF	9-36	15	109.6	± 5	0	± 200	76	± 100
P10TG-2409Z4:1LF	9-36	15	106.8	± 9	0	± 111	78	± 33
P10TG-2412Z4:1LF	9-36	15	106.8	± 12	0	± 83	78	± 22
P10TG-2415Z4:1LF	9-36	15	106.8	± 15	0	± 66	78	± 10
P10TG-2424Z4:1LF	9-36	15	106.8	± 24	0	± 41	78	± 10
P10TG-483R3Z4:1LF	18-72	12	55.5	± 3.3	0	± 303	75	± 220
P10TG-4805Z4:1LF	18-72	12	54.82	± 5	0	± 200	76	± 100
P10TG-4809Z4:1LF	18-72	12	53.4	± 9	0	± 111	78	± 33
P10TG-4812Z4:1LF	18-72	12	53.4	± 12	0	± 83	78	± 22
P10TG-4815Z4:1LF	18-72	12	53.4	± 15	0	± 66	78	± 10
P10TG-4824Z4:1LF	18-72	12	53.4	± 24	0	± 41	78	± 10

If you need other specifications, please enquire.

*** For optional 3.5kV DC I/O Isolation, please add “H35” before LF!**

→ Example: P10TG-2405Z4:1H35LF for 3.5kV


Package / Pinning / Derating

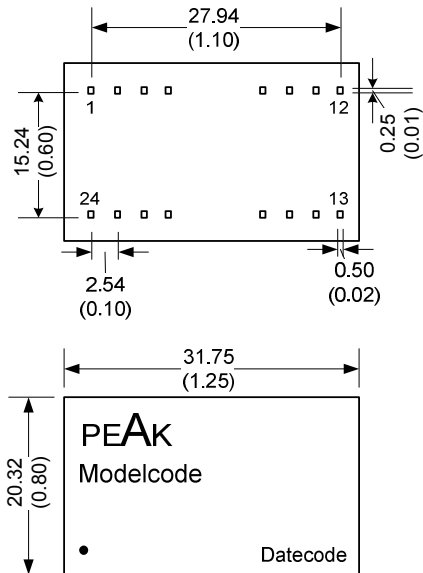

All dimensions are typical in millimeters (inches).
 - Pin diameter: 0.5 +/-0.05 (0.02 +/-0.002)
 - Pin pitch tolerance: +/-0.35 (+/-0.014)
 - Case tolerance +/-0.5 (+/-0.02)
 Specification may change without notice.

DIP24 – PLASTIC CASE

TEMPERATURE DERATING GRAPH

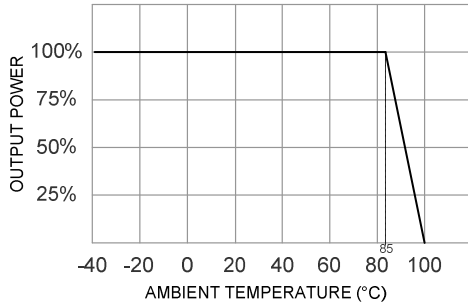

PIN CONNECTIONS				
#	SINGLE	DUAL	SINGLE 3.5KV	DUAL 3.5KV
1	+Vin	+Vin	Omitted	Omitted
2	N.C.	- Vout	- Vin	- Vin
3	N.C.	Common	- Vin	- Vin
9	Omitted	Omitted	N.C.	Common
10	- Vout	Common	Omitted	Omitted
11	+Vout	+Vout	N.C.	- Vout
12	- Vin	- Vin	Omitted	Omitted
13	- Vin	- Vin	Omitted	Omitted
14	+Vout	+Vout	+Vout	+Vout
15	- Vout	Common	Omitted	Omitted
16	Omitted	Omitted	- Vout	Common
22	N.C.	Common	+Vin	+Vin
23	N.C.	- Vout	+Vin	+Vin
24	+Vin	+Vin	Omitted	Omitted
others	Omitted			

App Notes:

- ¹ = Measured Input reflected ripple current with a simulated source inductance of 12uH.
- ² = Tested by nominal Vin and constant resistive load.