


FEATURES

- High speed operation up to 12.5Gb/s
- On-chip 50Ω Termination for High Speed Data Input
- Low Rise/Fall Time: 25ps (Typ., 20-80%)
- Adjustable Output Voltage Swing: 1.5Vpp to 2.5Vpp (50Ω load)
- Adjustable Output Offset Level
- Low Power Dissipation: 0.91W
- Single Power Supply Voltage: -5.20V
- Adjustable Duty Ratio
- Hermetically Sealed Ceramic Package (6mm x 6mm, 32-Pin)

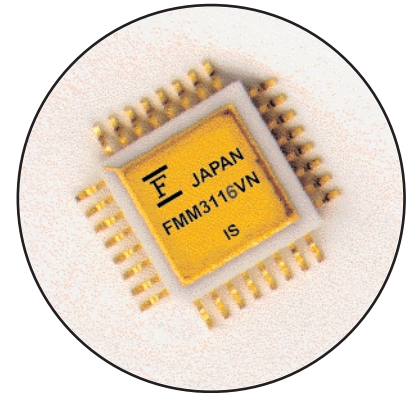

DESCRIPTION

The FMM3116VN is a 12.5Gb/s(OC-192) driver with an output voltage of 2.5Vpp for the Modulator Integrated (MI)-Laser. This product is uniquely suited for use as a driver for MI-Lasers such as FLD5F20NP. The output is adjustable for peak current, duty ratio, and offset voltage/current. This product features an internal 50Ω termination at both high-speed differential inputs for ease of design and use.

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Ratings	Unit
Supply Voltage	V_{SS}	-6.50 to 0.0	V
Input Voltage	V_{IN}	-2.0 to 0.5	V
Power Supply Current	I_{SS}	500	mA
Peak Current Control Voltage	V_{IP}	$V_{SS}-0.5$ to $V_{SS}+2.2$	V
Output Offset Control Voltage	$V_{IB1,2}$	-8.0 to 0.5	V
Output Offset Control Current	$I_{B1,2}$	50	mA
Duty Control Voltage	V_{DUT}	$V_{SS}-0.5$ to $V_{SS}+2.2$	V
Output Voltage	V_{OUT}	-3.1 to 0.5	V
Storage Temperature	T_{stg}	-55 to 125	°C


ELECTRICAL CHARACTERISTICS (Unless otherwise specified, $T_c=25^\circ\text{C}$, $V_{SS}=-5.20\text{V}$, $R_L=50\Omega$)

Parameter	Symbol	Test Conditions	Limit			Unit
			Min.	Typ.	Max.	
Maximum Data Rate	fb	NRZ	12.5	-	-	Gb/s
Power Supply Current	I_{SS}	$V_{OUT}=2.0\text{Vpp}$, $R_L=50\Omega$, $I_{B1}=I_{B2}=0\text{mA}$	-	190	250	mA
Output Voltage Swing (max.)	V_{OUTMAX}		2.5	-	-	Vpp
Output Voltage Swing (min.)	V_{OUTMIN}		-	-	1.5	Vpp
Rise Time	t_r	20 to 80%, $V_{OUT}=2.0\text{Vpp}$	-	25	35	ps
Fall Time	t_f		-	25	35	ps
Output Low Voltage	V_{OL}		-3.0	-	-	V
Crossing Adjustment Range	Crossing	$D_{in}/D_{inB}=0.25\text{Vpp}$, $V_{OUT}=2.0\text{Vpp}$	50	-	70	%
Jitter RMS (OUT)	Jitter	$V_{OUT}=2.0\text{Vpp}$, Cross=65%	-	-	3.0	ps

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Test Conditions	Limit			Unit
			Min.	Typ.	Max.	
Supply Voltage	V_{SS}		-5.46	-5.20	-4.94	V
Input Data Level High	V_{IH}	Differential Input Data Swing=0.25~1.20Vpp Single-ended Input Data Swing=0.50~1.20Vpp	-0.50	-	0	V
Input Data Level Low	V_{IL}		-1.20	-	-0.25	V
Input Data Swing	V_{ISD}	Differential Input	0.25	-	1.20	Vpp
	V_{ISS}	Single-ended Input	0.5	-	1.20	
Output Swing Control Voltage	V_{IP}		V_{SS}	-	$V_{SS} + 2.0$	V
Output Offset Control Voltage	$V_{IB1,2}$		V_{SS}	-	0	V
Output Offset Control Current	$I_{B1,2}$		0	-	40	mA
Duty Control Voltage	V_{DUT}		V_{SS}	-	$V_{SS} + 2.0$	V
Case Temperature	T_C		0	-	75	°C


Block Diagram

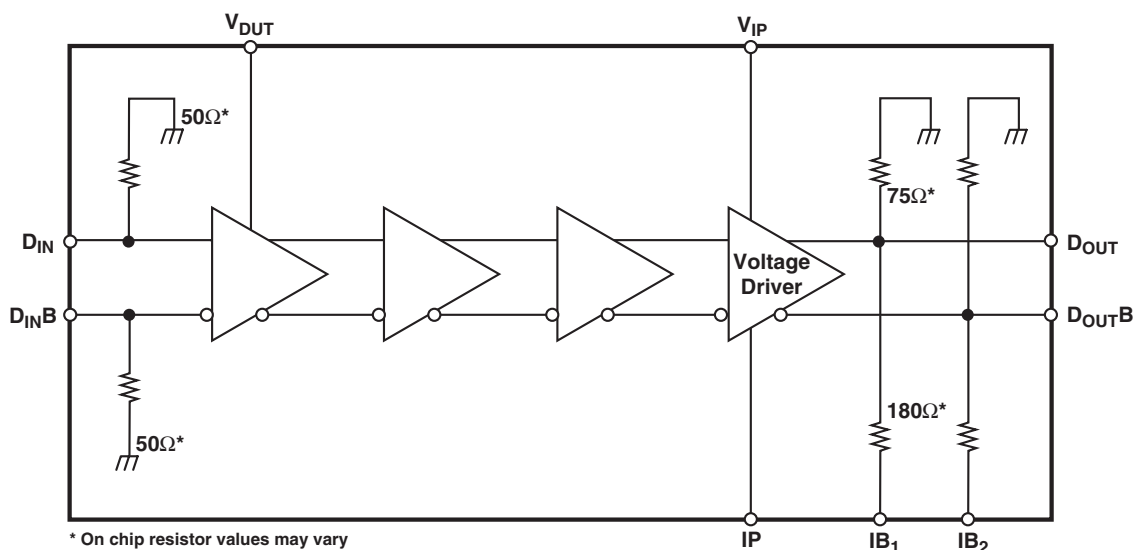

Truth Table for D_{OUT} and D_{OUTB}


D_{IN}	D_{INB}	D_{OUT}	D_{OUTB}	Optical Output from MI-LD at D_{OUT}	Optical Output from MI-LD at D_{OUTB}
0	1	L	H	L	H
1	0	H	L	H	L

Electrical Eye Pattern of D_{OUT}

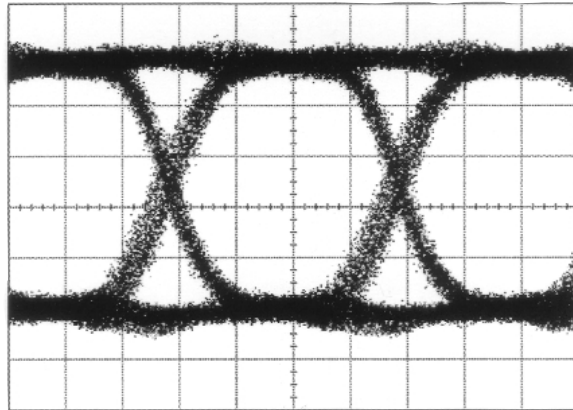


Tc=25°C, V_{SS}=-5.2V, V_{IB1}=V_{IB2}=0V, 12.5 Gb/s, PRBS=2²³-1, RL=50Ω,
V_{OUT}=2.5Vpp, [H: 20ps/div., V:0.5V/div.]

Optical Eye Pattern with filter after 1600ps/nm fiber transmission

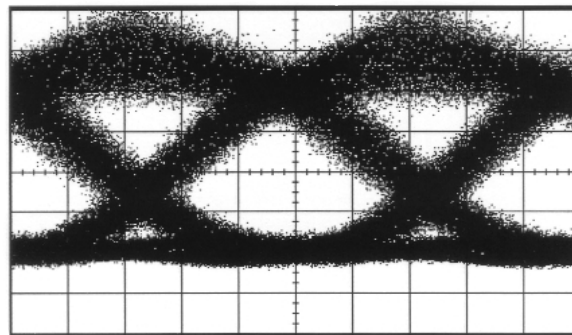


Tc=25°C, V_{SS}=-5.2V, 9.95328Gbps, PRBS=2²³-1, MI-LD: FLD5F20NP,
T_{LD}=25°C, I_{OP}=70mA, V_o=-0.7V, V_{OUT}=2.0Vpp


V_{OUT} vs. V_{IP} Characteristics

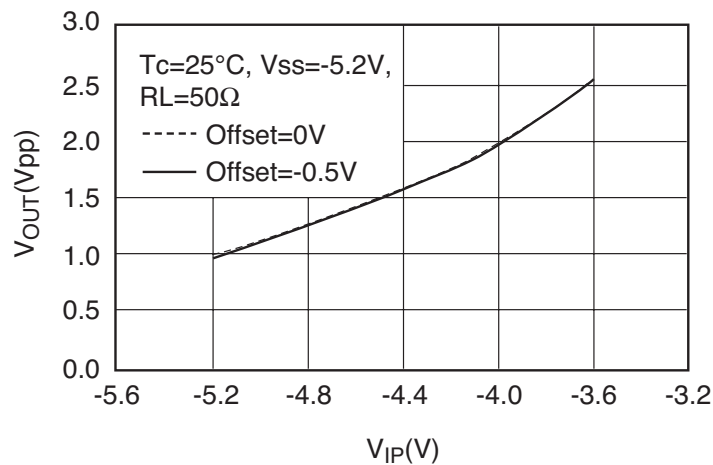

Test Circuit

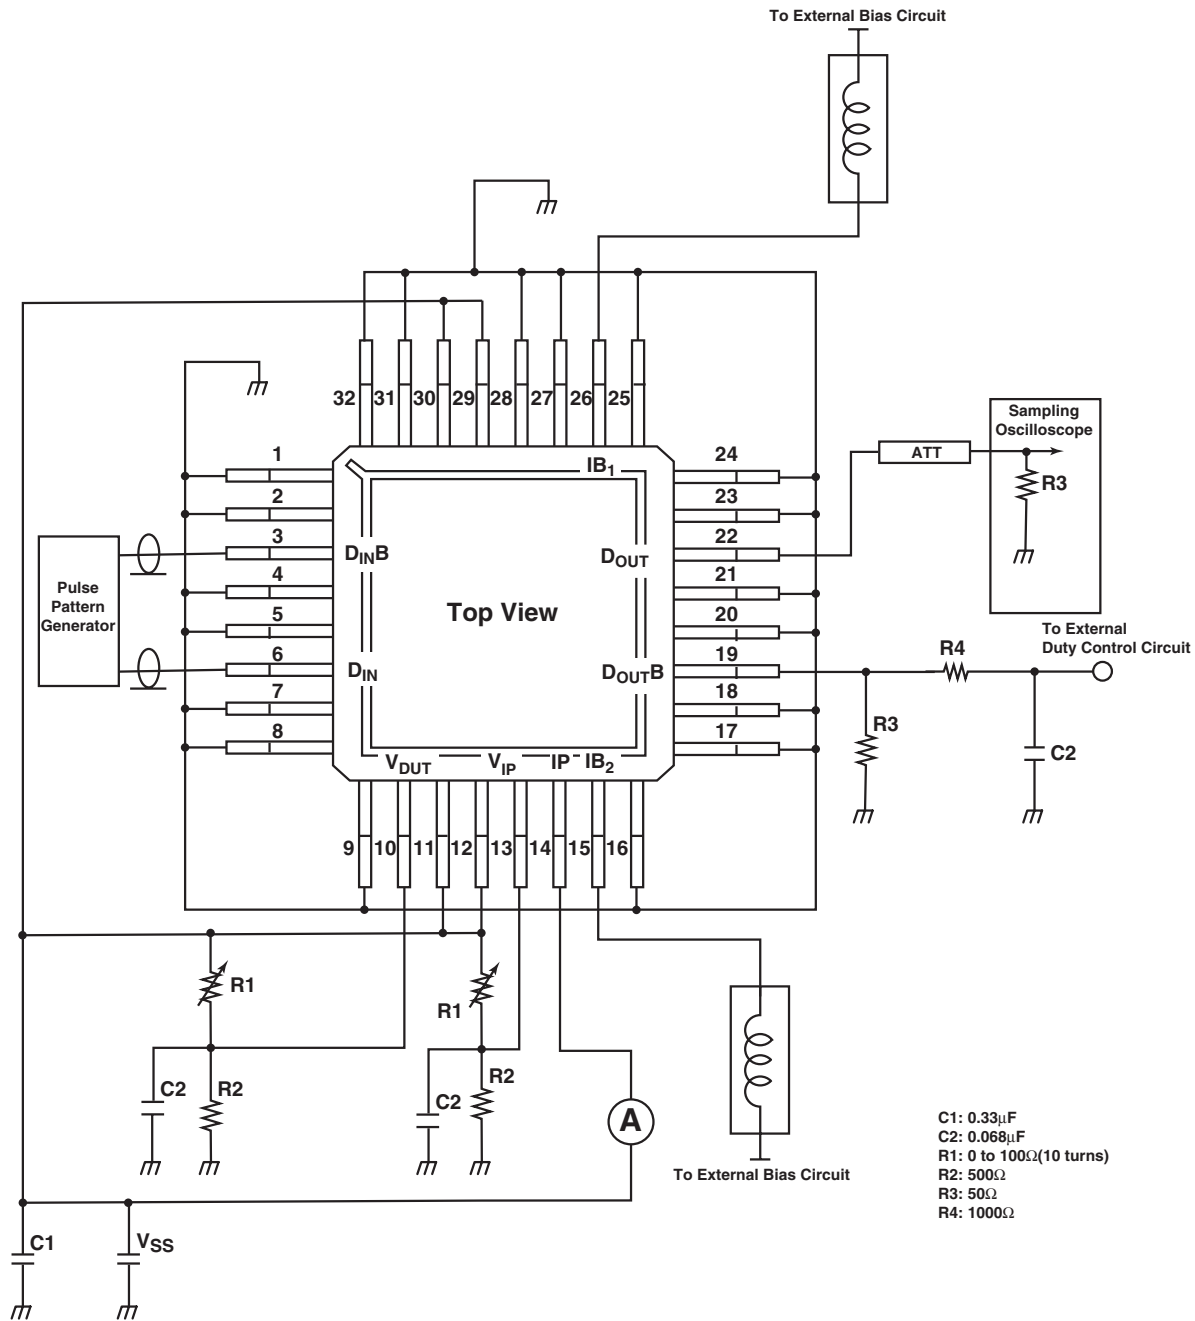


Pin Assignment

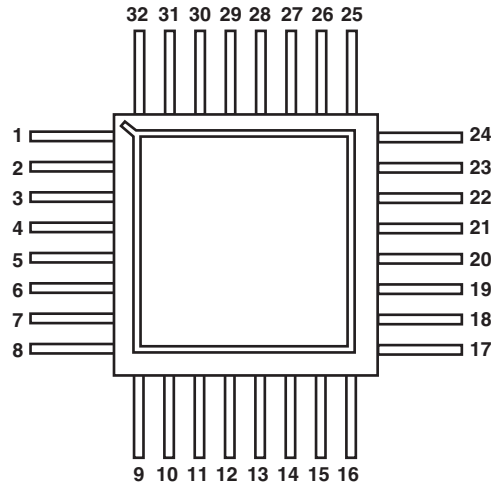

Pin Description

Pin Name	Pin No.	I/O	Description	Pin Name	Pin No.	I/O	Description
GND	1	-	Ground	GND	17	-	Ground
GND	2	-	Ground	GND	18	-	Ground
D _{INB}	3	I	Complementary Data Input	D _{OUTB}	19	O	Complementary Data Output
GND	4	-	Ground	GND	20	-	Ground
GND	5	-	Ground	GND	21	-	Ground
D _{IN}	6	I	Data Input	D _{OUT}	22	O	Data Output
GND	7	-	Ground	GND	23	-	Ground
GND	8	-	Ground	GND	24	-	Ground
GND	9	-	Ground	GND	25	-	Ground
V _{DUT}	10	I	Duty Control Voltage	IB ₁	26	I	D _{OUT} Offset Control
V _{SS}	11	-	Supply Voltage	GND	27	-	Ground
V _{SS}	12	I	Supply Voltage	GND	28	-	Ground
V _{IP}	13	I	Output Swing Control Voltage	V _{SS}	29	-	Supply Voltage
IP	14	-	Peak Current Monitor (V _{SS})	V _{SS}	30	-	Supply Voltage
IB ₂	15	I	D _{OUTB} Offset Control	GND	31	-	Ground
GND	16	-	Ground	GND	32	-	Ground

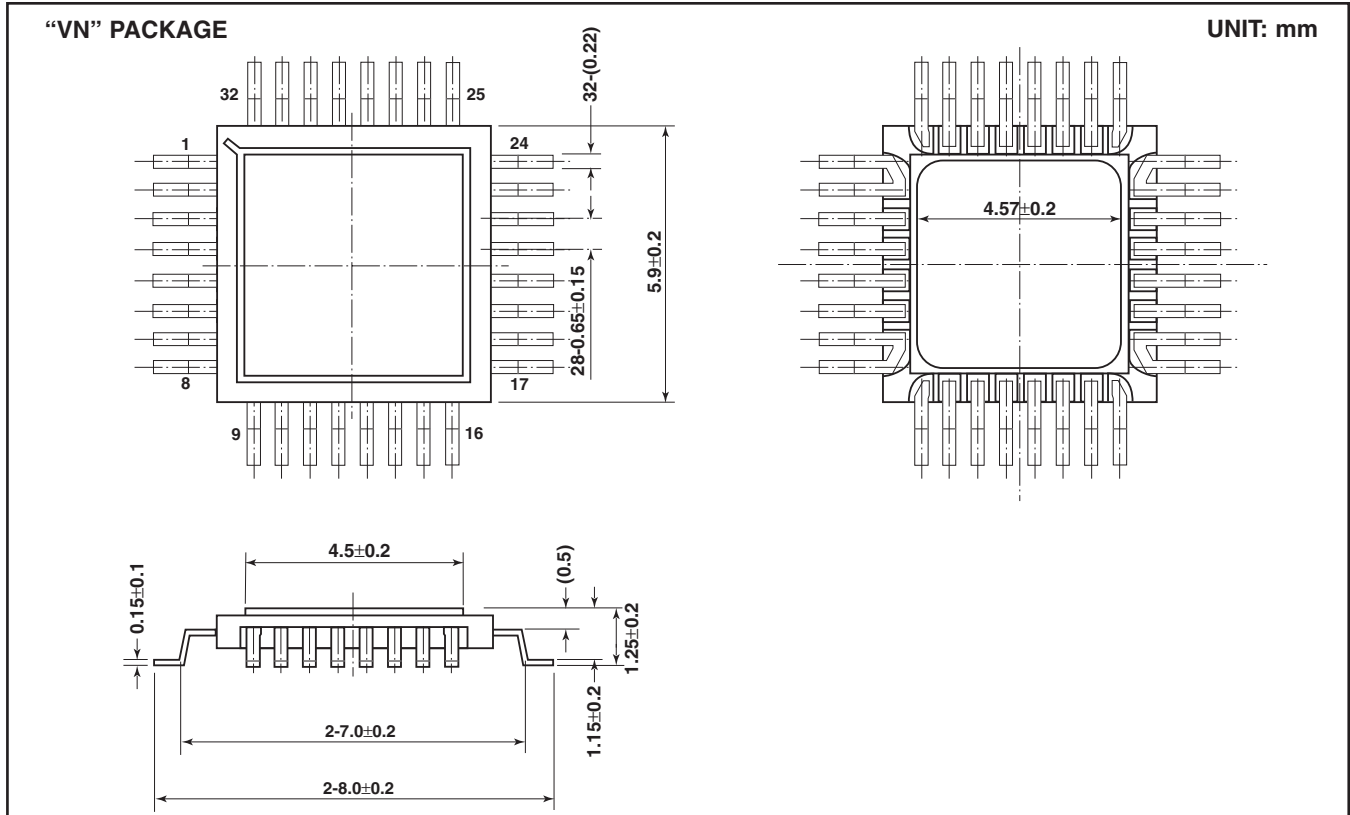

For further information please contact:

FUJITSU COMPOUND SEMICONDUCTOR, INC.

2355 Zanker Rd.
San Jose, CA 95131-1138, U.S.A.
Phone: (408) 232-9500
FAX: (408) 428-9111
www.fcsi.fujitsu.com

FUJITSU QUANTUM DEVICES EUROPE LTD.

Network House
Norreys Drive
Maidenhead, Berkshire SL6 4FJ
United Kingdom
TEL: +44 (0) 1628 504800
FAX: +44 (0) 1628 504888

FUJITSU QUANTUM DEVICES SINGAPORE PTE LTD.

Hong Kong Branch

Rm. 1101, Ocean Centre, 5 Canton Rd. Tsim Sha Tsui,
Kowloon, Hong Kong
TEL: +852-23770226
FAX: +852-23763269

Fujitsu Limited reserves the right to change products and specifications without notice.
The information does not convey any license under rights of Fujitsu Limited or others.

© 2003 FUJITSU COMPOUND SEMICONDUCTOR, INC.
Printed in U.S.A. FCSI0502M200

CAUTION

Fujitsu Compound Semiconductor Products contain **gallium arsenide (GaAs)** which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- Do not put this product into the mouth.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.

FUJITSU QUANTUM DEVICES LIMITED

Business Development Division
11th Floor, Hachioji Daiichi-Seimei Bldg.
3-20-6 Myojin-cho
Hachioji-city, Tokyo 192-0046, Japan
TEL: +81-426-43-5885
FAX: +81-426-43-5582