

Silicon NPN Power Transistors

2SD2374 2SD2374A

DESCRIPTION

www.datasheet4u.com

- With TO-220F package
- Complement to type 2SB1548/1548A
- Low collector saturation voltage
- High forward current transfer ratio  $h_{FE}$  which has satisfactory linearity

APPLICATIONS

- For power amplifications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

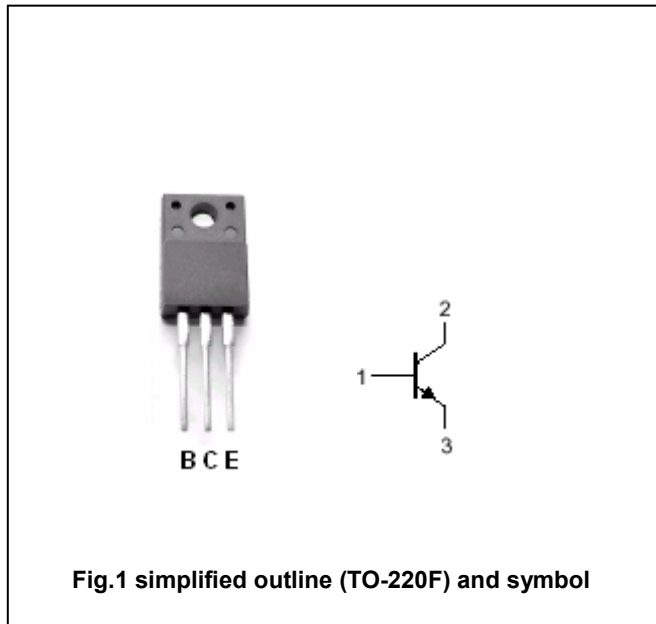


Fig.1 simplified outline (TO-220F) and symbol

Absolute maximum ratings (Ta=25°C)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$V_{CBO}$	Collector-base voltage	2SD2374	60	V
		2SD2374A	80	
$V_{CEO}$	Collector-emitter voltage	2SD2374	60	V
		2SD2374A	80	
$V_{EBO}$	Emitter-base voltage	Open collector	6	V
$I_C$	Collector current		3	A
$I_{CM}$	Collector current-peak		5	A
$P_C$	Collector dissipation	$T_a=25^\circ C$	2	W
		$T_C=25^\circ C$	25	
$T_j$	Junction temperature		150	°C
$T_{stg}$	Storage temperature		-55~150	°C

## Silicon NPN Power Transistors

## 2SD2374 2SD2374A

## CHARACTERISTICS

T<sub>j</sub>=25°C unless otherwise specified

www.datasheet4u.com

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>CEO</sub>	Collector-emitter voltage	2SD2374	I <sub>C</sub> =30mA ; I <sub>B</sub> =0	60			V
		2SD2374A		80			
V <sub>CEsat</sub>	Collector-emitter saturation voltage		I <sub>C</sub> =3A ; I <sub>B</sub> =0.375A			1.2	V
V <sub>BE</sub>	Base-emitter voltage		I <sub>C</sub> =3A ; V <sub>CE</sub> =4V			1.8	V
I <sub>CBO</sub>	Collector cut-off current	2SD2374	V <sub>CB</sub> =60V ; I <sub>E</sub> =0			200	μA
		2SD2374A	V <sub>CB</sub> =80V ; I <sub>E</sub> =0				
I <sub>CEO</sub>	Collector cut-off current	2SD2374	V <sub>CE</sub> =30V ; I <sub>B</sub> =0			300	μA
		2SD2374A	V <sub>CE</sub> =60V ; I <sub>B</sub> =0				
I <sub>EBO</sub>	Emitter cut-off current		V <sub>EB</sub> =6V ; I <sub>C</sub> =0			1	mA
h <sub>FE-1</sub>	DC current gain		I <sub>C</sub> =1A ; V <sub>CE</sub> =4V	70		250	
h <sub>FE-2</sub>	DC current gain		I <sub>C</sub> =3A ; V <sub>CE</sub> =4V	10			
f <sub>T</sub>	Transition frequency		I <sub>C</sub> =0.5A ; V <sub>CE</sub> =10V		30		MHz

## Switching times

t <sub>on</sub>	Turn-on time	I <sub>C</sub> =1.0A ; I <sub>B1</sub> =-I <sub>B2</sub> =0.1A V <sub>CC</sub> =50V		0.5		μs
t <sub>s</sub>	Storage time			2.5		μs
t <sub>f</sub>	Fall time			0.4		μs

◆ h<sub>FE-1</sub> Classifications

Q	P
70-150	120-250

Silicon NPN Power Transistors

2SD2374 2SD2374A

PACKAGE OUTLINE

www.datasheet4u.com

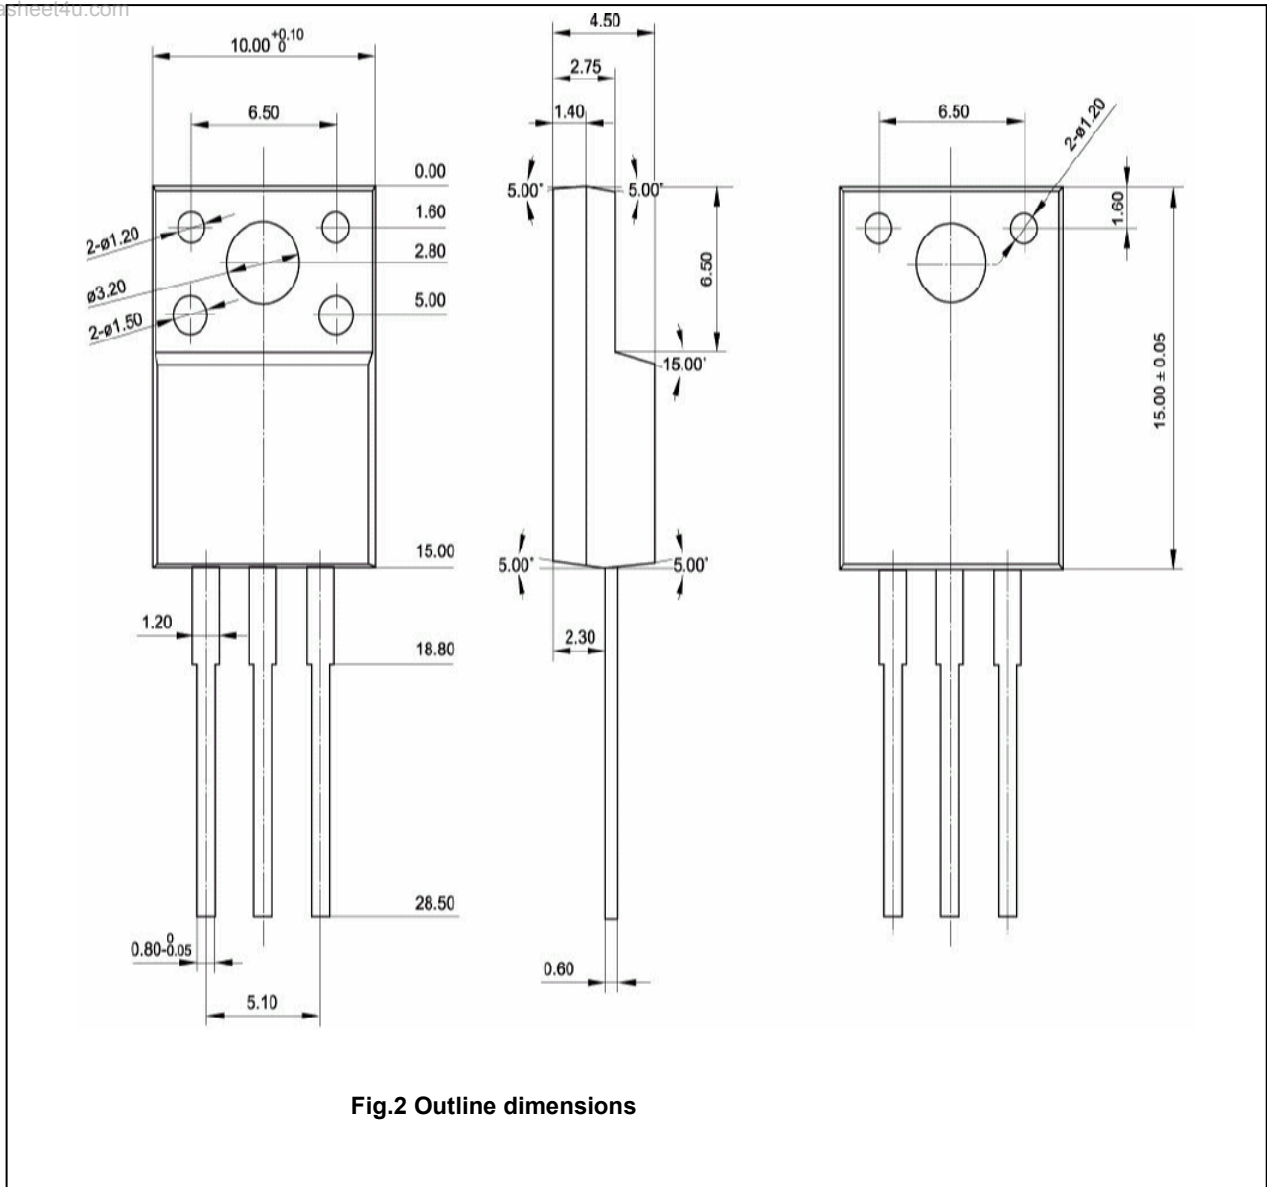


Fig.2 Outline dimensions

Silicon NPN Power Transistors

2SD2374 2SD2374A

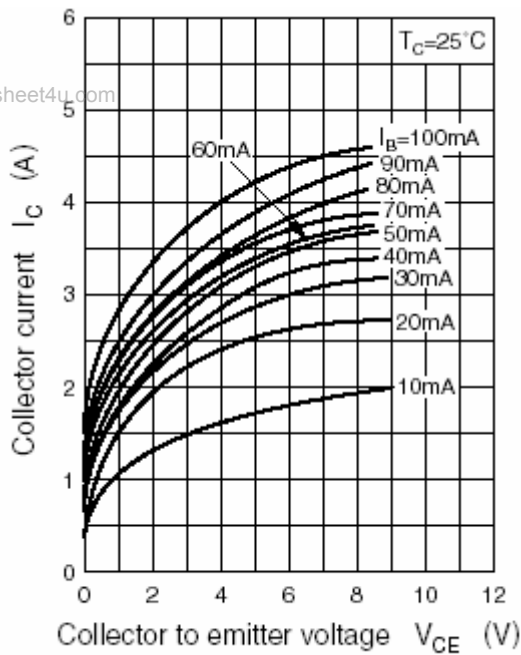


Fig.3 Static Characteristic

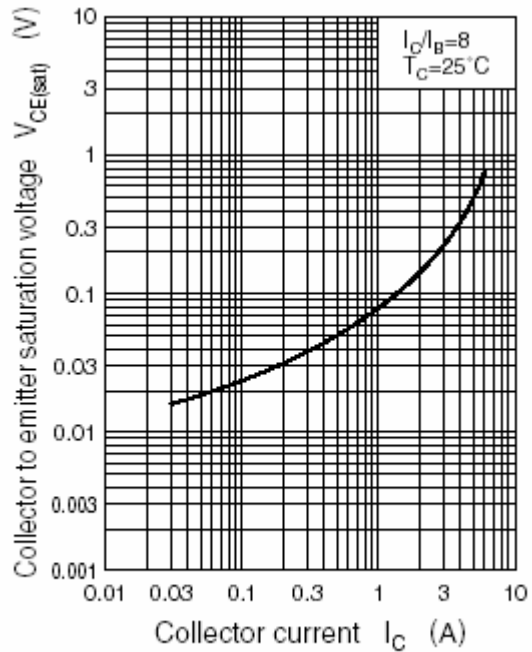


Fig.4 Collector-Emitter Saturation Voltage

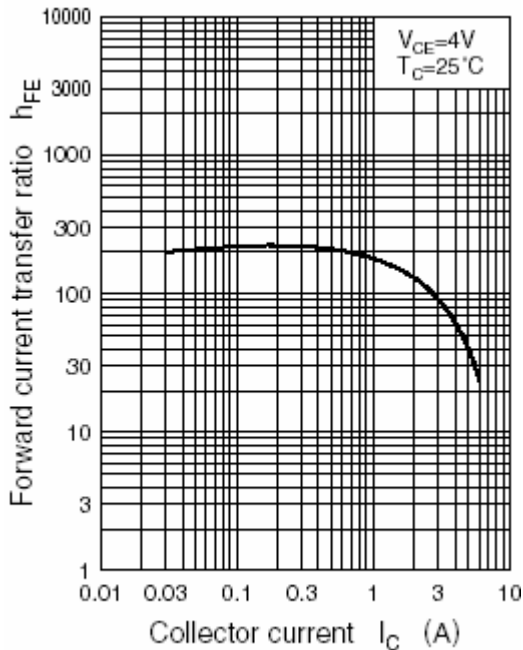


Fig.5 DC current Gain

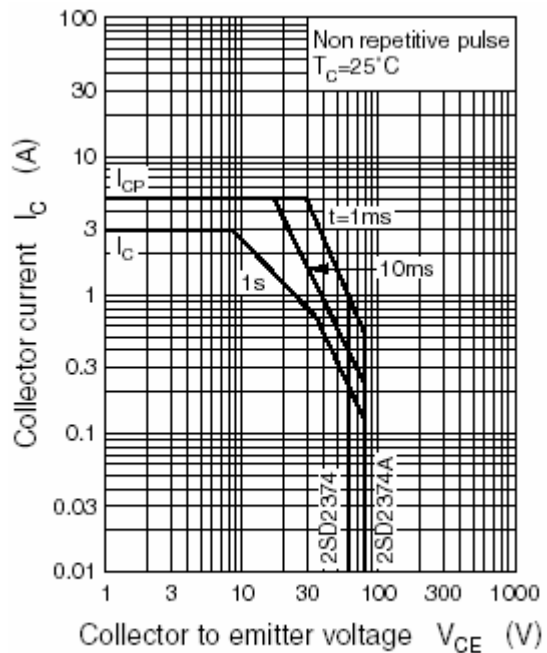


Fig.6 Safe Operating Area