

Power Transistor (-80V, -1A)

2SB1260 / 2SB1181 / 2SB1241


● **Features**

- 1) High breakdown voltage and high current.
 $BV_{CEO} = -80V, I_C = -1A$
- 2) Good h_{FE} linearity.
- 3) Low $V_{CE(sat)}$.
- 4) Complements the 2SD1898 / 2SD1863 / 2SD1733.

● **Structure**

Epitaxial planar type
 PNP silicon transistor

● **External dimensions (Units : mm)**

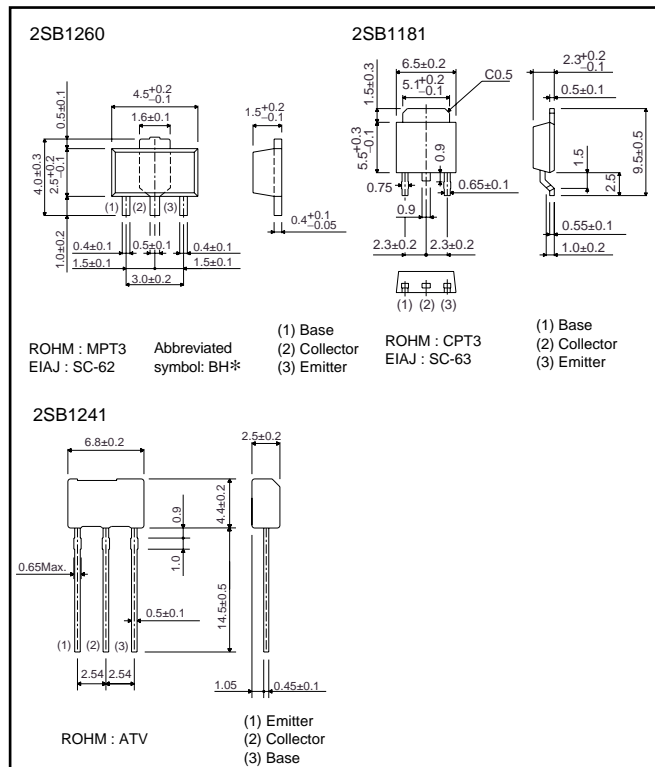

* Denotes h_{FE}

● **Absolute maximum ratings ($T_a = 25^\circ C$)**

Parameter	Symbol	Limits	Unit
Collector-base voltage	V_{CB0}	-80	V
Collector-emitter voltage	V_{CE0}	-80	V
Emitter-base voltage	V_{EB0}	-5	V
Collector current	I_C	-1	A(DC)
	I_{CP}	-2	A(Pulse) *1
Collector power dissipation	2SB1260	0.5	W *2
	2SB1241, 2SB1181	2	
	2SB1181	1	W($T_C = 25^\circ C$) *3
Junction temperature	T_j	150	$^\circ C$
Storage temperature	T_{stg}	-55~+150	$^\circ C$

*1 Single pulse, $P_w = 100ms$

*2 When mounted on a 40×40×0.7 mm ceramic board.

*3 Printed circuit board, 1.7mm thick, collector copper plating 100mm² or larger.



Transistors

●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	
Collector-base breakdown voltage	BV _{CB0}	-80	-	-	V	I _C =-50μA	
Collector-emitter breakdown voltage	BV _{CEO}	-80	-	-	V	I _C =-1mA	
Emitter-base breakdown voltage	BV _{EB0}	-5	-	-	V	I _E =-50μA	
Collector cutoff current	I _{CB0}	-	-	-1	μA	V _{CB} =-60V	
Emitter cutoff current	I _{EB0}	-	-	-1	μA	V _{EB} =-4V	
Collector-emitter saturation voltage	V _{CE(sat)}	-	-	-0.4	V	I _C /I _B =-500mA/-50mA	
DC current transfer ratio	2SB1260, 2SB1181	h _{FE}	82	-	390	-	V _{CE} =-3V, I _C =-0.1A
	2SB1241		120	-	390	-	
Transition frequency	2SB1260, 2SB1241	f _T	-	100	-	MHz	V _{CE} =-5V, I _E =50mA, f=30MHz
	2SB1181		-	100	-	MHz	V _{CE} =-10V, I _E =50mA, f=30MHz
Output capacitance	C _{ob}	-	25	-	pF	V _{CB} =-10V, I _E =0A, f=1MHz	

●Packaging specifications and h_{FE}

Type	h _{FE}	Package	Taping		
		Code	TL	TV2	T100
		Basic ordering unit (pieces)	2500	2500	1000
2SB1260	PQR	-	-	○	
2SB1241	QR	-	○	-	
2SB1181	PQR	○	-	-	

h_{FE} values are classified as follows :

Item	P	Q	R
h _{FE}	82~180	120~270	180~390

●Electrical characteristic curves

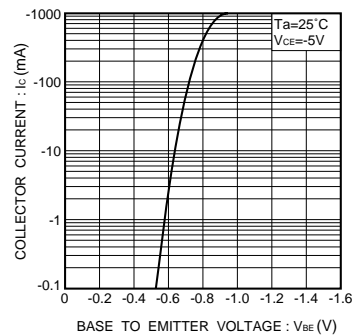


Fig.1 Grounded emitter propagation characteristics




Fig.2 Grounded emitter output characteristics




Fig.3 DC current gain vs. collector current

Transistors




Fig.4 Collector-emitter saturation voltage vs. collector current




Fig.5 Gain bandwidth product vs. emitter current

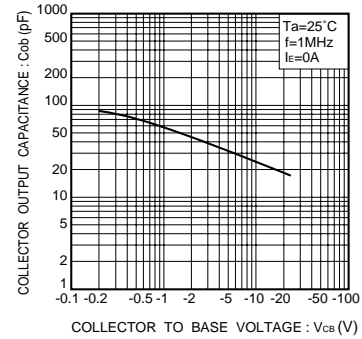


Fig.6 Collector output capacitance vs. collector-base voltage




Fig. 7 Emitter input capacitance vs. emitter-base voltage

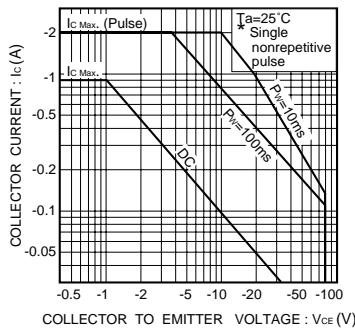


Fig. 8 Safe operating area (2SB1260)

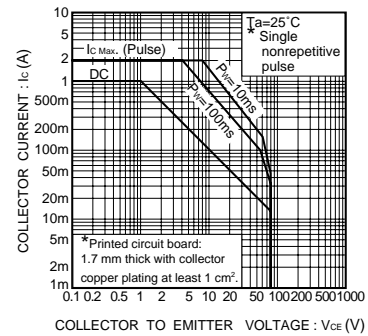


Fig.9 Safe operating area (2SB1241)

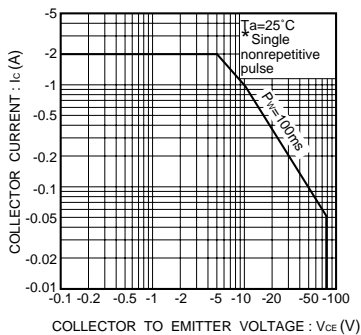


Fig.10 Safe operating area (2SB1181)