

KSH13007A

SemiHow
Know-How for Semiconductor

KSH13007A

Switch Mode series NPN silicon Power Transistor


- High voltage, high speed power switching
- Suitable for switching regulator, inverters motor controls

Absolute Maximum Ratings TC=25°C unless otherwise noted

8 Amperes
NPN Silicon Power Transistor
80 Watts

| CHARACTERISTICS | SYMBOL | RATING | UNIT |
|------------------------------------|-----------|---------|------|
| Collector-Base Voltage | V_{CBO} | 700 | V |
| Collector-Emitter Voltage | V_{CEO} | 400 | V |
| Emitter-Base Voltage | V_{EBO} | 9 | V |
| Collector Current(DC) | I_C | 8 | A |
| Collector Current(Pulse) | I_{CP} | 16 | A |
| Base Current | I_B | 4 | A |
| Collector Dissipation(Tc=25°C) | P_C | 80 | W |
| Max Operating Junction Temperature | T_J | 150 | °C |
| Storage Temperature | T_{STG} | -65~150 | °C |

TO-220
1. Base
2. Collector
3. Emitter



Electrical Characteristics TC=25°C unless otherwise noted

| CHARACTERISTICS | SYMBOL | Test Condition | Min | Typ. | Max | Unit |
|---------------------------------------|------------------------|--|--------|------|-------------|-------------|
| Collector-Emitter Breakdown Voltage | V_{CEO} | $I_C=10mA, I_B=0$ | 400 | | | V |
| Emitter Cut-off Current | I_{EBO} | $V_{EB}=9V, I_C=0$ | | | 1 | mA |
| *DC Current Gain | h_{FE1} h_{FE2} | $V_{CE}=5V, I_C=2A$ $V_{CE}=5V, I_C=5A$ | 8 5 | | 60 30 | |
| *Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | $I_C=2A, I_B=0.4A$ $I_C=5A, I_B=1A$ $I_C=8A, I_B=2A$ | | | 1 2 3 | V V V |
| *Base-Emitter Saturation Voltage | $V_{BE(sat)}$ | $I_C=2A, I_B=0.4A$ $I_C=5A, I_B=1A$ | | | 1.2 1.6 | V V |
| Output Capacitance | C_{ob} | $V_{CB}=10V, f=0.1MHz$ | | 80 | | pF |
| Current Gain Bandwidth Product | f_T | $V_{CE}=10V, I_C=0.5A$ | 4 | | | MHz |
| Turn on Time | t_{on} | $V_{CC}=125V, I_C=5A$ $I_{B1}=1A, I_{B2}=-1A$ $R_L=50\Omega$ | | | 1.6 | μs |
| Storage Time | t_{stg} | | | | 3.0 | μs |
| Fall Time | t_f | | | | 0.7 | μs |

* Pulse Test: Pulse Width \leq 300 μs , Duty Cycles \leq 2%

Note.

Package Mark information.

| | | | | | |
|--------------------------------|---|----------------------|--|-----|-----------------------------|
| hFE1 Classification | R | 15 ~ 28 | S YWW Z KSH13007A | S | SemiHow Symbol |
| | O | 26 ~ 39 | | YWW | Y; year code, WW; week code |
| | | O1(26~33), O2(31~39) | | Z | hFE1 Classification |
| | Y | 37 ~ 50 | | | |

Typical Characteristics

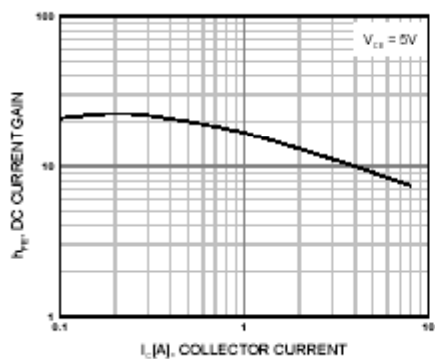


Figure 1. DC current Gain

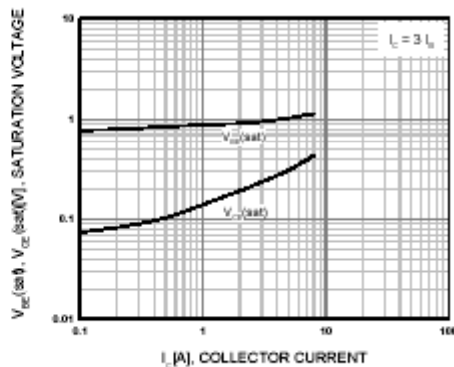


Figure 2. Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

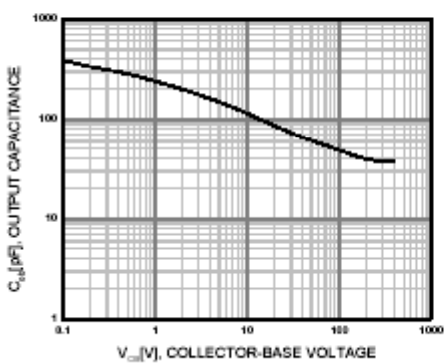


Figure 3. Collector Output Capacitance

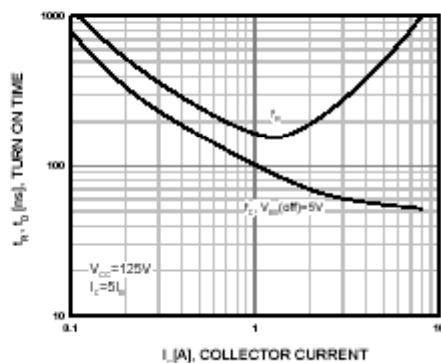


Figure 4. Turn On Time

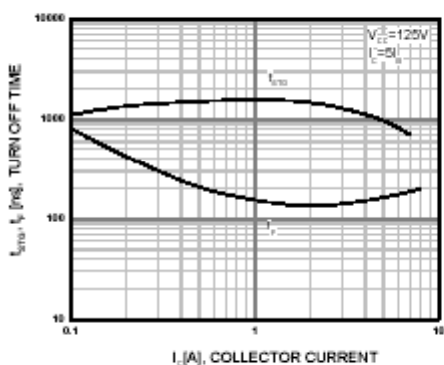


Figure 5. Turn Off Time

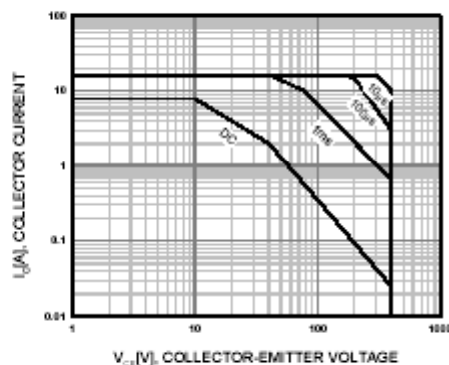


Figure 6. Forward Bias Safe Operating Area

Typical Characteristics (Continued)

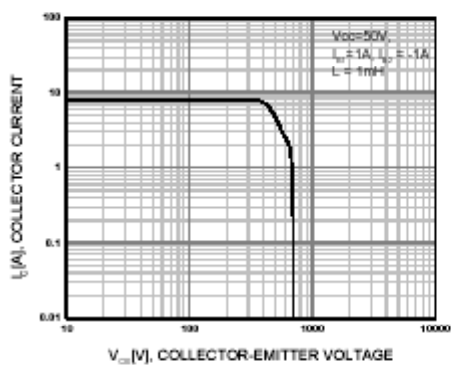


Figure 7. Reverse Bias Safe Operating Area


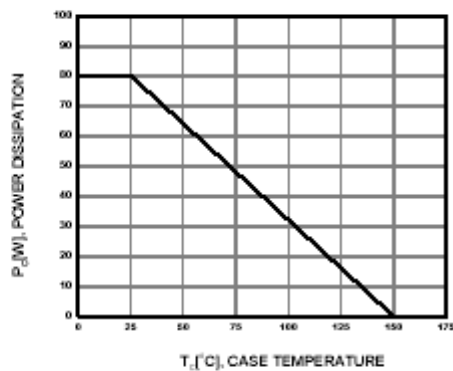


Figure 8. Power Derating

Package Dimension


TO-220 (A)

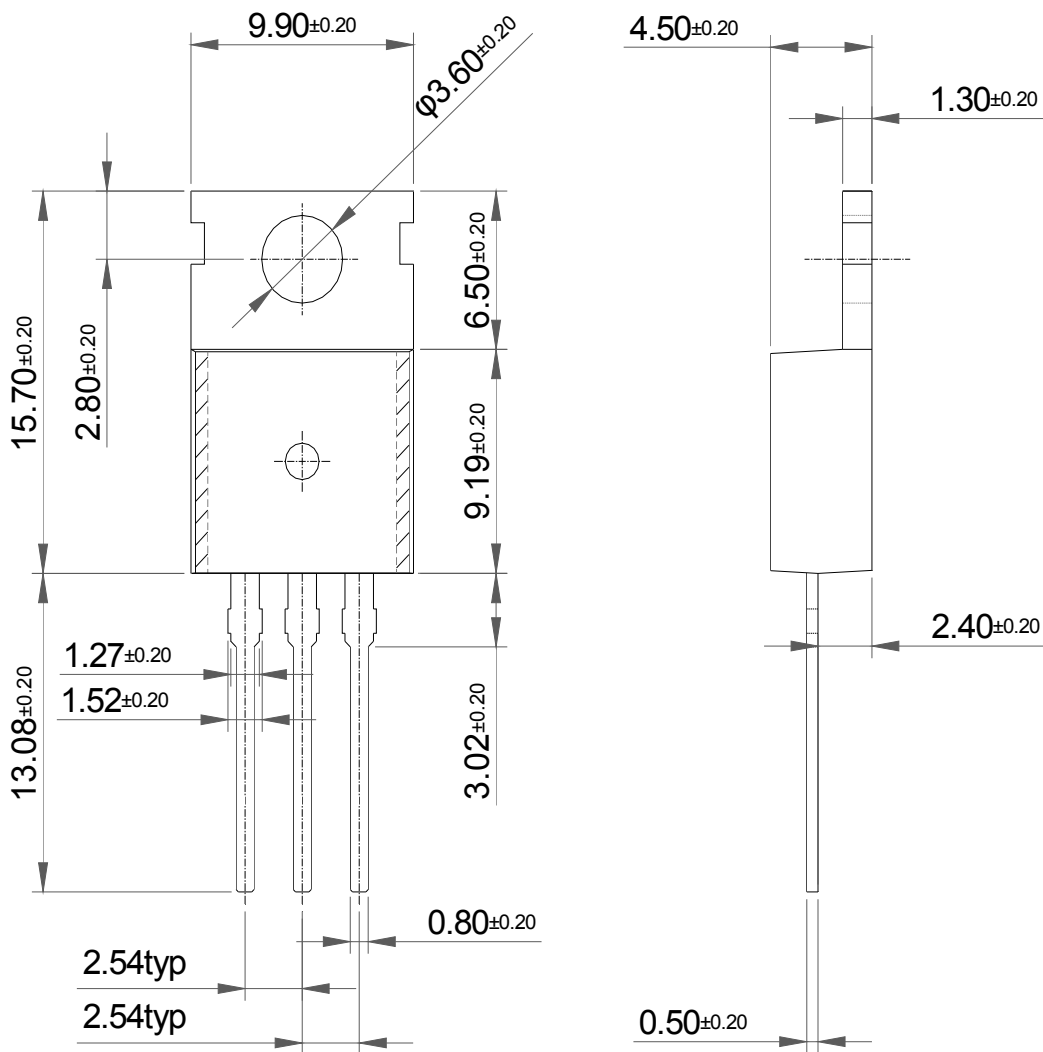

Dimensions in Millimeters

Package Dimension

TO-220 (B)

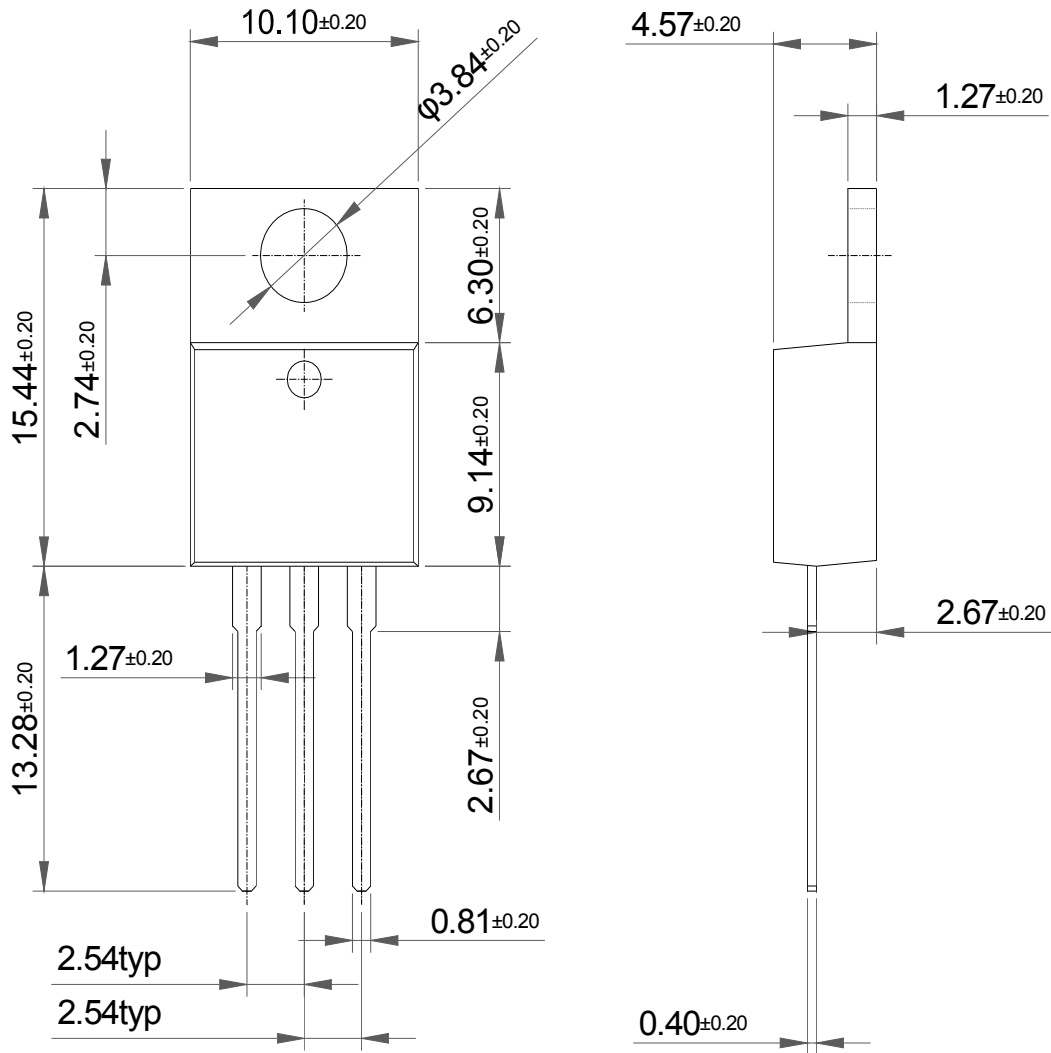

Dimensions in Millimeters

© SEMIHOW REV.A1, Oct 2007

KSH13007A