



2SC2275


NPN EPITAXIAL SILICON TRANSISTOR

LOW FREQUENCY POWER AMPLIFIER

- Complement to 2SA985

ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CB0}	120	V
Collector-Emitter Voltage	V_{CE0}	120	V
Emitter-Base voltage	V_{EB0}	7	V
Collector Current (DC)	I_C	1.5	A
Collector Dissipation ($T_c=25^\circ\text{C}$)	P_C	25	W
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-50~150	$^\circ\text{C}$

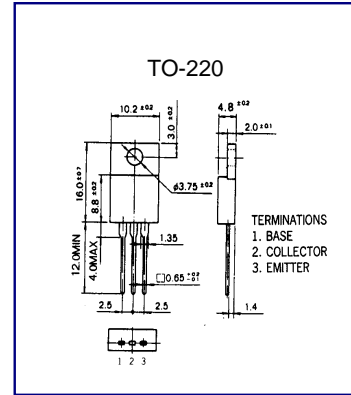

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector Cutoff Current	I_{CB0}	$V_{CB} = 120\text{V}, I_E = 0$			100	μA
Emitter Cutoff Current	I_{EB0}	$V_{EB} = 7\text{V}, I_C = 0$			100	μA
DC Current Gain	h_{FE1}	$V_{CE} = 5\text{V}, I_C = 0.3\text{A}$		150		
Collector- Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 2\text{A}, I_B = 0.2\text{A}$			1.5	V
Current Gain Bandwidth Product	f_T	$V_{CE} = 5\text{V}, I_C = 0.5\text{A}$		180		MHZ

Wing Shing Computer Components Co., (H.K.)Ltd.
 Homepage: <http://www.wingshing.com>

Tel:(852)2341 9276 Fax:(852)2797 8153
 E-mail: wsccltd@hkstar.com