

MP Series



Film Resistors



- Resistances from 100Ohm to 2MOhms
- Power Rating to 0.5Watts
- Resistance Tolerances to $\pm 0.01\%$
- TCR's to $\pm 5\text{ppm/K}$
- Convenient RN Type Package Styles

SPECIFICATIONS

Type	MP55	MP60	MP65	MP70
MIL-R-10509F	RN55	RN60	RN65	RN70
DIN-44061	0207	0411	0617	0719
Resistance Range	10Ohms to 2MOhms			
Power rating (70°C)	0.25W	0.5W	0.75W	1W
Tolerances	0.02% / 0.05% / 0.10% / 0.25% / 0.5% / 1%			
Temperature Coefficient	5 / 10 / 15 / 25ppm/°C			
Operating Voltage (Umax)	250V	300V	350V	400V
Short Time Overload Voltage	500V	600V	700V	800V
Operating Temperature Range	-55 to 155°C			
Max. Resistance Change at rated power $\Delta R/R$ max after 1000h	$\leq 0.025\%$		$\leq 0.05\%$	
Insulation Resistance	$> 1\text{G}$			
Insulation Voltage	$> 500\text{V}$			
Dimensions in mm [inches]				
L	6.8 [0.27]	10.0 [0.39]	15 [0.98]	18.3 [0.72]
D	2.5 [0.1]	3.7 [0.15]	5.2 [0.20]	6.5 [0.26]
d	0.6 [0.024]	0.6 [0.024]	0.6 [0.024]	0.8 [0.031]
Tolerance	± 0.1 [0.003]	± 0.1 [0.003]	± 0.1 [0.003]	± 0.1 [0.003]

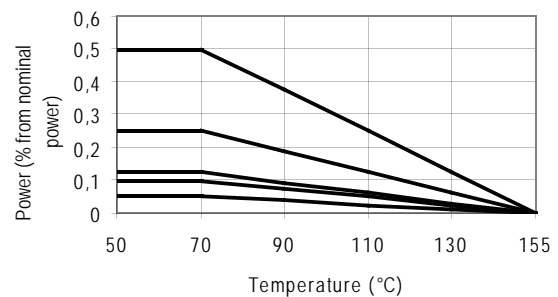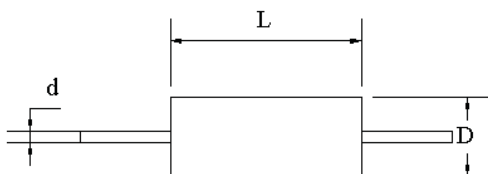

Ordering Information

Part Number - Resistance - Tolerance
MP55 100 Ohms 0.5%

Riedon Inc.

300 Cypress Avenue

Alhambra CA 91801

(626) 284-9901

(626) 284-1704

www.riedon.com