


MECHANICAL DATA

Dimensions in mm

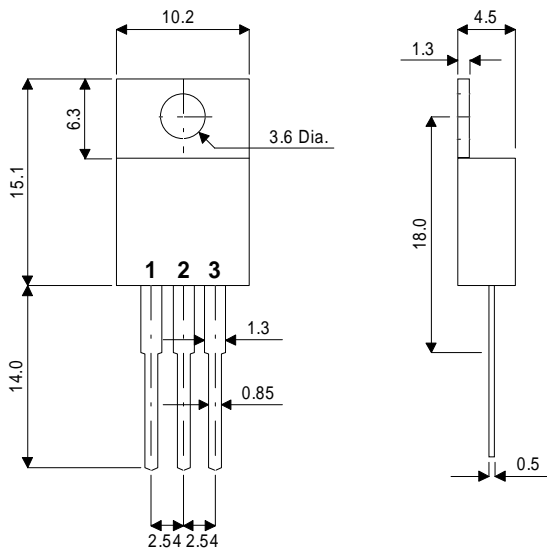

TO220

Pin 1 – Base Pin 2 – Collector Pin 3 – Emitter

**ADVANCED
DISTRIBUTED BASE DESIGN
HIGH VOLTAGE
HIGH SPEED NPN
SILICON POWER TRANSISTOR**

Designed for use in
electronic ballast applications

- SEMEFAB DESIGNED AND DIFFUSED DIE
- HIGH VOLTAGE
- FAST SWITCHING
- HIGH ENERGY RATING
- MILITARY AND HI-REL VERSIONS
AVAILABLE IN METAL AND CERAMIC
SURFACE MOUNT PACKAGES

FEATURES

- Multi-base for efficient energy distribution across the chip resulting in significantly improved switching and energy ratings across full temperature range.
- Ion implant and high accuracy masking for tight control of characteristics from batch to batch.
- Triple Guard Rings for improved control of high voltages.

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

V_{CBO}	Collector – Base Voltage	800V
V_{CEO}	Collector – Emitter Voltage ($I_B = 0$)	400V
V_{EBO}	Emitter – Base Voltage ($I_C = 0$)	10V
I_C	Continuous Collector Current	8A
$I_{C(PK)}$	Peak Collector Current	12A
I_B	Base Current	4A
P_{tot}	Total Dissipation at $T_{case} = 25^{\circ}C$	100W
T_{stg}	Operating and Storage Temperature Range	-55 to +150°C

ELECTRICAL CHARACTERISTICS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit	
ELECTRICAL CHARACTERISTICS						
$V_{CEO(sus)}$	Collector – Emitter Sustaining Voltage	$I_C = 10mA$	400		V	
$V_{(BR)CBO}$	Collector – Base Breakdown Voltage	$I_C = 1mA$	800			
$V_{(BR)EBO}$	Emitter – Base Breakdown Voltage	$I_E = 1mA$	10			
I_{CBO}	Collector – Base Cut-Off Current	$V_{CB} = 800V$ $T_C = 125^{\circ}C$		10 100	μA	
I_{CEO}	Collector – Emitter Cut-Off Current	$I_B = 0$ $V_{CE} = 400V$		100	μA	
I_{EBO}	Emitter Cut-Off Current	$V_{EB} = 9V$ $I_C = 0$ $T_C = 125^{\circ}C$		10 100	μA	
h_{FE}^*	DC Current Gain	$I_C = 100mA$ $V_{CE} = 5V$	20	30	—	
		$I_C = 1A$ $V_{CE} = 5V$	15	25		45
		$I_C = 3A$ $V_{CE} = 1V$	10	15		
		$T_C = 125^{\circ}C$	5			
$V_{CE(sat)}^*$	Collector – Emitter Saturation Voltage	$I_C = 100mA$ $I_B = 20mA$		0.05	0.1	V
		$I_C = 1A$ $I_B = 0.2A$		0.1	0.2	
		$I_C = 2A$ $I_B = 0.4A$		0.15	0.3	
		$I_C = 3A$ $I_B = 0.6A$		0.3	0.5	
$V_{BE(sat)}^*$	Base – Emitter Saturation Voltage	$I_C = 1A$ $I_B = 0.2A$		0.8	1.0	V
		$I_C = 2A$ $I_B = 0.4A$		0.9	1.1	
		$I_C = 3A$ $I_B = 0.6A$		0.95	1.2	
DYNAMIC CHARACTERISTICS						
f_t	Transition Frequency	$I_C = 0.2A$ $V_{CE} = 4V$		20	MHz	
C_{ob}	Output Capacitance	$V_{CB} = 20V$ $f = 1MHz$		40	pF	

* Pulse test $t_p = 300\mu s$, $\delta < 2\%$