


**MECHANICAL DATA**

Dimensions in mm

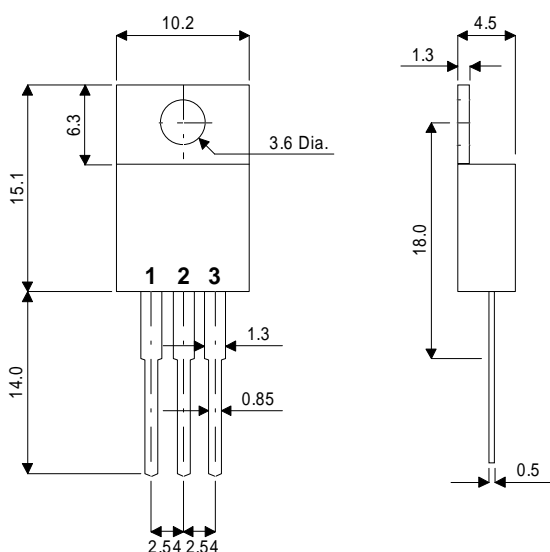

**TO220**

Pin 1 – Base      Pin 2 – Collector      Pin 3 – Emitter

**ADVANCED  
DISTRIBUTED BASE DESIGN  
HIGH VOLTAGE  
HIGH SPEED NPN  
SILICON POWER TRANSISTOR**

Designed for use in  
electronic ballast applications

- SEMEFAB DESIGNED AND DIFFUSED DIE
- HIGH VOLTAGE
- FAST SWITCHING
- HIGH ENERGY RATING

**FEATURES**

- Multi-base for efficient energy distribution across the chip resulting in significantly improved switching and energy ratings across full temperature range.
- Ion implant and high accuracy masking for tight control of characteristics from batch to batch.
- Triple Guard Rings for improved control of high voltages.

**ABSOLUTE MAXIMUM RATINGS** ( $T_{case} = 25^{\circ}C$  unless otherwise stated)

$V_{CBO}$	Collector – Base Voltage ( $I_E = 0$ )	350V
$V_{CEO}$	Collector – Emitter Voltage ( $I_B = 0$ )	160V
$V_{EBO}$	Emitter – Base Voltage ( $I_C = 0$ )	10V
$I_C$	Continuous Collector Current	16A
$I_{C(PK)}$	Peak Collector Current	22A
$I_B$	Base Current	5A
$P_{tot}$	Total Dissipation at $T_{case} = 25^{\circ}C$	85W
$T_{stg}$	Operating and Storage Temperature Range	-55 to +150°C

**ELECTRICAL CHARACTERISTICS** ( $T_{case} = 25^{\circ}C$  unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
<b>ELECTRICAL CHARACTERISTICS</b>					
$V_{CEO(sus)}$	Collector – Emitter Sustaining Voltage	$I_C = 10mA$	160		V
$V_{(BR)CBO}$	Collector – Base Breakdown Voltage	$I_C = 1mA$	350		
$V_{(BR)EBO}$	Emitter – Base Breakdown Voltage	$I_E = 1mA$	10		
$I_{CBO}$	Collector – Base Cut-Off Current	$V_{CB} = 350V$ $T_C = 125^{\circ}C$		10 100	$\mu A$
$I_{CEO}$	Collector – Emitter Cut-Off Current	$I_B = 0$ $V_{CE} = 150V$		100	$\mu A$
$I_{EBO}$	Emitter Cut-Off Current	$V_{EB} = 9V$ $I_C = 0$ $T_C = 125^{\circ}C$		10 100	$\mu A$
$h_{FE}^*$	DC Current Gain	$I_C = 0.3A$ $V_{CE} = 5V$	30	80	—
		$I_C = 5A$ $V_{CE} = 5V$	25	60	
		$I_C = 12A$ $V_{CE} = 1V$ $T_C = 125^{\circ}C$	5		
$V_{CE(sat)}^*$	Collector – Emitter Saturation Voltage	$I_C = 1A$ $I_B = 0.1A$		0.07 0.2	V
		$I_C = 5A$ $I_B = 0.5A$		0.2 0.6	
		$I_C = 10A$ $I_B = 1.0A$		0.6 1.2	
$V_{BE(sat)}^*$	Base – Emitter Saturation Voltage	$I_C = 5A$ $I_B = 0.5A$		0.95 1.2	V
		$I_C = 10A$ $I_B = 1.0A$		1.2 1.8	
<b>DYNAMIC CHARACTERISTICS</b>					
$f_t$	Transition Frequency	$I_C = 0.2A$ $V_{CE} = 4V$		20	MHz
$C_{ob}$	Output Capacitance	$V_{CB} = 10V$ $f = 1MHz$		75	pF

\* Pulse test  $t_p = 300\mu s$ ,  $\delta < 2\%$